



VALUE AT THE SPINDLE®

High Performance Drills



Hole Making

HIGH PERFORMANCE DRILLS	SERIES	DESCRIPTION	APPLICATION ● PREFERRED ○ ALTERNATE	PAGE
Hi-PerCarb®	135 (3xD)	2 Flute External Coolant Double Margin 3xD		231
	135 (5xD)	2 Flute External Coolant Double Margin 5xD		240
	131N (3xD)	3 Flute External Coolant Triple Margin 3xD		250
	131N (5xD)	3 Flute External Coolant Triple Margin 5xD		254
	141K (5xD)	3 Flute Internal Coolant Triple Margin 5xD		260
Ice-Carb®	140 (5xD)	2 Flute Internal Coolant 5xD		266
	140 (8xD)	2 Flute Internal Coolant 8xD		274
CFRP 8 Facet	120	2 Flute External Coolant Double Margin CFRP		282

Speed & Feed Recommendations listed after each series

Taladrado

BROCAS DE ALTO RENDIMIENTO	SERIE	DESCRIPCIÓN	APPLICATION ● PREFERRED ○ ALTERNATE	PÁGINA
Hi-PerCarb®	135 (3xD)	2 filos, refrigeración externa, doble margen, 3xD		231
	135 (5xD)	2 filos, refrigeración externa, doble margen, 5xD		240
	131N (3xD)	3 filos, refrigeración externa, triple margen, 3xD		250
	131N (5xD)	3 filos, refrigeración externa, triple margen, 5xD		254
	141K (5xD)	3 filos, refrigeración interna, triple margen, 5xD		260
Ice-Carb®	140 (5xD)	2 filos, refrigeración interna, 5xD		266
	140 (8xD)	2 filos, refrigeración interna, 8xD		274
De 8 caras CFRP	120	2 filos, refrigeración externa, doble margen, CFRP		282

Recomendaciones de velocidades y avances mostradas tras cada serie

🇫🇷 Outils de perçage

FORETS HAUTE PERFORMANCE	SÉRIES	DESCRIPTION	APPLICATION ● PREFERRED ○ ALTERNATE	PAGE
Hi-PerCarb®	135 (3xD)	2 dents refroidissement externe à double listel 3xD	● ● ○ ● ● ○	231
	135 (5xD)	2 dents refroidissement externe à double listel 5xD	● ● ○ ● ● ○	240
	131N (3xD)	3 dents refroidissement externe à triple listel 3xD	●	250
	131N (5xD)	3 dents refroidissement externe à triple listel 5xD	●	254
	141K (5xD)	3 dents refroidissement interne à triple listel 5xD	●	260
Ice-Carb®	140 (5xD)	2 dents refroidissement interne 5xD	● ● ○ ● ● ○	266
	140 (8xD)	2 dents refroidissement interne 8xD	● ● ○ ● ● ○	274
CFRP à 8 facettes	120	2 dents refroidissement externe à double listel CFRP	●	282

Recommandations de vitesse et avance indiquées après chaque série

🇩🇪 Bohren




HOCHLEISTUNGS-BOHRER	SERIE	BESCHREIBUNG	APPLICATION ● PREFERRED ○ ALTERNATE	SEITE
Hi-PerCarb®	135 (3xD)	Doppelfasenbohrer 3xD mit 2 Schneiden und Außenkühlung	● ● ○ ● ● ○	231
	135 (5xD)	Doppelfasenbohrer 5xD mit 2 Schneiden und Außenkühlung	● ● ○ ● ● ○	240
	131N (3xD)	Dreifasenbohrer 3xD mit 3 Schneiden und Außenkühlung	●	250
	131N (5xD)	Dreifasenbohrer 5xD mit 3 Schneiden und Außenkühlung	●	254
	141K (5xD)	Dreifasenbohrer 5xD mit 3 Schneiden und Innenkühlung	●	260
Ice-Carb®	140 (5xD)	Bohrer 5xD mit 2 Schneiden und Innenkühlung	● ● ○ ● ● ○	266
	140 (8xD)	Bohrer 8xD mit 2 Schneiden und Innenkühlung	● ● ○ ● ● ○	274
CFRP 8 Facet	120	Doppelfasenbohrer CFRP mit 2 Schneiden und Außenkühlung	●	282

Empfehlungen für Drehzahl & Vorschub im Anhang zu jeder Serie


Drilling Operations

Coolant Recommendations

- Coolant works to mobilize chips away from the cut zone, reduce the heat created during the cutting process and minimize friction.
- It is important to optimize the coolant pressure and position in order to gain the full benefits coolant offers the cutting process.
- Proper coolant application promotes greater operating parameters, greater material removal rates, improved surface finishes, predictable tool life, reduced power consumption and reduced cycle times.
- Pressure is important, but more importantly is consistency of the pressure and application onto the tool; intermittent cooling of carbide leads to thermal stressing of the material and the formation of "microcracks."
- Proper cleanliness and filtration of coolants is important in order for the coolant to maintain its beneficial properties, and also to avoid a reduction in coolant pressure or the possibility of clogging the coolant channels in coolant through drills.

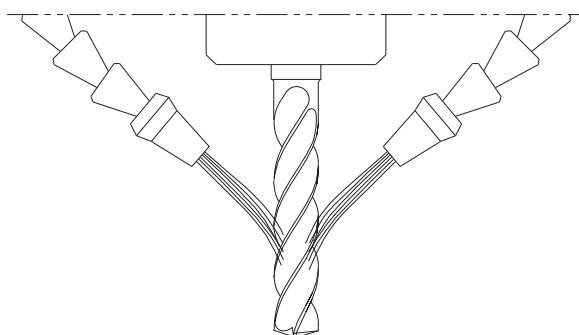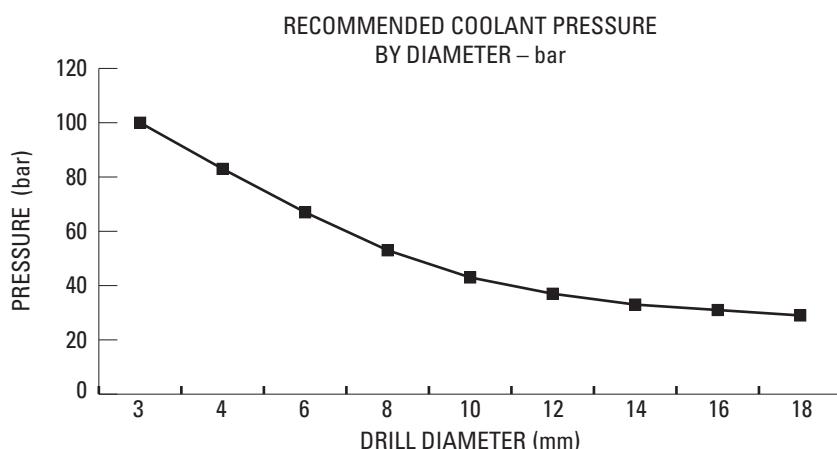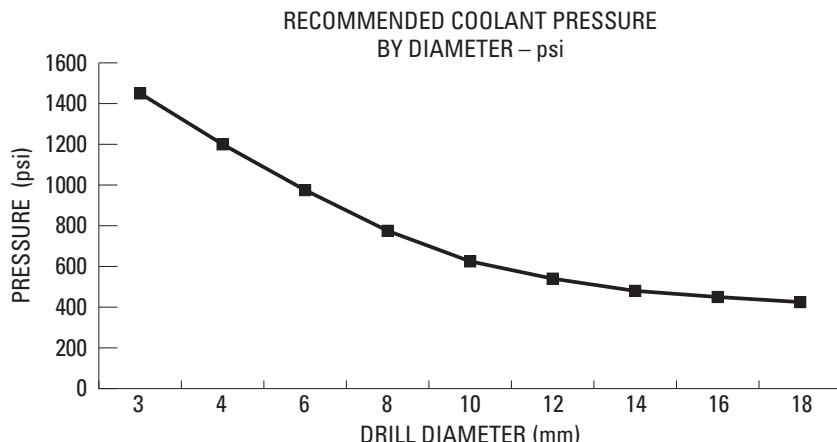

LARGE TIP – LOW VELOCITY
NO COVERAGE AT MAXIMUM DEPTH



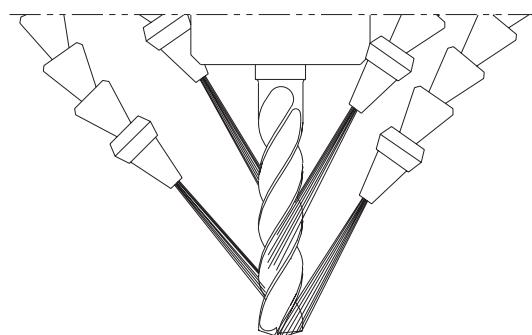


SMALL TIP – HIGH VELOCITY
COMPLETE COVERAGE


- Reducing the nozzle size helps maximize the cooling benefits of the unique double margin design on the Hi-PerCarb drill by increasing velocity. Aim the nozzles in line with the secondary flute located between the two margins as well as the flute for best results.

Recomendaciones en operación de taladrado

- El líquido de refrigeración actúa movilizando las virutas fuera de la zona de corte, disminuyendo el calor generado durante el proceso de corte y minimizando la fricción.
- Es importante optimizar la presión de la refrigeración y la posición para poder obtener todos los beneficios del refrigerante durante el proceso de corte.
- Una aplicación apropiada de la refrigeración fomenta mayores parámetros de operación, mayores índices de eliminación de material, acabados de superficie mejorados, una duración de la herramienta más predecible, bajo consumo de energía y un tiempo de ciclo reducido.
- La presión del refrigerante es importante, pero lo es más el flujo continuo aplicado a la herramienta; una refrigeración intermitente en el carburo puede ocasionar un estrés térmico en el material y la formación de "micro-fisuras".
- Una limpieza y filtración adecuadas son importantes para que el refrigerante mantenga sus propiedades y beneficios; por otra parte, se evita la reducción de la presión o la posibilidad de obstruir los canales de refrigeración de la broca.

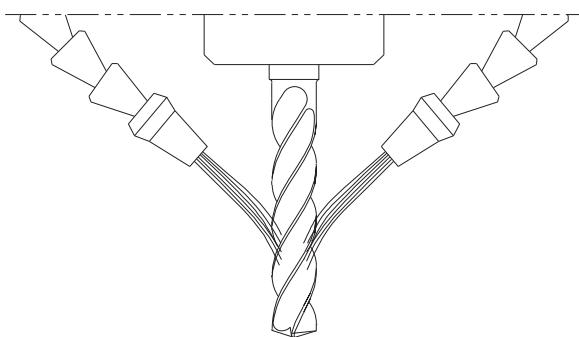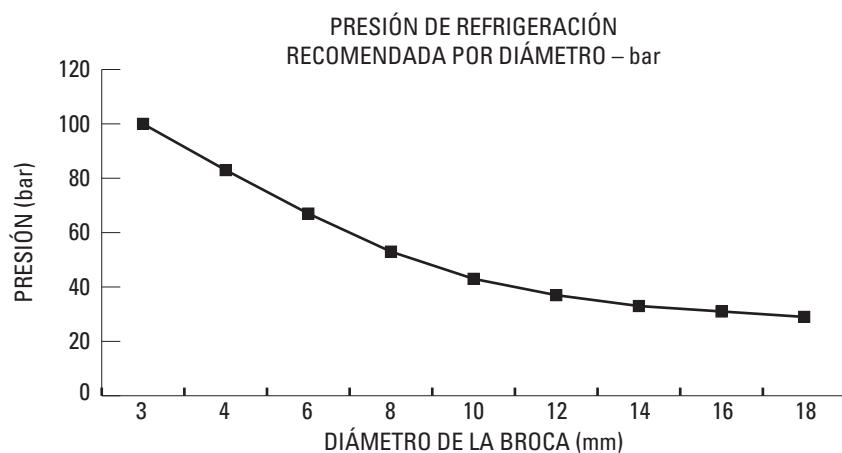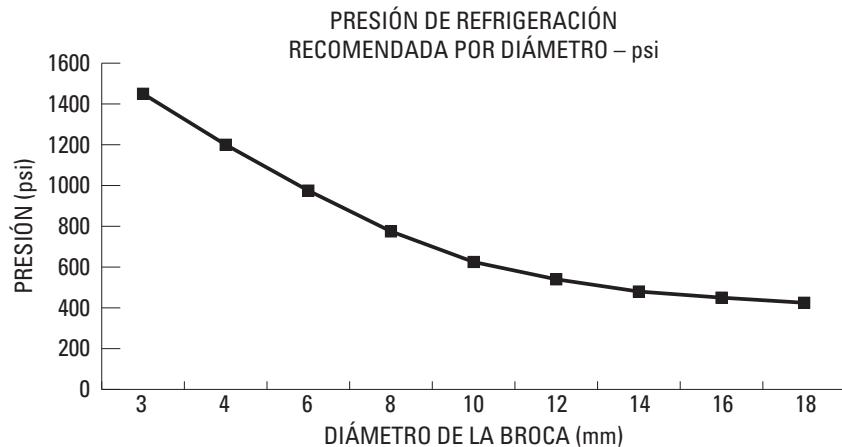

PUNTA GRANDE – BAJA VELOCIDAD
SIN ALCANCE A PROFUNDIDAD MÁXIMA

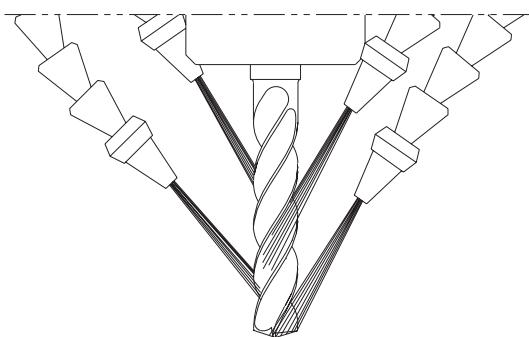




PUNTA PEQUEÑA – ALTA VELOCIDAD
COMPLETO ALCANCE

- Reducir el tamaño de la boquilla ayuda a maximizar los beneficios de refrigeración del exclusivo diseño de doble margen de la broca. Hi-PerCarb aumentando la velocidad. Coloque las boquillas en línea con el segundo filo que se encuentra entre los dos márgenes y también el filo para obtener mejores resultados.


Opérations de perçage

Recommandations en matière de refroidissement

- Le liquide de refroidissement sert à éloigner les copeaux de la zone de coupe, à réduire la chaleur dégagée durant la coupe et à minimiser la friction.
- Il est important d'optimiser la pression et la position du réfrigérant pour en retirer les bénéfices maximums durant la coupe.
- L'application adéquate de réfrigérant se traduit par des paramètres opératoires supérieurs, des taux d'élimination supérieurs des matériaux, de plus belles finitions des surfaces, une durée de vie des outils prévisible, moins de consommation d'énergie et des temps de cycle réduits.
- La pression est importante, mais une pression régulière et l'application sur l'outil sont des facteurs encore plus importants ; le refroidissement intermittent du carbure se traduit par des contraintes thermiques pour le matériau et la formation de microfissures.
- La propreté et le filtrage adéquats des réfrigérants sont importants pour qu'ils conservent leur propriétés, mais aussi pour éviter la réduction de pression du réfrigérant ou le risque d'obturation des conduits à réfrigérant dans les perceuses à réfrigérant intégré.

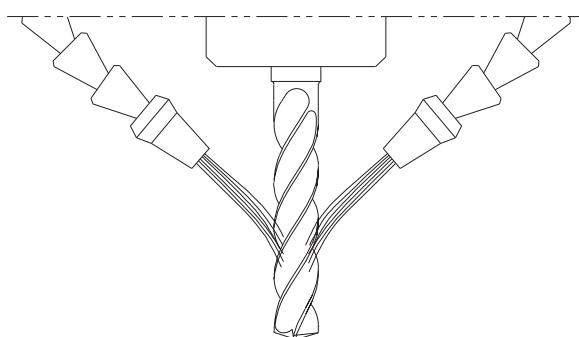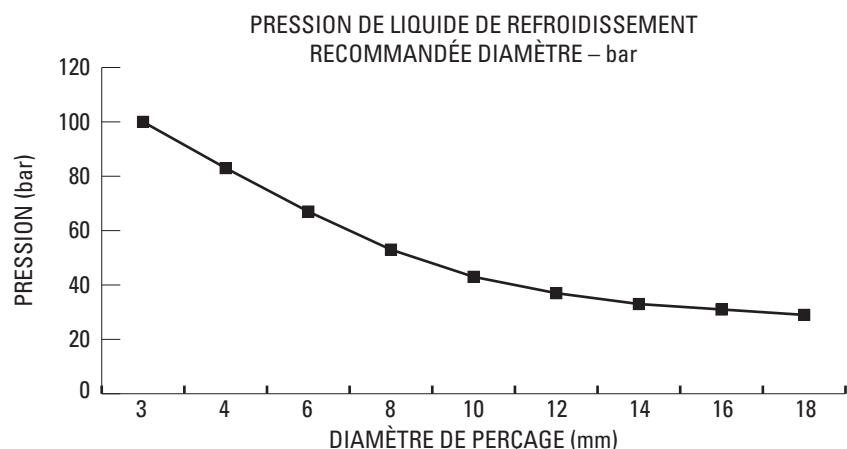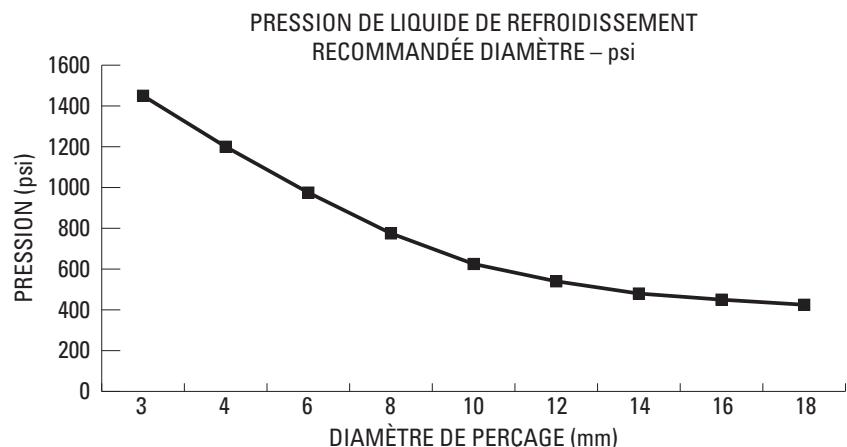

POINTE LARGE – BASSE VITESSE
PAS DE COUVERTURE À LA PROFONDEUR MAXIMUM



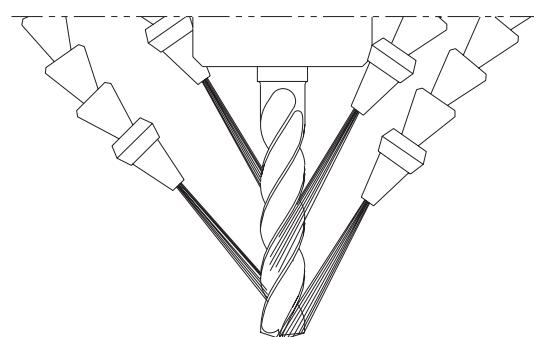


POINTE FINE – GRANDE VITESSE
COUVERTURE COMPLÈTE


- La réduction de la taille de l'embout permet de maximiser les bienfaits du refroidissement du concept à double listel original de la perceuse Hi-PerCarb en augmentant la vitesse. Pour les meilleurs résultats, orientez les embouts dans l'axe de la goujure secondaire située entre les deux listels, de même que la goujure primaire.

Bohrarbeiten Kühlmittelempfehlungen

- Kühlmittel dienen dazu, die Späne aus dem Schneidenbereich zu entfernen, die beim Schneiden erzeugte Wärme abzutransportieren und die Reibung zu verringern.
- Es kommt darauf an, den Külschmiermitteldruck und die Zufuhr zu optimieren, um alle Vorteile beim Bohren nutzen zu können.
- Der richtige Külschmiermitteleinsatz ermöglicht höhere Schnittparameter, höheren Materialabtrag, bessere Oberflächengüte, vorhersehbare Standzeiten und geringere Leistungsaufnahme und Laufzeiten.
- Der Druck ist wichtig, aber wichtiger ist dessen Konstanz und die Zufuhr zum Werkzeug. Unterbrochene Kühlung des Hartmetalls führt zur thermischen Belastung und Bildung von "Mikrorissen".
- Kühlmitte sind sauber zu halten und zu filtern, damit die Qualität des Kühlmittels erhalten bleibt und der Kühlmitteldruck durch Verstopfung der Kühlmittelkanäle im Bohrer nicht absinkt.

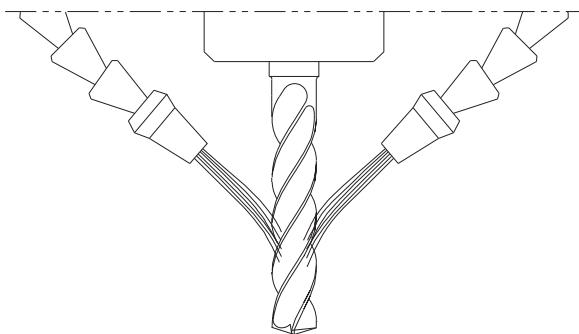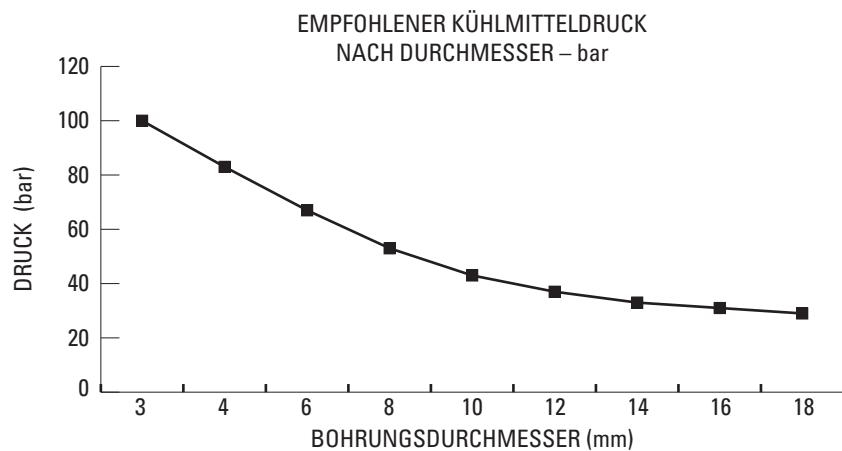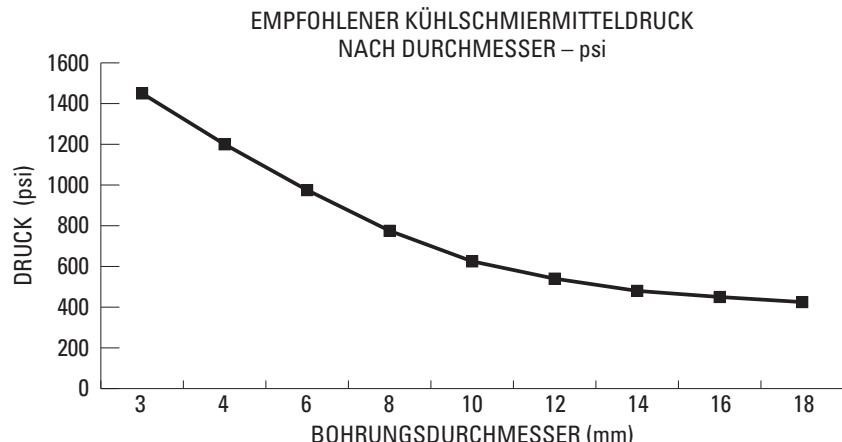


BREITE QUERSCHNEIDE – GERINGE DREHZAHL
KEINE VOLLSTÄNDIGE BENETZUNG BEI MAX. BOHRUNGSTIEFE

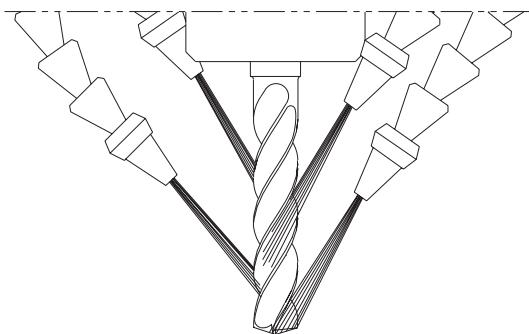

SCHMALE QUERSCHNEIDE – HOHE DREHZAHL
VOLLSTÄNDIGE BENETZUNG

- Durch Verringern der Düsengröße können die vorteilhaften Eigenschaften der Doppelfase genutzt werden, um die Drehzahl des Hi-PerCarb-Bohrers zu steigern. Richten Sie die Düsen auf die Nebennut zwischen beiden Fasen sowie auf die Schneiden aus, um beste Ergebnisse zu erzielen.



TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+,.00047
DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+,.00063
DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+,.00083
DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+,.00098
DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+,.00114
DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012
DCON = h₆

>3-6 DIAMETER

DC = +0,004/+0,016
DCON = h₆

>6-10 DIAMETER

DC = +0,006/+0,021
DCON = h₆

>10-18 DIAMETER

DC = +0,007/+0,025
DCON = h₆

>18-30 DIAMETER

DC = +0,008/+0,029
DCON = h₆

STEELS

STAINLESS STEELS

CAST IRON


HIGH TEMP ALLOYS

TITANIUM

NON-FERROUS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

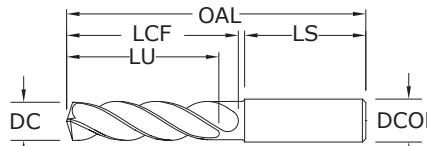

135 3xD

FRACTIONAL & METRIC SERIES

CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	TAP SIZE REFERENCE ONLY	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS	EDP NO. Ti-NAMITE-A (AITIN)
1/64	0.0156	0.40		1/8	1-1/2	1/8	5/64	1	51752*
1/32	0.0312	0.79		1/8	1-1/2	1/4	3/16	1	51269*
3/64	0.0469	1.19	1/16-64	1/8	1-1/2	3/8	5/16	1	51270*
1,25 mm	0.0492			3,0	38,0	9,5	8,0	25,0	64500*
1,45 mm	0.0571			3,0	38,0	9,5	8,0	25,0	64501*
#53	0.0595	1.51		1/8	1-1/2	3/8	5/16	1	64502*
1/16	0.0625	1.59	5/64-60	1/8	2	7/16	3/8	1-1/4	51271*
1,6 mm	0.0630			3,0	50,0	11,0	9,0	32,0	64503*
1,75 mm	0.0689			3,0	50,0	11,0	9,0	32,0	64504*
#50	0.0700	1.78		1/8	2	7/16	3/8	1-1/4	64505*
5/64	0.0781	1.98		1/8	2	1/2	7/16	1-1/4	51272*
#47	0.0785	1.99		1/8	2	1/2	7/16	1-1/4	64506*
2,05 mm	0.0807			3,0	50,0	12,0	11,0	32,0	64507*
#46	0.0810	2.06		1/8	2	1/2	7/16	1-1/4	64508*
#43	0.0890	2.26		1/8	2	1/2	7/16	1-1/4	64509*
#42	0.0935	2.37		1/8	2	1/2	7/16	1-1/4	64510*
3/32	0.0938	2.38	1/8-32	1/8	2	1/2	7/16	1-1/4	51273
#40	0.0980	2.49		1/8	2	9/16	1/2	1-1/4	51274
2,5 mm	0.0984			3,0	50,0	14,0	12,0	32,0	64511
#39	0.0995	2.53		1/8	2	9/16	1/2	1-1/4	51753
#38	0.1015	2.58	5-40	1/8	2	9/16	1/2	1-1/4	51754
#37	0.1040	2.64	5-44	1/8	2	9/16	1/2	1-1/4	51755
#36	0.1065	2.71	6-32	1/8	2	9/16	1/2	1-1/4	51756
7/64	0.1094	2.78		1/8	2	5/8	9/16	1-1/4	51275
#35	0.1100	2.79		1/8	2	5/8	9/16	1-1/4	51276
#34	0.1110	2.82		1/8	2	5/8	9/16	1-1/4	51277
#33	0.1130	2.87	6-40	1/8	2	5/8	9/16	1-1/4	51757
2,9 mm	0.1142			3,0	50,0	16,0	14,0	32,0	64512
#32	0.1160	2.95		1/8	2	5/8	9/16	1-1/4	51758
3,0 mm	0.1181			6,0	62,0	20,0	17,0	36,0	63155
#31	0.1200	3.05		1/8	2	5/8	9/16	1-1/4	51759
3,1 mm	0.1220			6,0	62,0	20,0	17,0	36,0	63741
1/8	0.1250	3.18		1/4	2-1/2	3/4	21/32	1-7/16	51330
3,2 mm	0.1260		M3,5 X 0,35	6,0	62,0	20,0	17,0	36,0	63156
#30	0.1285	3.26		1/4	2-1/2	3/4	21/32	1-7/16	51278
3,3 mm	0.1299		M4 X 0,7	6,0	62,0	20,0	17,0	36,0	63157
3,4 mm	0.1339			6,0	62,0	20,0	17,0	36,0	63158
#29	0.1360	3.45	8-32,8-36	1/4	2-1/2	3/4	21/32	1-7/16	51331
3,5 mm	0.1378		M4 X 0,5	6,0	62,0	20,0	17,0	36,0	63159
#28	0.1405	3.57	8-40	1/4	2-1/2	3/4	21/32	1-7/16	51760
9/64	0.1406	3.57		1/4	2-1/2	3/4	21/32	1-7/16	51332
3,6 mm	0.1417		M4 X 0,35	6,0	62,0	20,0	17,0	36,0	63160
#27	0.1440	3.66		1/4	2-1/2	3/4	21/32	1-7/16	51761
3,7 mm	0.1457		M4,5 X 0,75	6,0	62,0	20,0	17,0	36,0	63161
#26	0.1470	3.73	3/16-24	1/4	2-1/2	3/4	21/32	1-7/16	51762
#25	0.1495	3.80	10-24	1/4	2-5/8	7/8	23/32	1-7/16	51333

*Single Margin

continued on next page

- Double margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point eliminates the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 56 HRc (≤ 57 Bhn)




3xD



135 3xD

FRACTIONAL & METRIC SERIES

- Double margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point eliminates the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 56 HRC (≤ 577 Bhn)

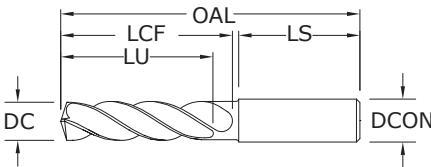

CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	TAP SIZE REFERENCE ONLY	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS	EDP NO. Ti-NAMITE-A (AITIN)	
3,8 mm	0.1496			1/4	6,0	66,0	24,0	21,0	36,0	63742
#24	0.1520	3.86	10-28	1/4	2-5/8	7/8	23/32	1-7/16	51763	
3,9 mm	0.1535			1/4	6,0	66,0	24,0	21,0	36,0	63743
#23	0.1540	3.91		1/4	2-5/8	7/8	23/32	1-7/16	51764	
5/32	0.1562	3.97		1/4	2-5/8	7/8	23/32	1-7/16	51334	
#22	0.1570	3.99	10-30	1/4	2-5/8	7/8	23/32	1-7/16	51765	
4,0 mm	0.1575		M4,5 X 0,5	1/4	6,0	66,0	24,0	21,0	36,0	63162
#21	0.1590	4.04	10-32	1/4	2-5/8	7/8	23/32	1-7/16	51335	
#20	0.1610	4.09	13/64-24	1/4	2-5/8	7/8	23/32	1-7/16	51279	
4,1 mm	0.1614			1/4	6,0	66,0	24,0	21,0	36,0	63744
4,2 mm	0.1654		M5 / M5 X 0,75	1/4	6,0	66,0	24,0	21,0	36,0	63163
#19	0.1660	4.22		1/4	2-5/8	7/8	23/32	1-7/16	51766	
4,3 mm	0.1693			1/4	6,0	66,0	24,0	21,0	36,0	63164
#18	0.1695	4.31		1/4	2-5/8	7/8	23/32	1-7/16	51767	
11/64	0.1719	4.37		1/4	2-5/8	7/8	23/32	1-7/16	51336	
#17	0.1730	4.39		1/4	2-5/8	7/8	23/32	1-7/16	51768	
4,4 mm	0.1732			1/4	6,0	66,0	24,0	21,0	36,0	63745
#16	0.1770	4.50	12-24	1/4	2-5/8	7/8	23/32	1-7/16	51769	
4,5 mm	0.1772		M5 X 0,5	1/4	6,0	66,0	24,0	21,0	36,0	63165
#15	0.1800	4.57		1/4	2-5/8	7/8	23/32	1-7/16	51770	
4,6 mm	0.1811		12-28	1/4	6,0	66,0	24,0	21,0	36,0	63166
#14	0.1820	4.62		1/4	2-5/8	7/8	23/32	1-7/16	51771	
#13	0.1850	4.70	12-32	1/4	2-5/8	7/8	23/32	1-7/16	51772	
4,7 mm	0.1850			1/4	6,0	66,0	24,0	21,0	36,0	63746
3/16	0.1875	4.76		1/4	2-5/8	1	53/64	1-7/16	51337	
#12	0.1890	4.80	7/32-32	1/4	2-5/8	1	53/64	1-7/16	51773	
4,8 mm	0.1890			1/4	6,0	66,0	28,0	24,0	36,0	63167
#11	0.1910	4.85		1/4	2-5/8	1	53/64	1-7/16	51774	
4,9 mm	0.1929			1/4	6,0	66,0	28,0	24,0	36,0	63747
#10	0.1935	4.91	14-20	1/4	2-5/8	1	53/64	1-7/16	51775	
#9	0.1960	4.98		1/4	2-5/8	1	53/64	1-7/16	51776	
5,0 mm	0.1969		M6 X 1	1/4	6,0	66,0	28,0	24,0	36,0	63168
#8	0.1990	5.05		1/4	2-5/8	1	53/64	1-7/16	51777	
5,1 mm	0.2008			1/4	6,0	66,0	28,0	24,0	36,0	63748
#7	0.2010	5.11	1/4-20	1/4	2-5/8	1	53/64	1-7/16	51338	
13/64	0.2031	5.16		1/4	2-5/8	1	53/64	1-7/16	51339	
#6	0.2040	5.18		1/4	2-5/8	1	53/64	1-7/16	51778	
5,2 mm	0.2047		M6 X 0,75	1/4	6,0	66,0	28,0	24,0	36,0	63749
#5	0.2055	5.22		1/4	2-5/8	1	53/64	1-7/16	51779	
5,25 mm	0.2067			1/4	6,0	66,0	28,0	24,0	36,0	63169
5,3 mm	0.2087			1/4	6,0	66,0	28,0	24,0	36,0	63170
#4	0.2090	5.31	1/4-24	1/4	2-5/8	1	53/64	1-7/16	51780	
5,4 mm	0.2126			1/4	6,0	66,0	28,0	24,0	36,0	63750
#3	0.2130	5.41	1/4-28	1/4	2-5/8	1	53/64	1-7/16	51340	
5,5 mm	0.2165		M6 X 0,5	1/4	6,0	66,0	28,0	24,0	36,0	63171
7/32	0.2188	5.56	1/4-32	1/4	2-5/8	1	53/64	1-7/16	51341	

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+,.00047
DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+,.00063
DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+,.00083
DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+,.00098
DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+,.00114
DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +.0022/+,.0012
DCON = h₆

>3-6 DIAMETER

DC = +.0044/+,.0016
DCON = h₆

>6-10 DIAMETER

DC = +.0066/+,.0021
DCON = h₆

>10-18 DIAMETER

DC = +.0077/+,.0025
DCON = h₆

>18-30 DIAMETER

DC = +.0088/+,.0029
DCON = h₆

STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

TITANIUM

NON-FERROUS

HARDENED STEELS

For patent information visit
www.ksptpatents.com



135 3xD

FRACTIONAL & METRIC SERIES

CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	TAP SIZE REFERENCE ONLY	inch & mm					EDP NO. Ti-NAMITE-A (AITIN)	CONTINUED
				SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS		
5,6 mm	0.2205			6,0	66,0	28,0	24,0	36,0	63751	
#2	0.2210	5.61		1/4	2-5/8	1	53/64	1-7/16	51781	
5,7 mm	0.2244			6,0	66,0	28,0	24,0	36,0	63752	
#1	0.2280	5.79		1/4	2-5/8	1	53/64	1-7/16	51782	
5,8 mm	0.2283			6,0	66,0	28,0	24,0	36,0	63172	
5,9 mm	0.2323			6,0	66,0	28,0	24,0	36,0	63753	
A	0.2340	5.94		1/4	2-5/8	1	53/64	1-7/16	51601	
15/64	0.2344	5.95		1/4	2-5/8	1	53/64	1-7/16	51342	
6,0 mm	0.2362	6.00	M7 X 1	6,0	66,0	28,0	24,0	36,0	63173	
B	0.2380	6.05		1/4	3-1/8	1-5/16	1-3/64	1-7/16	51602	
6,1 mm	0.2402			8,0	79,0	34,0	28,0	36,0	63754	
C	0.2420	6.15		1/4	3-1/8	1-5/16	1-3/64	1-7/16	51603	
6,2 mm	0.2441			8,0	79,0	34,0	28,0	36,0	63755	
D	0.2460	6.25		1/4	3-1/8	1-5/16	1-3/64	1-7/16	51604	
6,25 mm	0.2461		M7 X 0,75	8,0	79,0	34,0	28,0	36,0	63174	
6,3 mm	0.2480			8,0	79,0	34,0	28,0	36,0	63756	
1/4	0.2500	6.35		1/4	3-1/8	1-5/16	1-3/64	1-7/16	51343	
6,4 mm	0.2520			8,0	79,0	34,0	28,0	36,0	63175	
6,5 mm	0.2559			8,0	79,0	34,0	28,0	36,0	63213	
F	0.2570	6.53	5/16-18	5/16	3-1/8	1-5/16	1-3/64	1-7/16	51344	
6,6 mm	0.2598			8,0	79,0	34,0	28,0	36,0	63757	
G	0.2610	6.63		5/16	3-1/8	1-5/16	1-3/64	1-7/16	51606	
6,7 mm	0.2638			8,0	79,0	34,0	28,0	36,0	63758	
17/64	0.2656	6.75	5/16-20	5/16	3-1/8	1-5/16	1-3/64	1-7/16	51345	
H	0.2660	6.76		5/16	3-1/8	1-5/16	1-3/64	1-7/16	51607	
6,8 mm	0.2677		M8 X 1,25	8,0	79,0	34,0	28,0	36,0	63176	
6,9 mm	0.2717			8,0	79,0	34,0	28,0	36,0	63759	
I	0.2720	6.91	5/16-24	5/16	3-1/8	1-5/16	1-3/64	1-7/16	51346	
7,0 mm	0.2756		M8 X 1	8,0	79,0	34,0	28,0	36,0	63177	
J	0.2770	7.04		5/16	3-1/8	1-5/16	1-3/64	1-7/16	51608	
7,1 mm	0.2795			8,0	79,0	41,0	34,0	36,0	63760	
K	0.2810	7.14		5/16	3-1/8	1-9/16	1-3/16	1-7/16	51609	
9/32	0.2812	7.14	5/16-32	5/16	3-1/8	1-9/16	1-3/16	1-7/16	51347	
7,2 mm	0.2835			8,0	79,0	41,0	34,0	36,0	63761	
7,25 mm	0.2854		M8 X 0,75	8,0	79,0	41,0	34,0	36,0	63178	
7,3 mm	0.2874			8,0	79,0	41,0	34,0	36,0	63762	
L	0.2900	7.37		5/16	3-1/8	1-9/16	1-3/16	1-7/16	51610	
7,4 mm	0.2913			8,0	79,0	41,0	34,0	36,0	63763	
M	0.2950	7.49		5/16	3-1/8	1-9/16	1-3/16	1-7/16	51611	
7,5 mm	0.2953		M8 X 0,5	8,0	79,0	41,0	34,0	36,0	63179	
19/64	0.2969	7.54		5/16	3-1/8	1-9/16	1-3/16	1-7/16	51348	
7,6 mm	0.2992			8,0	79,0	41,0	34,0	36,0	63764	
N	0.3020	7.67		5/16	3-1/8	1-9/16	1-3/16	1-7/16	51612	
7,7 mm	0.3031			8,0	79,0	41,0	34,0	36,0	63765	
7,8 mm	0.3071		M9 X 1,25	8,0	79,0	41,0	34,0	36,0	63180	
7,9 mm	0.3110			8,0	79,0	41,0	34,0	36,0	63766	
5/16	0.3125	7.94	3/8-16	5/16	3-1/8	1-9/16	1-3/16	1-7/16	51349	
8,0 mm	0.3150		M9 x 1	8,0	79,0	41,0	34,0	36,0	63181	
O	0.3160	8.03		3/8	3-1/2	1-27/32	1-37/64	1-9/16	51613	
8,1 mm	0.3189			10,0	89,0	47,0	40,0	40,0	63767	
8,2 mm	0.3228			10,0	89,0	47,0	40,0	40,0	63768	
P	0.3230	8.20		3/8	3-1/2	1-27/32	1-37/64	1-9/16	51614	
8,3 mm	0.3268			10,0	89,0	47,0	40,0	40,0	63769	
21/64	0.3281	8.33	3/8-20	3/8	3-1/2	1-27/32	1-37/64	1-9/16	51350	
8,4 mm	0.3307			10,0	89,0	47,0	40,0	40,0	63182	
Q	0.3320	8.43	3/8-24	3/8	3-1/2	1-27/32	1-37/64	1-9/16	51351	
8,5 mm	0.3346		M10 X 1,5	10,0	89,0	47,0	40,0	40,0	63183	
8,6 mm	0.3386			10,0	89,0	47,0	40,0	40,0	63770	

continued on next page




3xD



135 3xD

FRACTIONAL & METRIC SERIES

- Double margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point eliminates the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 56 HRc (≤ 577 Bhn)

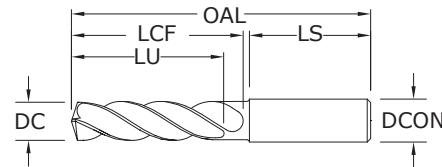

CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	TAP SIZE REFERENCE ONLY	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	Cleared Length LU	SHANK LENGTH LS	EDP NO.
									Ti-NAMITE-A (AITIN)
R	0.3390	8.61		3/8	3-1/2	1-27/32	1-37/64	1-9/16	51615
8,7 mm	0.3425			10,0	89,0	47,0	40,0	40,0	63771
11/32	0.3438	8.73	3/8-32	3/8	3-1/2	1-27/32	1-37/64	1-9/16	51352
8,8 mm	0.3465		M10 X 1,25	10,0	89,0	47,0	40,0	40,0	63184
S	0.3480	8.84		3/8	3-1/2	1-27/32	1-37/64	1-9/16	51616
8,9 mm	0.3504			10,0	89,0	47,0	40,0	40,0	63772
9,0 mm	0.3543		M10 X 1	10,0	89,0	47,0	40,0	40,0	63185
T	0.3580	9.09		3/8	3-1/2	1-27/32	1-37/64	1-9/16	51617
9,1 mm	0.3583			10,0	89,0	47,0	40,0	40,0	63773
23/64	0.3594	9.13		3/8	3-1/2	1-27/32	1-37/64	1-9/16	51353
9,2 mm	0.3622		M10 X 0,75	10,0	89,0	47,0	40,0	40,0	63774
9,25 mm	0.3642	9.25		10,0	89,0	47,0	40,0	40,0	63186
9,3 mm	0.3661			10,0	89,0	47,0	40,0	40,0	63775
U	0.3680	9.35	7/16-14	3/8	3-1/2	1-27/32	1-37/64	1-9/16	51354
9,4 mm	0.3701			10,0	89,0	47,0	40,0	40,0	63776
9,5 mm	0.3740		M10 X 0,5	10,0	89,0	47,0	40,0	40,0	63187
3/8	0.3750	9.53		3/8	3-1/2	1-27/32	1-37/64	1-9/16	51355
V	0.3770	9.58		1/2	3-1/2	1-27/32	1-37/64	1-9/16	51618
9,6 mm	0.3780			10,0	89,0	47,0	40,0	40,0	63777
9,7 mm	0.3819			10,0	89,0	47,0	40,0	40,0	63778
9,8 mm	0.3858			10,0	89,0	47,0	40,0	40,0	63779
W	0.3860			1/2	3-1/2	1-27/32	1-37/64	1-9/16	51619
9,9 mm	0.3898			10,0	89,0	47,0	40,0	40,0	63780
25/64	0.3906	9.92	7/16-20	1/2	3-1/2	1-27/32	1-37/64	1-9/16	51356
10,0 mm	0.3937			10,0	89,0	47,0	40,0	40,0	63188
X	0.3970	10.08	7/16-24	1/2	4-1/16	2-3/16	1-51/64	1-49/64	51620
10,1 mm	0.3976			12,0	102,0	55,0	45,0	45,0	63781
10,2 mm	0.4016		M12 X 1,75	12,0	102,0	55,0	45,0	45,0	63189
Y	0.4040	10.26	7/16-28	1/2	4-1/16	2-3/16	1-51/64	1-49/64	51621
10,3 mm	0.4055			12,0	102,0	55,0	45,0	45,0	63782
13/32	0.4062	10.32		1/2	4-1/16	2-3/16	1-51/64	1-49/64	51357
10,4 mm	0.4094			12,0	102,0	55,0	45,0	45,0	63783
Z	0.4130	10.49		1/2	4-1/16	2-3/16	1-51/64	1-49/64	51622
10,5 mm	0.4134		M12 X 1,5	12,0	102,0	55,0	45,0	45,0	63190
10,6 mm	0.4173			12,0	102,0	55,0	45,0	45,0	63784
10,7 mm	0.4213			12,0	102,0	55,0	45,0	45,0	63785
27/64	0.4219	10.72	1/2-13	1/2	4-1/16	2-3/16	1-51/64	1-49/64	51358
10,8 mm	0.4252		M12 X 1,25	12,0	102,0	55,0	45,0	45,0	63191
10,9 mm	0.4291			12,0	102,0	55,0	45,0	45,0	63786
11,0 mm	0.4331		M12 X 1	12,0	102,0	55,0	45,0	45,0	63192
11,1 mm	0.4370			12,0	102,0	55,0	45,0	45,0	63787
7/16	0.4375	11.11	1/4-18 NPT	1/2	4-1/16	2-3/16	1-51/64	1-49/64	51359
11,2 mm	0.4409			12,0	102,0	55,0	45,0	45,0	63788
11,25 mm	0.4429			12,0	102,0	55,0	45,0	45,0	63193
11,3 mm	0.4449			12,0	102,0	55,0	45,0	45,0	63789

continued on next page

For patent information visit www.ksptpatents.com

- STEELS
- STAINLESS STEELS
- CAST IRON
- HIGH TEMP ALLOYS
- TITANIUM
- NON-FERROUS
- HARDENED STEELS



135 3xD

FRACTIONAL & METRIC SERIES

CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	TAP SIZE REFERENCE ONLY	inch & mm					EDP NO. Ti-NAMITE-A (AITIN)	CONTINUED
				SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS		
11,4 mm	0.4488			12,0	102,0	55,0	45,0	45,0	63790	
11,5 mm	0.4528		M12 X 0,5	12,0	102,0	55,0	45,0	45,0	63194	
29/64	0.4531	11.51	1/2-20	1/2	4-1/16	2-3/16	1-51/64	1-49/64	51360	
11,6 mm	0.4567			12,0	102,0	55,0	45,0	45,0	63791	
11,7 mm	0.4606			12,0	102,0	55,0	45,0	45,0	63792	
11,8 mm	0.4646			12,0	102,0	55,0	45,0	45,0	63793	
11,9 mm	0.4685			12,0	102,0	55,0	45,0	45,0	63794	
15/32	0.4688	11.91	1/2-28	1/2	4-1/16	2-3/16	1-51/64	1-49/64	51361	
12,0 mm	0.4724		M14 X 2	12,0	102,0	55,0	45,0	45,0	63195	
31/64	0.4844	12.30	9/16-12	1/2	4-1/4	2-5/16	1-7/8	1-49/64	51362	
12,5 mm	0.4921		M14 X 1,5	14,0	107,0	60,0	49,0	45,0	63196	
1/2	0.5000	12.70		1/2	4-1/4	2-5/16	1-7/8	1-49/64	51363	
12,8 mm	0.5039		M14 X 1,25	14,0	107,0	60,0	49,0	45,0	63197	
13,0 mm	0.5118		M14 X 1	14,0	107,0	60,0	49,0	45,0	63198	
33/64	0.5156	13.10	9/16-18	5/8	4-1/4	2-5/16	1-7/8	1-49/64	51364	
17/32	0.5312	13.49	5/8-11	5/8	4-1/4	2-5/16	1-7/8	1-49/64	51365	
13,5 mm	0.5315			14,0	107,0	60,0	49,0	45,0	63199	
35/64	0.5469	13.89	5/8-12	5/8	4-1/4	2-5/16	1-7/8	1-49/64	51783	
14,0 mm	0.5512		M16 X 2	14,0	107,0	60,0	49,0	45,0	63200	
9/16	0.5625	14.29		5/8	4-9/16	2-1/2	2	1-57/64	51366	
14,5 mm	0.5709		M16 X 1,5	16,0	115,0	65,0	51,0	48,0	63201	
37/64	0.5781	14.68	5/8-18	5/8	4-9/16	2-1/2	2	1-57/64	51367	
15,0 mm	0.5906		M16 X 1	16,0	115,0	65,0	51,0	48,0	63202	
19/32	0.5938	15.08	11/16-11	5/8	4-9/16	2-1/2	2	1-57/64	51784	
39/64	0.6094	15.48	11/16-12	5/8	4-9/16	2-1/2	2	1-57/64	51785	
15,5 mm	0.6102		M18 X 2,5	16,0	115,0	65,0	51,0	48,0	63203	
5/8	0.6250	15.88	11/16-16	5/8	4-9/16	2-1/2	2	1-57/64	51368	
16,0 mm	0.6299			16,0	115,0	65,0	51,0	48,0	63204	
41/64	0.6406	16.27	11/16-24	3/4	4-7/8	2-3/4	2-5/16	1-57/64	51786	
16,5 mm	0.6496		M18 X 1,5	18,0	123,0	73,0	58,0	48,0	63205	
21/32	0.6562	16.67	3/4-10	3/4	4-7/8	2-3/4	2-5/16	1-57/64	51369	
17,0 mm	0.6693			18,0	123,0	73,0	58,0	48,0	63206	
43/64	0.6719	17.07	3/4-12	3/4	4-7/8	2-3/4	2-5/16	1-57/64	51787	
11/16	0.6875	17.46	3/4-16	3/4	4-7/8	2-3/4	2-5/16	1-57/64	51370	
17,5 mm	0.6890		M20 X 2,5	18,0	123,0	73,0	58,0	48,0	63207	
45/64	0.7031	17.86	3/4-20, 1/2-14 NPT	3/4	4-7/8	2-3/4	2-5/16	1-57/64	51788	
18,0 mm	0.7087			18,0	123,0	73,0	58,0	48,0	63208	
23/32	0.7188	18.26		3/4	4-7/8	2-3/4	2-5/16	1-57/64	51789	
18,5 mm	0.7283		M20 X 1,5	20,0	131,0	79,0	63,0	50,0	63209	
47/64	0.7344	18.65	13/16-12	3/4	4-7/8	2-3/4	2-5/16	1-57/64	51790	
19,0 mm	0.7480			20,0	131,0	79,0	63,0	50,0	63210	
3/4	0.7500	19.05	13/16-16	3/4	5-1/4	3-1/16	2-7/16	1-31/32	51371	
49/64	0.7656	19.45	7/8-9	7/8	5-1/4	3-1/16	2-7/16	1-31/32	51372	
19,5 mm	0.7677		M22 X 2,5	20,0	131,0	79,0	63,0	50,0	63211	
25/32	0.7812	19.84		7/8	6	3-11/16	2-11/16	2-1/8	51791	
20,0 mm	0.7874			20,0	131,0	79,0	63,0	50,0	63212	
51/64	0.7969	20.24	7/8-12	7/8	6	3-11/16	2-11/16	2-1/8	51792	
20,5 mm	0.8071			22,0	150,0	93,0	73,0	53,0	64513	
13/16	0.8125	20.64	7/8-14	7/8	6	3-11/16	2-11/16	2-1/8	51373	
21,0 mm	0.8268			22,0	150,0	93,0	73,0	53,0	64514	
22,0 mm	0.8661			22,0	150,0	93,0	73,0	53,0	64515	
7/8	0.8750	22.23	15/16-16, 1-8	7/8	6	3-11/16	2-11/16	2-1/8	51374	
59/64	0.9219	23.42	1-12	1	6	3-11/16	2-11/16	2-1/8	51375	

FRACTIONAL

Hi-PerCarb®

Series 135 3D Fractional		Hardness	Vc (sfm)	DC • in							
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536			1/32	1/8	1/4	3/8	1/2	5/8	7/8	
	≤ 175 Bhn or ≤ 7 HRc	385 (308-462)	RPM	47062	11766	5883	3922	2941	2353	1681	
			Fr	0.0010	0.0038	0.0076	0.0115	0.0153	0.0191	0.0268	
	≤ 275 Bhn or ≤ 28 HRc	350 (280-420)	RPM	42784	10696	5348	3565	2674	2139	1528	
			Fr	0.0009	0.0036	0.0071	0.0107	0.0142	0.0178	0.0249	
	≤ 425 Bhn or ≤ 45 HRc	200 (160-240)	RPM	24448	6112	3056	2037	1528	1222	873	
			Fr	0.0007	0.0029	0.0059	0.0088	0.0118	0.0147	0.0206	
	≤ 275 Bhn or ≤ 28 HRc	300 (240-360)	RPM	36672	9168	4584	3056	2292	1834	1310	
			Fr	0.0007	0.0029	0.0059	0.0088	0.0118	0.0147	0.0206	
M	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	185 (148-222)	RPM	22614	5654	2827	1885	1413	1131	808
				Fr	0.0006	0.0026	0.0051	0.0077	0.0103	0.0128	0.0180
		≤ 450 Bhn or ≤ 48 HRc	130 (104-156)	RPM	15891	3973	1986	1324	993	795	568
				Fr	0.0004	0.0018	0.0035	0.0053	0.0070	0.0088	0.0123
				Feed (ipm)	7.0	7.0	7.0	7.0	7.0	7.0	7.0
		≤ 185 Bhn or ≤ 9 HRc	275 (220-330)	RPM	33616	8404	4202	2801	2101	1681	1201
				Fr	0.0006	0.0026	0.0051	0.0077	0.0102	0.0128	0.0179
		≤ 275 Bhn or ≤ 28 HRc	170 (136-204)	RPM	20781	5195	2598	1732	1299	1039	742
				Fr	0.0005	0.0020	0.0040	0.0061	0.0081	0.0101	0.0141
		≤ 275 Bhn or ≤ 28 HRc	90 (72-108)	RPM	11002	2750	1375	917	688	550	393
				Fr	0.0005	0.0020	0.0040	0.0060	0.0080	0.0100	0.0140
		≤ 375 Bhn or ≤ 40 HRc	65 (52-78)	RPM	7946	1986	993	662	497	397	284
				Fr	0.0004	0.0018	0.0035	0.0053	0.0070	0.0088	0.0123
				Feed (ipm)	3.5	3.5	3.5	3.5	3.5	3.5	3.5
K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	320 (256-384)	RPM	39117	9779	4890	3260	2445	1956	1397
				Fr	0.0012	0.0046	0.0092	0.0138	0.0184	0.0230	0.0322
		≤ 260 Bhn or ≤ 26 HRc	285 (228-342)	RPM	34838	8710	4355	2903	2177	1742	1244
				Fr	0.0011	0.0046	0.0092	0.0138	0.0184	0.0230	0.0321
				Feed (ipm)	40.0	40.0	40.0	40.0	40.0	40.0	40.0

continued on next page

Series 135 3D Fractional		Hardness	Vc (sfm)	DC • in						
				1/32	1/8	1/4	3/8	1/2	5/8	7/8
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80 Bhn or ≤ 47 HRb (560-840)	700 Fr Feed (ipm)	85568 105.0	21392 105.0	10696 105.0	7131 105.0	5348 105.0	4278 105.0	3056 0.0344
		≤ 150 Bhn or ≤ 7 HRc (480-720)	600 Fr Feed (ipm)	73344 91.0	18336 91.0	9168 91.0	6112 91.0	4584 91.0	3667 91.0	2619 0.0347
		≤ 140 Bhn or ≤ 3 HRc (400-600)	500 Fr Feed (ipm)	61120 30.0	15280 30.0	7640 30.0	5093 30.0	3820 30.0	3056 30.0	2183 0.0137
		≤ 200 Bhn or ≤ 23 HRc (320-480)	400 Fr Feed (ipm)	48896 24.5	12224 24.5	6112 24.5	4075 24.5	3056 24.5	2445 24.5	1746 0.0140
S	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 300 Bhn or ≤ 32 HRc (44-66)	55 Fr Feed (ipm)	6723 1.3	1681 1.3	840 1.3	560 1.3	420 1.3	336 1.3	240 0.0054
		≤ 400 Bhn or ≤ 43 HRc (24-36)	30 Fr Feed (ipm)	3667 0.6	917 0.6	458 0.6	306 0.6	229 0.6	183 0.6	131 0.0046
		≤ 275 Bhn or ≤ 28 HRc (108-162)	135 Fr Feed (ipm)	16502 7.3	4126 7.3	2063 7.3	1375 7.3	1031 7.3	825 7.3	589 7.3
		≤ 350 Bhn or ≤ 38 HRc (80-120)	100 Fr Feed (ipm)	12224 5.0	3056 5.0	1528 5.0	1019 5.0	764 5.0	611 5.0	437 5.0
H	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 440 Bhn or ≤ 47 HRc (44-66)	55 Fr Feed (ipm)	6723 2.0	1681 2.0	840 2.0	560 2.0	420 2.0	336 2.0	240 0.0083
		≤ 200 Bhn or ≤ 13 HRc (104-156)	130 Fr Feed (ipm)	15891 10.5	3973 10.5	1986 10.5	1324 10.5	993 10.5	795 10.5	568 10.5
		≤ 375 Bhn or ≤ 40 HRc (72-108)	90 Fr Feed (ipm)	11002 3.2	2750 3.2	1375 3.2	917 3.2	688 3.2	550 3.2	393 3.2
		≤ 475 Bhn or ≤ 50 HRc (60-90)	75 Fr Feed (ipm)	9168 1.8	2292 1.8	1146 1.8	764 1.8	573 1.8	458 1.8	327 1.8

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = Vc x 3.82 / DC

ipm = Fr x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Hi-PerCarb®

Series 135 3D Metric		Hardness	Vc (m/min)	DC • mm								
				1.5	3	6	8	10	12	16	20	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc	117 (94-141)	RPM	24882	12441	6220	4665	3732	3110	2333	1866
				Fr	0.047	0.094	0.189	0.252	0.315	0.378	0.504	0.630
				Feed (mm/min)	1175	1175	1175	1175	1175	1175	1175	1175
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275 Bhn or ≤ 28 HRc	107 (85-128)	RPM	22620	11310	5655	4241	3393	2827	2121	1696
				Fr	0.043	0.086	0.172	0.229	0.286	0.343	0.457	0.572
				Feed (mm/min)	970	970	970	970	970	970	970	970
	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 475 Bhn or ≤ 45 HRc	61 (49-73)	RPM	12926	6463	3231	2424	1939	1616	1212	969
				Fr	0.036	0.071	0.142	0.190	0.237	0.285	0.380	0.475
				Feed (mm/min)	460	460	460	460	460	460	460	460
M	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc	91 (73-110)	RPM	19388	9694	4847	3635	2908	2424	1818	1454
				Fr	0.036	0.071	0.142	0.190	0.237	0.285	0.380	0.475
				Feed (mm/min)	690	690	690	690	690	690	690	690
	CAST IRONS Gray, Malleable, Ductile	≤ 375 Bhn or ≤ 40 HRc	56 (45-68)	RPM	11956	5978	2989	2242	1793	1495	1121	897
				Fr	0.031	0.061	0.122	0.163	0.204	0.244	0.326	0.407
				Feed (mm/min)	365	365	365	365	365	365	365	365
	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 450 Bhn or ≤ 48 HRc	40 (32-48)	RPM	8402	4201	2100	1575	1260	1050	788	630
				Fr	0.021	0.042	0.083	0.111	0.139	0.167	0.222	0.278
				Feed (mm/min)	175	175	175	175	175	175	175	175
K	CAST IRONS Gray, Malleable, Ductile	≤ 185 Bhn or ≤ 9 HRc	84 (67-101)	RPM	17773	8886	4443	3332	2666	2222	1666	1333
				Fr	0.031	0.061	0.123	0.164	0.204	0.245	0.327	0.409
				Feed (mm/min)	545	545	545	545	545	545	545	545
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc	52 (41-62)	RPM	10987	5493	2747	2060	1648	1373	1030	824
				Fr	0.024	0.047	0.095	0.126	0.158	0.189	0.252	0.316
				Feed (mm/min)	260	260	260	260	260	260	260	260
	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	27 (22-33)	RPM	5816	2908	1454	1091	872	727	545	436
				Fr	0.023	0.046	0.093	0.124	0.155	0.186	0.248	0.309
				Feed (mm/min)	135	135	135	135	135	135	135	135
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 375 Bhn or ≤ 40 HRc	20 (16-24)	RPM	4201	2100	1050	788	630	525	394	315
				Fr	0.020	0.040	0.081	0.108	0.135	0.162	0.216	0.270
				Feed (mm/min)	85	85	85	85	85	85	85	85

continued on next page

Series 135 3D Metric		Hardness	Vc (m/min)	DC • mm								
				1.5	3	6	8	10	12	16	20	
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80 Bhn or ≤ 47 HRb	213 (171-256)	RPM Fr Feed (mm/min)	45239 0.059 2690	22620 0.119 2690	11310 0.238 2690	8482 0.317 2690	6786 0.396 2690	5655 0.476 2690	4241 0.634 2690	3393 0.793 2690
		≤ 150 Bhn or ≤ 7 HRc	183 (146-219)	RPM Fr Feed (mm/min)	38777 0.060 2325	19388 0.120 2325	9694 0.240 2325	7271 0.320 2325	5816 0.400 2325	4847 0.480 2325	3635 0.640 2325	2908 0.799 2325
		≤ 140 Bhn or ≤ 3 HRc	152 (122-183)	RPM Fr Feed (mm/min)	32314 0.024 776	16157 0.048 776	8078 0.096 776	6059 0.128 776	4847 0.160 776	4039 0.192 776	3029 0.256 776	2424 0.320 776
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 200 Bhn or ≤ 23 HRc	122 (98-146)	RPM Fr Feed (mm/min)	25851 0.024 630	12926 0.049 630	6463 0.097 630	4847 0.130 630	3878 0.162 630	3231 0.195 630	2424 0.260 630	1939 0.325 630
		≤ 300 Bhn or ≤ 32 HRc	17 (13-20)	RPM Fr Feed (mm/min)	3555 0.010 35	1777 0.020 35	889 0.039 35	666 0.053 35	533 0.066 35	444 0.079 35	333 0.105 35	267 0.131 35
		≤ 400 Bhn or ≤ 43 HRc	9 (7-11)	RPM Fr Feed (mm/min)	1939 0.008 15	969 0.015 15	485 0.031 15	364 0.041 15	291 0.052 15	242 0.062 15	182 0.083 15	145 0.103 15
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400, Rene, Waspaloy	≤ 275 Bhn or ≤ 28 HRc	41 (33-49)	RPM Fr Feed (mm/min)	8725 0.021 185	4362 0.042 185	2181 0.085 185	1636 0.113 185	1309 0.141 185	1091 0.170 185	818 0.226 185	654 0.283 185
		≤ 350 Bhn or ≤ 38 HRc	30 (24-37)	RPM Fr Feed (mm/min)	6463 0.019 125	3231 0.039 125	1616 0.077 125	1212 0.103 125	969 0.129 125	808 0.155 125	606 0.206 125	485 0.258 125
		≤ 440 Bhn or ≤ 47 HRc	17 (13-20)	RPM Fr Feed (mm/min)	3555 0.014 50	1777 0.028 50	889 0.056 50	666 0.075 50	533 0.094 50	444 0.113 50	333 0.150 50	267 0.188 50
		≤ 200 Bhn or ≤ 13 HRc	40 (32-48)	RPM Fr Feed (mm/min)	8402 0.032 265	4201 0.063 265	2100 0.126 265	1575 0.168 265	1260 0.210 265	1050 0.252 265	788 0.336 265	630 0.421 265
		≤ 375 Bhn or ≤ 40 HRc	27 (22-33)	RPM Fr Feed (mm/min)	5816 0.014 80	2908 0.028 80	1454 0.055 80	1091 0.073 80	872 0.092 80	727 0.110 80	545 0.147 80	436 0.183 80
		≤ 475 Bhn or ≤ 50 HRc	23 (18-27)	RPM Fr Feed (mm/min)	4847 0.009 45	2424 0.019 45	1212 0.037 45	909 0.050 45	727 0.062 45	606 0.074 45	454 0.099 45	364 0.124 45

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = (Vc x 1000) / (DC x 3.14)


mm/min = Fr x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



5xD

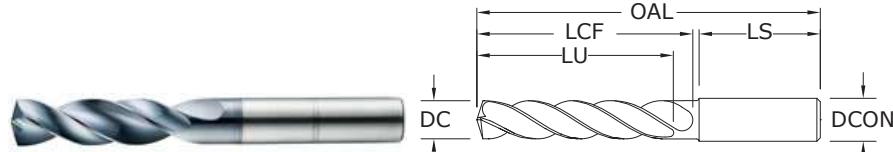

135 5xD

FRACTIONAL & METRIC SERIES

- Double margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point eliminates the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 56 HRc (≤ 577 Bhn)

inch & mm									EDP NO.
CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	TAP SIZE REFERENCE ONLY	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS	Ti-NAMITE-A (AITIN)
1/64	0.0156	0.40		1/8	1 1/2	5/32	7/64	1	52300*
1/32	0.0312	0.79		1/8	1 1/2	5/16	7/32	1	52301*
3/64	0.0469	1.19	1/16-64	1/8	1 1/2	25/64	19/64	1	52302*
1,25 mm	0.0492			3,0	38,0	10,0	7,5	25,0	64520*
1,45 mm	0.0571			3,0	38,0	10,0	7,5	25,0	64521*
#53	0.0595	1.51		1/8	1-1/2	25/64	19/64	1	64522*
1/16	0.0625	1.59	5/64-60	1/8	2	15/32	23/64	1-1/4	52303*
1,6 mm	0.0630			3,0	50,0	12,0	9,0	32,0	64523*
1,75 mm	0.0689			3,0	50,0	12,0	9,0	32,0	64524*
#50	0.0700	1.78		1/8	2	15/32	23/64	1-1/4	64525*
5/64	0.0781	1.98		1/8	2	35/64	27/64	1-1/4	52304*
#47	0.0785	1.99		1/8	2	35/64	27/64	1-1/4	64526*
2,05 mm	0.0807			3,0	50,0	14,0	11,0	32,0	64527*
#46	0.0810	2.06		1/8	2	35/64	27/64	1-1/4	64528*
#43	0.0890	2.26		1/8	2	19/32	15/32	1-1/4	64529*
#42	0.0935	2.37		1/8	2	5/8	1/2	1-1/4	64530*
3/32	0.0938	2.38	1/8-32	1/8	2	5/8	1/2	1-1/4	52305
#40	0.0980	2.49		1/8	2	43/64	17/32	1-1/4	52306
2,5 mm	0.0984			3,0	50,0	17,0	13,0	32,0	64531
#39	0.0995	2.53		1/8	2	43/64	17/32	1-1/4	52307
#38	0.1015	2.58	5-40	1/8	2	43/64	17/32	1-1/4	52308
#37	0.1040	2.64	5-44	1/8	2	45/64	9/16	1-1/4	52309
#36	0.1065	2.71	6-32	1/8	2	45/64	9/16	1-1/4	52310
7/64	0.1094	2.78		1/8	2	3/4	19/32	1-1/4	52311
#35	0.1100	2.79		1/8	2	3/4	19/32	1-1/4	52312
#34	0.1110	2.82		1/8	2	3/4	19/32	1-1/4	52313
#33	0.1130	2.87	6-40	1/8	2	3/4	19/32	1-1/4	52314
2,9 mm	0.1142			3,0	50,0	19,0	15,0	32,0	64532
#32	0.1160	2.95		1/8	2	3/4	39/64	1-1/4	52315
3,0 mm	0.1181			6,0	66,0	28,0	23,0	36,0	64100
#31	0.1200	3.05		1/8	2	3/4	39/64	1-1/4	52316
3,1 mm	0.1220			6,0	66,0	28,0	23,0	36,0	64101
1/8	0.1250	3.18		1/4	3	1	53/64	1-7/16	51580
3,2 mm	0.1260		M3,5 X 0,35	6,0	66,0	28,0	23,0	36,0	64102
#30	0.1285	3.26		1/4	3	1	53/64	1-7/16	51581
3,3 mm	0.1299		M4 X 0,7	6,0	66,0	28,0	23,0	36,0	64103
3,4 mm	0.1339		8-32,8-36	6,0	66,0	28,0	23,0	36,0	64104
#29	0.1360	3.45		1/4	3	1	53/64	1-7/16	51582

*Single Margin

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+,.00047
DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+,.00063
DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+,.00083
DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+,.00098
DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+,.00114
DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +.0022/+0,012
DCON = h₆

>3-6 DIAMETER

DC = +.0044/+0,016
DCON = h₆

>6-10 DIAMETER

DC = +.0066/+0,021
DCON = h₆

>10-18 DIAMETER

DC = +.0077/+0,025
DCON = h₆

>18-30 DIAMETER

DC = +.0088/+0,029
DCON = h₆

STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

TITANIUM

NON-FERROUS

HARDENED STEELS

For patent information visit www.ksptpatents.com



135 5xD


FRACTIONAL & METRIC SERIES

CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	inch & mm						EDP NO.	Ti-NAMITE-A (AITIN)	CONTINUED
			TAP SIZE REFERENCE ONLY	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS			
3,5 mm	0.1378			6,0	66,0	28,0	23,0	36,0	64105		
#28	0.1405	3.57	8-40	1/4	3	1	53/64	1-7/16	52317		
9/64	0.1406	3.57		1/4	3	1	53/64	1-7/16	51583		
3,6 mm	0.1417		M4 X 0,35	6,0	66,0	28,0	23,0	36,0	64106		
#27	0.1440	3.66		1/4	3	1	53/64	1-7/16	52318		
3,7 mm	0.1457		M4.5 X 0,75	6,0	66,0	28,0	23,0	36,0	64107		
#26	0.1470	3.73	3/16-24	1/4	3	1	53/64	1-7/16	52319		
#25	0.1495	3.80	10-24	1/4	3-1/4	1-1/4	1-5/64	1-7/16	51584		
3,8 mm	0.1496			6,0	74,0	36,0	29,0	36,0	64108		
#24	0.1520	3.86	10-28	1/4	3-1/4	1-1/4	1-5/64	1-7/16	52321		
3,9 mm	0.1535			6,0	74,0	36,0	29,0	36,0	64109		
#23	0.1540	3.91		1/4	3-1/4	1-1/4	1-5/64	1-7/16	52322		
5/32	0.1562	3.97		1/4	3-1/4	1-1/4	1-5/64	1-7/16	51585		
#22	0.1570	3.99	10-30	1/4	3-1/4	1-1/4	1-5/64	1-7/16	52323		
4,0 mm	0.1575		M4,5 X 0,5	6,0	74,0	36,0	29,0	36,0	64110		
#21	0.1590	4.04	10-32	1/4	3-1/4	1-1/4	1-5/64	1-7/16	51586		
#20	0.1610	4.09	13/64-24	1/4	3-1/4	1-1/4	1-5/64	1-7/16	51587		
4,1 mm	0.1614			6,0	74,0	36,0	29,0	36,0	64111		
4,2 mm	0.1654		M5 / M5 X 0,75	6,0	74,0	36,0	29,0	36,0	64112		
#19	0.1660	4.22		1/4	3-1/4	1-1/4	1-5/64	1-7/16	52324		
4,3 mm	0.1693			6,0	74,0	36,0	29,0	36,0	64113		
#18	0.1695	4.31		1/4	3-1/4	1-1/4	1-5/64	1-7/16	52325		
11/64	0.1719	4.37		1/4	3-1/4	1-1/4	1-5/64	1-7/16	51588		
#17	0.1730	4.39		1/4	3-1/4	1-1/4	1-5/64	1-7/16	52326		
4,4 mm	0.1732			6,0	74,0	36,0	29,0	36,0	64114		
4,5 mm	0.1772		M5 X 0,5	6,0	74,0	36,0	29,0	36,0	64115		
#15	0.1800	4.57		1/4	3-1/4	1-1/4	1-5/64	1-7/16	52327		
4,6 mm	0.1811		12-28	6,0	74,0	36,0	29,0	36,0	64116		
#14	0.1820	4.62		1/4	3-1/4	1-1/4	1-5/64	1-7/16	52328		
#13	0.1850	4.70	12-32	1/4	3-1/4	1-1/4	1-5/64	1-7/16	52329		
4,7 mm	0.1850			6,0	74,0	36,0	29,0	36,0	64117		
3/16	0.1875	4.76		1/4	3-1/4	1-3/4	1-37/64	1-7/16	51589		
#12	0.1890	4.80	7/32-32	1/4	3-1/4	1-3/4	1-37/64	1-7/16	52330		
4,8 mm	0.1890			6,0	82,0	44,0	35,0	36,0	64118		
4,9 mm	0.1929			6,0	82,0	44,0	35,0	36,0	64119		
#10	0.1935	4.91	14-20	1/4	3-1/4	1-3/4	1-37/64	1-7/16	52331		
#9	0.1960	4.98		1/4	3-1/4	1-3/4	1-37/64	1-7/16	52332		
5,0 mm	0.1969		M6 X 1	6,0	82,0	44,0	35,0	36,0	64120		
#8	0.1990	5.05		1/4	3-1/4	1-3/4	1-37/64	1-7/16	52333		
5,1 mm	0.2008			6,0	82,0	44,0	35,0	36,0	64121		
#7	0.2010	5.11	1/4-20	1/4	3-1/4	1-3/4	1-37/64	1-7/16	51506		
13/64	0.2031	5.16		1/4	3-1/4	1-3/4	1-37/64	1-7/16	51507		
#6	0.2040	5.18		1/4	3 1/4	1 3/4	1 37/64	1 7/16	52334		
5,2 mm	0.2047		M6 X 0,75	6,0	82,0	44,0	35,0	36,0	64122		
#5	0.2055	5.22		1/4	3-1/4	1-3/4	1-37/64	1-7/16	51590		
5,25 mm	0.2067			6,0	82,0	44,0	35,0	36,0	64123		
5,3 mm	0.2087			6,0	82,0	44,0	35,0	36,0	64124		
#4	0.2090	5.31	1/4-24	1/4	3-1/4	1-3/4	1-37/64	1-7/16	51508		

continued on next page



5xD

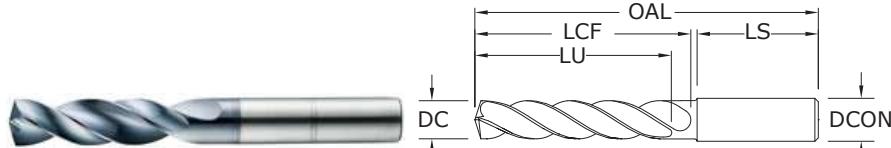**135 5xD**

FRACTIONAL & METRIC SERIES

- Double margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point eliminates the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 56 HRC (≤ 577 Bhn)

CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	TAP SIZE REFERENCE ONLY	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS	EDP NO.
									Ti-NAMITE-A (AITIN)
5,4 mm	0.2126			6,0	82,0	44,0	35,0	36,0	64125
#3	0.2130	5.41	1/4-28	1/4	3-1/4	1-3/4	1-37/64	1-7/16	51509
5,5 mm	0.2165		M6 X 0,5	6,0	82,0	44,0	35,0	36,0	64126
7/32	0.2188	5.56	1/4-32	1/4	3-1/4	1-3/4	1-37/64	1-7/16	51510
5,6 mm	0.2205			6,0	82,0	44,0	35,0	36,0	64127
#2	0.2210	5.61		1/4	3-1/4	1-3/4	1-37/64	1-7/16	52335
5,7 mm	0.2244			6,0	82,0	44,0	35,0	36,0	64128
#1	0.2280	5.79		1/4	3-1/4	1-3/4	1-37/64	1-7/16	52336
5,8 mm	0.2283			6,0	82,0	44,0	35,0	36,0	64129
5,9 mm	0.2323			6,0	82,0	44,0	35,0	36,0	64130
A	0.2340	5.94		1/4	3-1/4	1-3/4	1-37/64	1-7/16	52337
15/64	0.2344	5.95		1/4	3-1/4	1-3/4	1-37/64	1-7/16	51591
6,0 mm	0.2362		M7 X 1	6,0	82,0	44,0	35,0	36,0	64131
B	0.2380	6.05		1/4	3 5/8	2-5/64	1-51/64	1-7/16	52338
6,1 mm	0.2402			8,0	91,0	53,0	43,0	36,0	64132
C	0.2420	6.15		1/4	3 5/8	2-5/64	1-51/64	1-7/16	52339
6,2 mm	0.2441			8,0	91,0	53,0	43,0	36,0	64133
D	0.2460	6.25		1/4	3 5/8	2-5/64	1-51/64	1-7/16	52340
6,25 mm	0.2461		M7 X 0,75	8,0	91,0	53,0	43,0	36,0	64134
6,3 mm	0.2480			8,0	91,0	53,0	43,0	36,0	64135
1/4	0.2500	6.35		1/4	3-5/8	2-5/64	1-51/64	1-7/16	51511
6,4 mm	0.2520			8,0	91,0	53,0	43,0	36,0	64136
6,5 mm	0.2559			8,0	91,0	53,0	43,0	36,0	64137
F	0.2570	6.53	5/16-18	5/16	3-5/8	2-5/64	1-51/64	1-7/16	51512
6,6 mm	0.2598			8,0	91,0	53,0	43,0	36,0	64138
G	0.2610	6.63		5/16	3 5/8	2 5/64	1 51/64	1 7/16	52341
6,7 mm	0.2638			8,0	91,0	53,0	43,0	36,0	64139
17/64	0.2656	6.75	5/16-20	5/16	3-5/8	2-5/64	1-51/64	1-7/16	51513
H	0.2660	6.76		5/16	3-5/8	2-5/64	1-51/64	1-7/16	52342
6,8 mm	0.2677		M8 X 1,25	8,0	91,0	53,0	43,0	36,0	64140
6,9 mm	0.2717			8,0	91,0	53,0	43,0	36,0	64141
I	0.2720	6.91	5/16-24	5/16	3-5/8	2-5/64	1-51/64	1-7/16	51514
7,0 mm	0.2756		M8 X 1	8,0	91,0	53,0	43,0	36,0	64142
J	0.2770	7.04		5/16	3 5/8	2-5/64	1-51/64	1-7/16	52343
7,1 mm	0.2795			8,0	91,0	53,0	43,0	36,0	64143
K	0.2810	7.14		5/16	3 5/8	2-5/64	1-51/64	1-7/16	52344
9/32	0.2812	7.14	5/16-32	5/16	3-5/8	2-5/64	1-51/64	1-7/16	51515
7,2 mm	0.2835			8,0	91,0	53,0	43,0	36,0	64144

continued on next page

TOLERANCES (inch)**≤.1181 DIAMETER**DC = +.00008/+,.00047
DCON = h₆**>.1181-.2362 DIAMETER**DC = +.00016/+,.00063
DCON = h₆**>.2362-.3937 DIAMETER**DC = +.00024/+,.00083
DCON = h₆**>.3937-.7087 DIAMETER**DC = +.00028/+,.00098
DCON = h₆**>.7087-.11811 DIAMETER**DC = +.00031/+,.00114
DCON = h₆**TOLERANCES (mm)****≤3 DIAMETER**DC = +.0022/+0,012
DCON = h₆**>3-6 DIAMETER**DC = +.0044/+0,016
DCON = h₆**>6-10 DIAMETER**DC = +.0066/+0,021
DCON = h₆**>10-18 DIAMETER**DC = +.0077/+0,025
DCON = h₆**>18-30 DIAMETER**DC = +.0088/+0,029
DCON = h₆**STEELS****STAINLESS STEELS****CAST IRON****HIGH TEMP ALLOYS****TITANIUM****NON-FERROUS****HARDENED STEELS**For patent information visit
www.ksptpatents.com





135 5xD

FRACTIONAL & METRIC SERIES

CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	inch & mm						EDP NO. Ti-NAMITE-A (AITIN)	CONTINUED
			TAP SIZE REFERENCE ONLY	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS		
7,25 mm	0.2854	M8 X 0,75	8,0	91,0	53,0	43,0	36,0	64145		
7,3 mm	0.2874		8,0	91,0	53,0	43,0	36,0	64146		
L	0.2900	7.37	5/16	3-5/8	2-5/64	1-51/64	1-7/16	52345		
7,4 mm	0.2913		8,0	91,0	53,0	43,0	36,0	64147		
M	0.2950	7.49	5/16	3-5/8	2-5/64	1-51/64	1-7/16	52346		
7,5 mm	0.2953	M8 X 0,5	8,0	91,0	53,0	43,0	36,0	64148		
19/64	0.2969	7.54	5/16	3-5/8	2-5/64	1-51/64	1-7/16	51516		
7,6 mm	0.2992		8,0	91,0	53,0	43,0	36,0	64149		
N	0.3020	7.67	5/16	3-5/8	2-5/64	1-51/64	1-7/16	52347		
7,7 mm	0.3031		8,0	91,0	53,0	43,0	36,0	64150		
7,8 mm	0.3071	M9 X 1,25	8,0	91,0	53,0	43,0	36,0	64151		
7,9 mm	0.3110		8,0	91,0	53,0	43,0	36,0	64152		
5/16	0.3125	7.94	3/8-16	5/16	3-5/8	2-5/64	1-51/64	1-7/16	51517	
8,0 mm	0.3150		M9 X 1	8,0	91,0	53,0	43,0	36,0	64153	
O	0.3160	8.03		3/8	4	2-13/32	2-1/8	1-9/16	52348	
8,1 mm	0.3189			10,0	103,0	61,0	49,0	40,0	64154	
8,2 mm	0.3228			10,0	103,0	61,0	49,0	40,0	64155	
P	0.3230	8.20		3/8	4	2-13/32	2-1/8	1-9/16	51518	
8,3 mm	0.3268			10,0	103,0	61,0	49,0	40,0	64156	
21/64	0.3281	8.33	3/8-20	3/8	4	2-13/32	2-1/8	1-9/16	51519	
8,4 mm	0.3307			10,0	103,0	61,0	49,0	40,0	64157	
Q	0.3320	8.43	3/8-24	3/8	4	2-13/32	2-1/8	1-9/16	51520	
8,5 mm	0.3346		M10 X 1,5	10,0	103,0	61,0	49,0	40,0	64158	
8,6 mm	0.3386			10,0	103,0	61,0	49,0	40,0	64159	
R	0.3390	8.61	3/8-32	3/8	4	2-13/32	2-1/8	1-9/16	52349	
8,7 mm	0.3425		M10 X 1,25	10,0	103,0	61,0	49,0	40,0	64160	
11/32	0.3438	8.73		3/8	4	2-13/32	2-1/8	1-9/16	51521	
8,8 mm	0.3465			10,0	103,0	61,0	49,0	40,0	64161	
S	0.3480	8.84		3/8	4	2-13/32	2-1/8	1-9/16	51522	
8,9 mm	0.3504			10,0	103,0	61,0	49,0	40,0	64162	
9,0 mm	0.3543		M10 X 1	10,0	103,0	61,0	49,0	40,0	64163	
T	0.3580	9.09		3/8	4	2-13/32	2-1/8	1-9/16	52350	
9,1 mm	0.3583			10,0	103,0	61,0	49,0	40,0	64164	
23/64	0.3594	9.13		3/8	4	2-13/32	2-1/8	1-9/16	51523	
9,2 mm	0.3622		M10 X 0,75	10,0	103,0	61,0	49,0	40,0	64165	
9,25 mm	0.3642			10,0	103,0	61,0	49,0	40,0	64166	
9,3 mm	0.3661			10,0	103,0	61,0	49,0	40,0	64167	
U	0.3680	9.35	7/16-14	3/8	4	2-13/32	2-1/8	1-9/16	51524	
9,4 mm	0.3701			10,0	103,0	61,0	49,0	40,0	64168	
9,5 mm	0.3740		M10 X 0,5	10,0	103,0	61,0	49,0	40,0	64169	
3/8	0.3750	9.53		3/8	4	2-13/32	2-1/8	1-9/16	51525	
V	0.3770	9.58		1/2	4	2-13/32	2-1/8	1-9/16	52351	
9,6 mm	0.3780			10,0	103,0	61,0	49,0	40,0	64170	
9,7 mm	0.3819			10,0	103,0	61,0	49,0	40,0	64171	
9,8 mm	0.3858			10,0	103,0	61,0	49,0	40,0	64172	
W	0.3860	9.80		1/2	4	2-13/32	2-1/8	1-9/16	51526	
9,9 mm	0.3898			10,0	103,0	61,0	49,0	40,0	64173	
25/64	0.3906	9.92	7/16-20	1/2	4	2-13/32	2-1/8	1-9/16	51527	

continued on next page

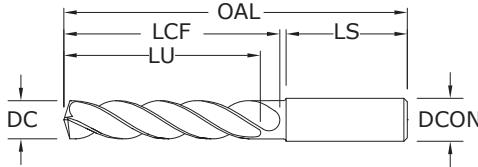

135 5xD

FRACTIONAL & METRIC SERIES

- Double margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point eliminates the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 56 HRC (≤ 577 Bhn)

inch & mm									EDP NO.
CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	TAP SIZE REFERENCE ONLY	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS	Ti-NAMITE-A (AITIN)
10,0 mm	0.3937			10,0	103,0	61,0	49,0	40,0	64174
X	0.3970	10.08	7/16-24	1/2	4-11/16	2-3/4	2-23/64	1-49/64	52352
10,1 mm	0.3976			12,0	118,0	71,0	56,0	45,0	64175
10,2 mm	0.4016			12,0	118,0	71,0	56,0	45,0	64176
Y	0.4040	10.26	7/16-28	1/2	4-11/16	2-3/4	2-23/64	1-49/64	52353
10,3 mm	0.4055			12,0	118,0	71,0	56,0	45,0	64177
13/32	0.4062	10.32		1/2	4-11/16	2-3/4	2-23/64	1-49/64	51528
10,4 mm	0.4095			12,0	118,0	71,0	56,0	45,0	64178
Z	0.4130	10.49		1/2	4-11/16	2-3/4	2-23/64	1-49/64	52354
10,5 mm	0.4134		M12 X 1,5	12,0	118,0	71,0	56,0	45,0	64179
10,6 mm	0.4173			12,0	118,0	71,0	56,0	45,0	64180
10,7 mm	0.4213			12,0	118,0	71,0	56,0	45,0	64181
27/64	0.4219	10.72	1/2-13	1/2	4-11/16	2-3/4	2-23/64	1-49/64	51529
10,8 mm	0.4252		M12 X 1,25	12,0	118,0	71,0	56,0	45,0	64182
10,9 mm	0.4291			12,0	118,0	71,0	56,0	45,0	64183
11,0 mm	0.4331			12,0	118,0	71,0	56,0	45,0	64184
11,1 mm	0.4370		M12 X 1	12,0	118,0	71,0	56,0	45,0	64185
7/16	0.4375	11.11	1/4-18 NPT	1/2	4-11/16	2-3/4	2-23/64	1-49/64	51530
11,2 mm	0.4409			12,0	118,0	71,0	56,0	45,0	64186
11,25 mm	0.4429			12,0	118,0	71,0	56,0	45,0	64187
11,3 mm	0.4449			12,0	118,0	71,0	56,0	45,0	64188
11,4 mm	0.4488			12,0	118,0	71,0	56,0	45,0	64189
11,5 mm	0.4528		M12 X 0,5	12,0	118,0	71,0	56,0	45,0	64190
29/64	0.4531	11.51	1/2-20	1/2	4-11/16	2-3/4	2-23/64	1-49/64	51531
11,6 mm	0.4567			12,0	118,0	71,0	56,0	45,0	64191
11,7 mm	0.4606			12,0	118,0	71,0	56,0	45,0	64192
11,8 mm	0.4646			12,0	118,0	71,0	56,0	45,0	64193
11,9 mm	0.4685			12,0	118,0	71,0	56,0	45,0	64194
15/32	0.4688	11.91	1/2-28	1/2	4-11/16	2-3/4	2-23/64	1-49/64	51532
12,0 mm	0.4724		M14 X 2	12,0	118,0	71,0	56,0	45,0	64195
31/64	0.4844	12.30	9/16-12	1/2	4-7/8	3-1/32	2-19/32	1-49/64	51533
12,5 mm	0.4921		M14 X 1,5	14,0	124,0	77,0	60,0	45,0	64196
1/2	0.5000	12.70		1/2	4-7/8	3-1/32	2-19/32	1-49/64	51534
12,8 mm	0.5039		M14 X 1,25	14,0	124,0	77,0	60,0	45,0	64197
13,0 mm	0.5118		M14 X 1	14,0	124,0	77,0	60,0	45,0	64198
33/64	0.5156	13.10	9/16-18	5/8	4-7/8	3-1/32	2-19/32	1-49/64	51535
17/32	0.5312	13.49	5/8-11	5/8	4-7/8	3-1/32	2-19/32	1-49/64	51536
13,5 mm	0.5315			14,0	124,0	77,0	60,0	45,0	64199

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+,.00047
DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+,.00063
DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+,.00083
DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+,.00098
DCON = h₆

>.7087-.11811 DIAMETER

DC = +.00031/+,.00114
DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +.0022/+,.0012
DCON = h₆

>3-6 DIAMETER

DC = +.0044/+,.0016
DCON = h₆

>6-10 DIAMETER

DC = +.0066/+,.0021
DCON = h₆

>10-18 DIAMETER

DC = +.0077/+,.0025
DCON = h₆

>18-30 DIAMETER

DC = +.0088/+,.0029
DCON = h₆

STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

TITANIUM

NON-FERROUS

HARDENED STEELS

For patent information visit www.ksptpatents.com



135 5xD

FRACTIONAL & METRIC SERIES

CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	inch & mm						EDP NO. Ti-NAMITE-A (AITIN)
			TAP SIZE REFERENCE ONLY	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS	
35/64	0.5469	13.89	5/8-12	5/8	4-7/8	3-1/32	2-19/32	1-49/64	51537
14,0 mm	0.5512		M16 X 2	14,0	124,0	77,0	60,0	45,0	64200
9/16	0.5625	14.29		5/8	5-1/4	3-1/4	2-3/4	1-57/64	51538
14,5 mm	0.5709		M16 X 1,5	16,0	133,0	83,0	63,0	48,0	64201
37/64	0.5781	14.68	5/8-18	5/8	5-1/4	3-1/4	2-3/4	1-57/64	51539
15,0 mm	0.5906		M16 X 1	16,0	133,0	83,0	63,0	48,0	64202
19/32	0.5938	15.08	11/16-11	5/8	5-1/4	3-1/4	2-3/4	1-57/64	51592
39/64	0.6094	15.48	11/16-12	5/8	5-1/4	3-1/4	2-3/4	1-57/64	51593
15,5 mm	0.6102		M18 X 2,5	16,0	133,0	83,0	63,0	48,0	64203
5/8	0.6250	15.88	11/16-16	5/8	5-1/4	3-1/4	2-3/4	1-57/64	51540
16,0 mm	0.6299			16,0	133,0	83,0	63,0	48,0	64204
41/64	0.6406	16.27	11/16-24	3/4	5-5/8	3-5/8	3-3/16	1-57/64	51594
16,5 mm	0.6496		M18 X 1,5	18,0	143,0	93,0	71,0	48,0	64205
21/32	0.6562	16.67	3/4-10	3/4	5-5/8	3-5/8	3-3/16	1-57/64	51541
17,0 mm	0.6693			18,0	143,0	93,0	71,0	48,0	64206
43/64	0.6719	17.07	3/4-12	3/4	5-5/8	3-5/8	3-3/16	1-57/64	51595
11/16	0.6875	17.46	3/4-16	3/4	5-5/8	3-5/8	3-3/16	1-57/64	51542
17,5 mm	0.6890		M20 X 2,5	18,0	143,0	93,0	71,0	48,0	64207
45/64	0.7031	17.86	3/4-20, 1/2-14 NPT	3/4	5-5/8	3-5/8	3-3/16	1-57/64	51543
18,0 mm	0.7087			18,0	143,0	93,0	71,0	48,0	64208
23/32	0.7188	18.26		3/4	6	4	3-3/8	1-31/32	51596
18,5 mm	0.7283		M20 X 1,5	20,0	153,0	101,0	77,0	50,0	64209
47/64	0.7344	18.65	13/16-12	3/4	6	4	3-3/8	1-31/32	51544
19,0 mm	0.7480			20,0	153,0	101,0	77,0	50,0	64210
3/4	0.7500	19.05	13/16-16	3/4	6	4	3-3/8	1-31/32	51545
49/64	0.7656	19.45	7/8-9	7/8	6	4	3-3/8	1-31/32	52355
19,5 mm	0.7677		M22 X 2,5	20,0	153,0	101,0	77,0	50,0	64211
25/32	0.7812	19.84		7/8	6	4	3-3/8	1-31/32	52356
20,0 mm	0.7874			20,0	153,0	101,0	77,0	50,0	64212
51/64	0.7969	20.24	7/8-12	7/8	6	4	3-3/8	1-31/32	52357
20,5 mm	0.8071			22,0	153,0	101,0	77,0	50,0	64533
13/16	0.8125	20.64	7/8-14	7/8	6-1/2	4-1/2	3-7/8	1-31/32	52358
21,0 mm	0.8268			22,0	153,0	101,0	77,0	50,0	64534
22,0 mm	0.8661			22,0	178,0	127,0	108,0	50,0	64535
7/8	0.8750	22.23	15/16-16, 1-8	7/8	6-1/2	4-1/2	3-7/8	1-31/32	52359
59/64	0.9219	23.42	1-12	1	7	5	4-3/8	2-1/8	52360

CONTINUED

FRACTIONAL

Hi-PerCarb®

Series 135 5D Fractional		Hardness	Vc (sfm)	DC • in							
				1/32	1/8	1/4	3/8	1/2	5/8	7/8	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc	345 (276-414)	RPM Fr Feed (ipm)	42173 0.0010 42.0	10543 0.0040 42.0	5272 0.0080 42.0	3514 0.0120 42.0	2636 0.0159 42.0	2109 0.0199 42.0	1506 0.0279 42.0
		≤ 275 Bhn or ≤ 28 HRc	310 (248-372)	RPM Fr Feed (ipm)	37894 0.0009 34.0	9474 0.0036 34.0	4737 0.0072 34.0	3158 0.0108 34.0	2368 0.0144 34.0	1895 0.0179 34.0	1353 0.0251 34.0
		≤ 425 Bhn or ≤ 45 HRc	180 (144-216)	RPM Fr Feed (ipm)	22003 0.0007 16.5	5501 0.0030 16.5	2750 0.0060 16.5	1834 0.0090 16.5	1375 0.0120 16.5	1100 0.0150 16.5	786 0.0210 16.5
		≤ 275 Bhn or ≤ 28 HRc	270 (216-324)	RPM Fr Feed (ipm)	33005 0.0008 25.0	8251 0.0030 25.0	4126 0.0061 25.0	2750 0.0091 25.0	2063 0.0121 25.0	1650 0.0151 25.0	1179 0.0212 25.0
		≤ 375 Bhn or ≤ 40 HRc	165 (132-198)	RPM Fr Feed (ipm)	20170 0.0006 13.0	5042 0.0026 13.0	2521 0.0052 13.0	1681 0.0077 13.0	1261 0.0103 13.0	1008 0.0129 13.0	720 0.0180 13.0
		≤ 450 Bhn or ≤ 48 HRc	115 (92-138)	RPM Fr Feed (ipm)	14058 0.0004 6.2	3514 0.0018 6.2	1757 0.0035 6.2	1171 0.0053 6.2	879 0.0071 6.2	703 0.0088 6.2	502 0.0123 6.2
	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 185 Bhn or ≤ 9 HRc	250 (200-300)	RPM Fr Feed (ipm)	30560 0.0006 19.5	7640 0.0026 19.5	3820 0.0051 19.5	2547 0.0077 19.5	1910 0.0102 19.5	1528 0.0128 19.5	1091 0.0179 19.5
		≤ 275 Bhn or ≤ 28 HRc	150 (120-180)	RPM Fr Feed (ipm)	18336 0.0005 9.0	4584 0.0020 9.0	2292 0.0039 9.0	1528 0.0059 9.0	1146 0.0079 9.0	917 0.0098 9.0	655 0.0137 9.0
		≤ 275 Bhn or ≤ 28 HRc	80 (64-96)	RPM Fr Feed (ipm)	9779 0.0005 4.8	2445 0.0020 4.8	1222 0.0039 4.8	815 0.0059 4.8	611 0.0079 4.8	489 0.0098 4.8	349 0.0137 4.8
		≤ 375 Bhn or ≤ 40 HRc	55 (44-66)	RPM Fr Feed (ipm)	6723 0.0004 3.0	1681 0.0018 3.0	840 0.0036 3.0	560 0.0054 3.0	420 0.0071 3.0	336 0.0089 3.0	240 0.0125 3.0
K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	300 (240-360)	RPM Fr Feed (ipm)	36672 0.0011 41.0	9168 0.0045 41.0	4584 0.0089 41.0	3056 0.0134 41.0	2292 0.0179 41.0	1834 0.0224 41.0	1310 0.0313 41.0
		≤ 260 Bhn or ≤ 26 HRc	265 (212-318)	RPM Fr Feed (ipm)	32394 0.0011 37.0	8098 0.0046 37.0	4049 0.0091 37.0	2699 0.0137 37.0	2025 0.0183 37.0	1620 0.0228 37.0	1157 0.0320 37.0

continued on next page

FRACTIONAL
Hi-PerCarb®

Series 135 5D Fractional		Hardness	Vc (sfm)	DC • in							
N	COPPER ALLOYS Alum Bronze, C110, Muntz Brass			1/32	1/8	1/4	3/8	1/2	5/8	7/8	
	≤ 80 Bhn or ≤ 47 HRb	635 (508-762)	RPM	77622	19406	9703	6469	4851	3881	2772	
			Fr	0.0012	0.0049	0.0099	0.0148	0.0198	0.0247	0.0346	
	≤ 150 Bhn or ≤ 7 HRc	540 (432-648)	RPM	66010	16502	8251	5501	4126	3300	2357	
			Fr	0.0012	0.0050	0.0099	0.0149	0.0199	0.0248	0.0348	
			Feed (ipm)	82.0	82.0	82.0	82.0	82.0	82.0	82.0	
	≤ 140 Bhn or ≤ 3 HRc	450 (360-540)	RPM	55008	13752	6876	4584	3438	2750	1965	
			Fr	0.0005	0.0020	0.0040	0.0060	0.0080	0.0100	0.0140	
	≤ 200 Bhn or ≤ 23 HRc	360 (288-432)	RPM	44006	11002	5501	3667	2750	2200	1572	
			Fr	0.0005	0.0020	0.0040	0.0060	0.0080	0.0100	0.0140	
			Feed (ipm)	22.0	22.0	22.0	22.0	22.0	22.0	22.0	
S	SUPER ALLOYS (Nickel, Cobalt, Iron Base) Inconel 601, 617, 625, Incoloy, Monel 400, Rene, Waspaloy	≤ 300 Bhn or ≤ 32 HRc	40 (32-48)	RPM	4890	1222	611	407	306	244	175
				Fr	0.0002	0.0008	0.0016	0.0025	0.0033	0.0041	0.0057
				Feed (ipm)	1.0	1.0	1.0	1.0	1.0	1.0	1.0
		≤ 400 Bhn or ≤ 43 HRc	20 (16-24)	RPM	2445	611	306	204	153	122	87
				Fr	0.0002	0.0007	0.0013	0.0020	0.0026	0.0033	0.0046
				Feed (ipm)	0.4	0.4	0.4	0.4	0.4	0.4	0.4
		≤ 275 Bhn or ≤ 28 HRc	105 (84-126)	RPM	12835	3209	1604	1070	802	642	458
				Fr	0.0005	0.0018	0.0036	0.0054	0.0072	0.0090	0.0127
				Feed (ipm)	5.8	5.8	5.8	5.8	5.8	5.8	5.8
		≤ 350 Bhn or ≤ 38 HRc	80 (64-96)	RPM	9779	2445	1222	815	611	489	349
				Fr	0.0004	0.0016	0.0032	0.0048	0.0064	0.0080	0.0112
				Feed (ipm)	3.9	3.9	3.9	3.9	3.9	3.9	3.9
		≤ 440 Bhn or ≤ 47 HRc	42 (34-50)	RPM	5134	1284	642	428	321	257	183
				Fr	0.0003	0.0012	0.0025	0.0037	0.0050	0.0062	0.0087
				Feed (ipm)	1.6	1.6	1.6	1.6	1.6	1.6	1.6
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 200 Bhn or ≤ 13 HRc	120 (96-144)	RPM	14669	3667	1834	1222	917	733	524
				Fr	0.0006	0.0026	0.0051	0.0077	0.0103	0.0128	0.0179
				Feed (ipm)	9.4	9.4	9.4	9.4	9.4	9.4	9.4
		≤ 375 Bhn or ≤ 40 HRc	80 (64-96)	RPM	9779	2445	1222	815	611	489	349
				Fr	0.0003	0.0012	0.0024	0.0036	0.0047	0.0059	0.0083
				Feed (ipm)	2.9	2.9	2.9	2.9	2.9	2.9	2.9
		≤ 475 Bhn or ≤ 50 HRc	70 (56-84)	RPM	8557	2139	1070	713	535	428	306
				Fr	0.0002	0.0008	0.0016	0.0024	0.0032	0.0040	0.0056
				Feed (ipm)	1.7	1.7	1.7	1.7	1.7	1.7	1.7

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = Vc x 3.82 / DC

ipm = Fr x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Hi-PerCarb®

Series 135M 5D Metric		Hardness	Vc (m/min)	DC • mm								
				1.5	3	6	8	10	12	16	20	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc	105 (84-126)	RPM Fr Feed (mm/min)	22297 0.048 1060	11148 0.095 1060	5574 0.190 1060	4181 0.254 1060	3344 0.317 1060	2787 0.380 1060	2090 0.507 1060	1672 0.634 1060
		≤ 275 Bhn or ≤ 28 HRc	94 (76-113)	RPM Fr Feed (mm/min)	20035 0.043 855	10017 0.085 855	5009 0.171 855	3756 0.228 855	3005 0.285 855	2504 0.341 855	1878 0.455 855	1503 0.569 855
		≤ 425 Bhn or ≤ 45 HRc	55 (44-66)	RPM Fr Feed (mm/min)	11633 0.036 415	5816 0.071 415	2908 0.143 415	2181 0.190 415	1745 0.238 415	1454 0.285 415	1091 0.381 415	872 0.476 415
		≤ 275 Bhn or ≤ 28 HRc	82 (66-99)	RPM Fr Feed (mm/min)	17449 0.036 625	8725 0.072 625	4362 0.143 625	3272 0.191 625	2617 0.239 625	2181 0.287 625	1636 0.382 625	1309 0.478 625
		≤ 375 Bhn or ≤ 40 HRc	50 (40-60)	RPM Fr Feed (mm/min)	10664 0.031 330	5332 0.062 330	2666 0.124 330	1999 0.165 330	1600 0.206 330	1333 0.248 330	1000 0.330 330	800 0.413 330
		≤ 450 Bhn or ≤ 48 HRc	35 (28-42)	RPM Fr Feed (mm/min)	7432 0.022 160	3716 0.043 160	1858 0.086 160	1394 0.115 160	1115 0.144 160	929 0.172 160	697 0.230 160	557 0.287 160
		≤ 185 Bhn or ≤ 9 HRc	76 (61-91)	RPM Fr Feed (mm/min)	16157 0.031 495	8078 0.061 495	4039 0.123 495	3029 0.163 495	2424 0.204 495	2020 0.245 495	1515 0.327 495	1212 0.408 495
		≤ 275 Bhn or ≤ 28 HRc	46 (37-55)	RPM Fr Feed (mm/min)	9694 0.024 230	4847 0.047 230	2424 0.095 230	1818 0.127 230	1454 0.158 230	1212 0.190 230	909 0.253 230	727 0.316 230
		≤ 275 Bhn or ≤ 28 HRc	24 (20-29)	RPM Fr Feed (mm/min)	5170 0.023 120	2585 0.046 120	1293 0.093 120	969 0.124 120	776 0.155 120	646 0.186 120	485 0.248 120	388 0.309 120
		≤ 375 Bhn or ≤ 40 HRc	17 (13-20)	RPM Fr Feed (mm/min)	3555 0.021 75	1777 0.042 75	889 0.084 75	666 0.113 75	533 0.141 75	444 0.169 75	333 0.225 75	267 0.281 75
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 220 Bhn or ≤ 19 HRc	91 (73-110)	RPM Fr Feed (mm/min)	19388 0.054 1050	9694 0.108 1050	4847 0.217 1050	3635 0.289 1050	2908 0.361 1050	2424 0.433 1050	1818 0.578 1050	1454 0.722 1050
		≤ 260 Bhn or ≤ 26 HRc	81 (65-97)	RPM Fr Feed (mm/min)	17126 0.055 935	8563 0.109 935	4282 0.218 935	3211 0.291 935	2569 0.364 935	2141 0.437 935	1606 0.582 935	1284 0.728 935
		≤ 220 Bhn or ≤ 19 HRc	91 (73-110)	RPM Fr Feed (mm/min)	19388 0.054 1050	9694 0.108 1050	4847 0.217 1050	3635 0.289 1050	2908 0.361 1050	2424 0.433 1050	1818 0.578 1050	1454 0.722 1050
		≤ 260 Bhn or ≤ 26 HRc	81 (65-97)	RPM Fr Feed (mm/min)	17126 0.055 935	8563 0.109 935	4282 0.218 935	3211 0.291 935	2569 0.364 935	2141 0.437 935	1606 0.582 935	1284 0.728 935
K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	91 (73-110)	RPM Fr Feed (mm/min)	19388 0.054 1050	9694 0.108 1050	4847 0.217 1050	3635 0.289 1050	2908 0.361 1050	2424 0.433 1050	1818 0.578 1050	1454 0.722 1050
		≤ 260 Bhn or ≤ 26 HRc	81 (65-97)	RPM Fr Feed (mm/min)	17126 0.055 935	8563 0.109 935	4282 0.218 935	3211 0.291 935	2569 0.364 935	2141 0.437 935	1606 0.582 935	1284 0.728 935

continued on next page

Series 135M 5D Metric		Hardness	Vc (m/min)	DC • mm								
				1.5	3	6	8	10	12	16	20	
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80 Bhn or ≤ 47 HRb	194 (155-232)	RPM Fr	41039 0.059	20519 0.118	10260 0.237	7695 0.316	6156 0.395	5130 0.474	3847 0.632	3078 0.790
		≤ 150 Bhn or ≤ 7 HRc	165 (132-198)	RPM Fr	34899 0.059	17449 0.118	8725 0.237	6544 0.316	5235 0.394	4362 0.473	3272 0.631	2617 0.789
		≤ 140 Bhn or ≤ 3 HRc	137 (110-165)	RPM Fr	29082 0.027	14541 0.053	7271 0.107	5453 0.142	4362 0.178	3635 0.213	2726 0.284	2181 0.355
		Copper Alloys Alum Bronze, C110, Muntz Brass	110 (88-132)	RPM Fr	23266 0.027	11633 0.054	5816 0.108	4362 0.144	3490 0.181	2908 0.217	2181 0.289	1745 0.361
S	SUPER ALLOYS (Nickel, Cobalt, Iron Base) Inconel 601, 617, 625, Incoloy, Monel 400, Rene, Waspaloy	≤ 300 Bhn or ≤ 32 HRc	12 (10-15)	RPM Fr	2585 0.010	1293 0.019	646 0.039	485 0.052	388 0.064	323 0.077	242 0.103	194 0.129
		≤ 400 Bhn or ≤ 43 HRc	6 (5-7)	RPM Fr	1293 0.007	646 0.014	323 0.028	242 0.037	194 0.046	162 0.056	121 0.074	97 0.093
		≤ 275 Bhn or ≤ 28 HRc	32 (26-38)	RPM Fr	6786 0.021	3393 0.043	1696 0.085	1272 0.114	1018 0.142	848 0.171	636 0.228	509 0.285
		TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	24 (20-29)	RPM Fr	5170 0.019	2585 0.039	1293 0.077	969 0.103	776 0.129	646 0.155	485 0.206	388 0.258
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 440 Bhn or ≤ 47 HRc	13 (10-15)	RPM Fr	2714 0.015	1357 0.029	679 0.059	509 0.079	407 0.098	339 0.118	254 0.157	204 0.196
		≤ 200 Bhn or ≤ 13 HRc	37 (29-44)	RPM Fr	7755 0.031	3878 0.062	1939 0.124	1454 0.165	1163 0.206	969 0.248	727 0.330	582 0.413
		≤ 375 Bhn or ≤ 40 HRc	24 (20-29)	RPM Fr	5170 0.015	2585 0.029	1293 0.058	969 0.077	776 0.097	646 0.116	485 0.155	388 0.193
		≤ 475 Bhn or ≤ 50 HRc	21 (17-26)	RPM Fr	4524 0.010	2262 0.020	1131 0.040	848 0.053	679 0.066	565 0.080	424 0.106	339 0.133



Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fr x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

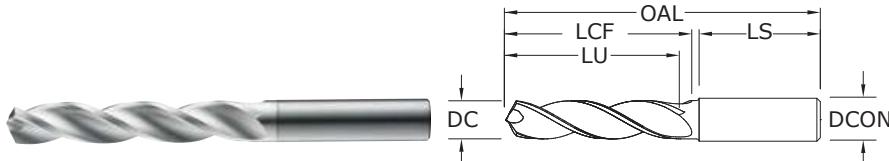

131N 3xD

FRACTIONAL & METRIC SERIES

- Triple margin design improves hole stability and size control while providing superior finish, roundness and cylindricity
- Self-stabilizing pyramid point design stabilizes the drill on contact with the workpiece
- Open flute structure efficiently transports chips while maintaining strength at high feed rates
- Sculpted gash allows chips to easily flow away from the drill center
- Recommended for materials ≤ 175 Bhn (≤ 16 HRc)

CUTTING DIAMETER DC	DECIMAL EQUIV. 0.1181	METRIC EQUIV. 0.1220	TAP SIZE REFERENCE ONLY	SHANK DIAMETER DCON	inch & mm			EDP NO.
					OAL	LCF	FLUTE LENGTH LU	
3,0 mm	0.1181			6,0	62,0	20,0	14,0	64600 67600
3,1 mm	0.1220			6,0	62,0	20,0	14,0	64601 67601
1/8	0.1250	3.18		6,0	62,0	20,0	14,0	54600 54700
3,2 mm	0.1260	M3,5 X 0,35		6,0	62,0	20,0	14,0	64602 67602
3,3 mm	0.1299	M4 X 0,7		6,0	62,0	20,0	14,0	64603 67603
3,4 mm	0.1339			6,0	62,0	20,0	14,0	64604 67604
#29	0.1360	3.45	8-32,8-36	6,0	62,0	20,0	14,0	54601 54701
3,5 mm	0.1378		M4 X 0,5	6,0	62,0	20,0	14,0	64605 67605
9/64	0.1406	3.57		6,0	62,0	20,0	14,0	54602 54702
3,6 mm	0.1417		M4 X 0,35	6,0	62,0	20,0	14,0	64606 67606
3,7 mm	0.1457		M4,5 X 0,75	6,0	62,0	20,0	14,0	64607 67607
3,8 mm	0.1496		10-24	6,0	66,0	24,0	17,0	64608 67608
3,9 mm	0.1535			6,0	66,0	24,0	17,0	64609 67609
5/32	0.1562	3.97		6,0	66,0	24,0	17,0	54603 54703
4,0 mm	0.1575		M4,5 X 0,5	6,0	66,0	24,0	17,0	64610 67610
#21	0.1590	4.04	10-32	6,0	66,0	24,0	17,0	54604 54704
4,1 mm	0.1614			6,0	66,0	24,0	17,0	64611 67611
4,2 mm	0.1654		M5 / M5 X 0,75	6,0	66,0	24,0	17,0	64612 67612
4,3 mm	0.1693			6,0	66,0	24,0	17,0	64613 67613
11/64	0.1719	4.37		6,0	66,0	24,0	17,0	54605 54705
4,4 mm	0.1732		12-24	6,0	66,0	24,0	17,0	64614 67614
4,5 mm	0.1772		M5 X 0,5	6,0	66,0	24,0	17,0	64615 67615
4,6 mm	0.1811		12-28	6,0	66,0	24,0	17,0	64616 67616
4,7 mm	0.1850		12-32	6,0	66,0	24,0	17,0	64617 67617
3/16	0.1875	4.76		6,0	66,0	28,0	20,0	54606 54706
4,8 mm	0.1890		7/32-32	6,0	66,0	28,0	20,0	64618 67618
4,9 mm	0.1929			6,0	66,0	28,0	20,0	64619 67619
5,0 mm	0.1969		M6 X 1	6,0	66,0	28,0	20,0	64620 67620
5,1 mm	0.2008		1/4-20	6,0	66,0	28,0	20,0	64621 67621
13/64	0.2031	5.16		6,0	66,0	28,0	20,0	54607 54707
5,2 mm	0.2047		M6 X 0,75	6,0	66,0	28,0	20,0	64622 67622
5,3 mm	0.2087			6,0	66,0	28,0	20,0	64623 67623
5,4 mm	0.2126			6,0	66,0	28,0	20,0	64624 67624
5,5 mm	0.2165		M6 X 0,5	6,0	66,0	28,0	20,0	64625 67625
7/32	0.2188	5.56	1/4-32	6,0	66,0	28,0	20,0	54608 54708
5,6 mm	0.2205			6,0	66,0	28,0	20,0	64626 67626

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+,.00047

DCON = h₆

>.1181–.2362 DIAMETER

DC = +.00016/+,.00063

DCON = h₆

>.2362–.3937 DIAMETER

DC = +.00024/+,.00083

DCON = h₆

>.3937–.7087 DIAMETER

DC = +.00028/+,.00098

DCON = h₆

>.7087–1.1811 DIAMETER

DC = +.00031/+,.00114

DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +.0002/+,.0012

DCON = h₆

>3–6 DIAMETER

DC = +.0004/+,.0016

DCON = h₆

>6–10 DIAMETER

DC = +.0006/+,.0021

DCON = h₆

>10–18 DIAMETER

DC = +.0007/+,.0025

DCON = h₆

NON-FERROUS

PLASTICS/COMPOSITES

For patent information visit
www.ksptpatents.com



HIGH PERFORMANCE CARBIDE DRILLS



FRACTIONAL & METRIC
Hi-PerCarb®

131N 3xD

FRACTIONAL & METRIC SERIES

CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	TAP SIZE REFERENCE ONLY	inch & mm						EDP NO.	CONTINUED
				DCON	OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS	UNCOATED Ti-NAMITE-B (TiB ₂)		
5,7 mm	0.2244			6,0	66,0	28,0	20,0	36,0	64627	67627	
5,8 mm	0.2283			6,0	66,0	28,0	20,0	36,0	64628	67628	
5,9 mm	0.2323			6,0	66,0	28,0	20,0	36,0	64629	67629	
15/64	0.2344	5.95		6,0	66,0	28,0	20,0	36,0	54609	54709	
6,0 mm	0.2362		M7 X 1	6,0	66,0	28,0	20,0	36,0	64630	67630	
6,1 mm	0.2402			8,0	79,0	34,0	24,0	36,0	64631	67631	
6,2 mm	0.2441		M7 X 0,75	8,0	79,0	34,0	24,0	36,0	64632	67632	
6,3 mm	0.2480			8,0	79,0	34,0	24,0	36,0	64633	67633	
1/4	0.2500	6.35		8,0	79,0	34,0	24,0	36,0	54610	54710	
6,4 mm	0.2520			8,0	79,0	34,0	24,0	36,0	64634	67634	
6,5 mm	0.2559			8,0	79,0	34,0	24,0	36,0	64635	67635	
F	0.2570	6.53	5/16-18	8,0	79,0	34,0	24,0	36,0	54611	54711	
6,6 mm	0.2598			8,0	79,0	34,0	24,0	36,0	64636	67636	
6,7 mm	0.2638			8,0	79,0	34,0	24,0	36,0	64637	67637	
17/64	0.2656	6.75	5/16-20	8,0	79,0	34,0	24,0	36,0	54612	54712	
6,8 mm	0.2677		M8 X 1,25	8,0	79,0	34,0	24,0	36,0	64638	67638	
6,9 mm	0.2717		5/16-24	8,0	79,0	34,0	24,0	36,0	64639	67639	
7,0 mm	0.2756		M8 X 1	8,0	79,0	34,0	24,0	36,0	64640	67640	
7,1 mm	0.2795			8,0	79,0	41,0	29,0	36,0	64641	67641	
9/32	0.2812	7.14	5/16-32	8,0	79,0	41,0	29,0	36,0	54613	54713	
7,2 mm	0.2835		M8 X 0,75	8,0	79,0	41,0	29,0	36,0	64642	67642	
7,3 mm	0.2874			8,0	79,0	41,0	29,0	36,0	64643	67643	
7,4 mm	0.2913			8,0	79,0	41,0	29,0	36,0	64644	67644	
7,5 mm	0.2953		M8 X 0,5	8,0	79,0	41,0	29,0	36,0	64645	67645	
19/64	0.2969	7.54		8,0	79,0	41,0	29,0	36,0	54614	54714	
7,6 mm	0.2992			8,0	79,0	41,0	29,0	36,0	64646	67646	
7,7 mm	0.3031			8,0	79,0	41,0	29,0	36,0	64647	67647	
7,8 mm	0.3071		M9 X 1,25	8,0	79,0	41,0	29,0	36,0	64648	67648	
7,9 mm	0.3110			8,0	79,0	41,0	29,0	36,0	64649	67649	
5/16	0.3125	7.94	3/8-16	8,0	79,0	41,0	29,0	36,0	54615	54715	
8,0 mm	0.3150		M9 X 1	8,0	79,0	41,0	29,0	36,0	64650	67650	
8,1 mm	0.3189			10,0	89,0	47,0	35,0	40,0	64651	67651	
8,2 mm	0.3228			10,0	89,0	47,0	35,0	40,0	64652	67652	
8,3 mm	0.3268			10,0	89,0	47,0	35,0	40,0	64653	67653	
21/64	0.3281	8.33	3/8-20	10,0	89,0	47,0	35,0	40,0	54616	54716	
8,4 mm	0.3307			10,0	89,0	47,0	35,0	40,0	64654	67654	
Q	0.3320	8.43	3/8-24	10,0	89,0	47,0	35,0	40,0	54617	54717	
8,5 mm	0.3346		M10 X 1,5	10,0	89,0	47,0	35,0	40,0	64655	67655	
8,6 mm	0.3386			10,0	89,0	47,0	35,0	40,0	64656	67656	
8,7 mm	0.3425			10,0	89,0	47,0	35,0	40,0	64657	67657	
11/32	0.3438	8.73	3/8-32	10,0	89,0	47,0	35,0	40,0	54618	54718	
8,8 mm	0.3465		M10 X 1,25	10,0	89,0	47,0	35,0	40,0	64658	67658	
8,9 mm	0.3504			10,0	89,0	47,0	35,0	40,0	64659	67659	
9,0 mm	0.3543		M10 X 1	10,0	89,0	47,0	35,0	40,0	64660	67660	
9,1 mm	0.3583			10,0	89,0	47,0	35,0	40,0	64661	67661	
23/64	0.3594	9.13		10,0	89,0	47,0	35,0	40,0	54619	54719	

continued on next page

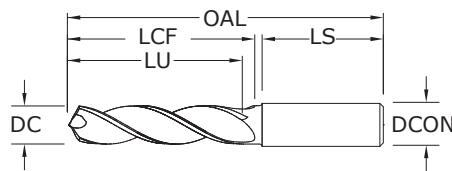

131N 3xD

FRACTIONAL & METRIC SERIES

- Triple margin design improves hole stability and size control while providing superior finish, roundness and cylindricity
- Self-stabilizing pyramid point design stabilizes the drill on contact with the workpiece
- Open flute structure efficiently transports chips while maintaining strength at high feed rates
- Sculpted gash allows chips to easily flow away from the drill center
- Recommended for materials ≤ 175 Bhn (≤ 16 HRc)

CUTTING DIAMETER DC	DECIMAL EQUIV. 0.3622	METRIC EQUIV. 0.3661	TAP SIZE REFERENCE ONLY	inch & mm				EDP NO.		
				DCON	OAL	FLUTE LENGTH	CLEARED SHANK LENGTH	UNCOATED Ti-NAMITE-B (TiB ₂)	64662 67662	
9,2 mm	0.3622	M10 X 0,75		10,0	89,0	47,0	35,0	40,0	64662 67662	
9,3 mm	0.3661			10,0	89,0	47,0	35,0	40,0	64663 67663	
U	0.3680	9.35	7/16-14	10,0	89,0	47,0	35,0	40,0	54620 54720	
9,4 mm	0.3701			10,0	89,0	47,0	35,0	40,0	64664 67664	
9,5 mm	0.3740		M11 / M10 X 0,5	10,0	89,0	47,0	35,0	40,0	64665 67665	
	3/8	0.3750	9.53		10,0	89,0	47,0	35,0	40,0	54621 54721
9,6 mm	0.3780			10,0	89,0	47,0	35,0	40,0	64666 67666	
9,7 mm	0.3819			10,0	89,0	47,0	35,0	40,0	64667 67667	
9,8 mm	0.3858			10,0	89,0	47,0	35,0	40,0	64668 67668	
9,9 mm	0.3898			10,0	89,0	47,0	35,0	40,0	64669 67669	
25/64	0.3906	9.92	7/16-20	10,0	89,0	47,0	35,0	40,0	54622 54722	
10,0 mm	0.3937			10,0	89,0	47,0	35,0	40,0	64670 67670	
10,1 mm	0.3976			12,0	102,0	55,0	40,0	45,0	64671 67671	
10,2 mm	0.4016		M12 X 1,75	12,0	102,0	55,0	40,0	45,0	64672 67672	
10,3 mm	0.4055			12,0	102,0	55,0	40,0	45,0	64673 67673	
13/32	0.4062	10.32		12,0	102,0	55,0	40,0	45,0	54623 54723	
10,4 mm	0.4094			12,0	102,0	55,0	40,0	45,0	64674 67674	
10,5 mm	0.4134		M12 X 1,5	12,0	102,0	55,0	40,0	45,0	64675 67675	
10,6 mm	0.4173			12,0	102,0	55,0	40,0	45,0	64676 67676	
10,7 mm	0.4213			12,0	102,0	55,0	40,0	45,0	64677 67677	
27/64	0.4219	10.72	1/2-13	12,0	102,0	55,0	40,0	45,0	54624 54724	
10,8 mm	0.4252		M12 X 1,25	12,0	102,0	55,0	40,0	45,0	64678 67678	
10,9 mm	0.4291			12,0	102,0	55,0	40,0	45,0	64679 67679	
11,0 mm	0.4331		M12 X 1	12,0	102,0	55,0	40,0	45,0	64680 67680	
11,1 mm	0.4370			12,0	102,0	55,0	40,0	45,0	64681 67681	
7/16	0.4375	11.11	1/4-18NPT	12,0	102,0	55,0	40,0	45,0	54625 54725	
11,2 mm	0.4409			12,0	102,0	55,0	40,0	45,0	64682 67682	
11,3 mm	0.4449			12,0	102,0	55,0	40,0	45,0	64683 67683	
11,4 mm	0.4488			12,0	102,0	55,0	40,0	45,0	64684 67684	
11,5 mm	0.4528		M12 X 0,5	12,0	102,0	55,0	40,0	45,0	64685 67685	
11,6 mm	0.4567			12,0	102,0	55,0	40,0	45,0	64686 67686	
11,7 mm	0.4606			12,0	102,0	55,0	40,0	45,0	64687 67687	
11,8 mm	0.4646			12,0	102,0	55,0	40,0	45,0	64688 67688	
11,9 mm	0.4685			12,0	102,0	55,0	40,0	45,0	64689 67689	
15/32	0.4688	11.91	1/2-28	12,0	102,0	55,0	40,0	45,0	54626 54726	
12,0 mm	0.4724		M14 X 2	12,0	102,0	55,0	40,0	45,0	64690 67690	

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+,.00047

DCON = h₆

>.1181–.2362 DIAMETER

DC = +.00016/+,.00063

DCON = h₆

>.2362–.3937 DIAMETER

DC = +.00024/+,.00083

DCON = h₆

>.3937–.7087 DIAMETER

DC = +.00028/+,.00098

DCON = h₆

>.7087–1.1811 DIAMETER

DC = +.00031/+,.00114

DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +.00024/+,.0012

DCON = h₆

>3–6 DIAMETER

DC = +.00044/+,.0016

DCON = h₆

>6–10 DIAMETER

DC = +.00064/+,.0021

DCON = h₆

>10–18 DIAMETER

DC = +.00074/+,.0025

DCON = h₆

NON-FERROUS

PLASTICS/COMPOSITES



For patent information visit www.ksptpatents.com



131N 3xD

FRACTIONAL & METRIC SERIES

inch & mm									EDP NO.		CONTINUED	
CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	TAP SIZE REFERENCE ONLY	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS	UNCOATED Ti-NAMITE-B (TiB ₂)	EDP NO.		
31/64	0.4844	12.30	9/16-12	14,0	107,0	60,0	43,0	45,0	54627	54727		
12,5 mm	0.4921		M14 X 1,5	14,0	107,0	60,0	43,0	45,0	64691	67691		
1/2	0.5000	12.70		14,0	107,0	60,0	43,0	45,0	54628	54728		
12,8 mm	0.5039		M14 X 1,25	14,0	107,0	60,0	43,0	45,0	64692	67692		
13,0 mm	0.5118		M14 X 1	14,0	107,0	60,0	43,0	45,0	64693	67693		
33/64	0.5156	13.10	9/16-18	14,0	107,0	60,0	43,0	45,0	54629	54729		
13,5 mm	0.5315			5/8-11	14,0	107,0	60,0	43,0	64694	67694		
13,8 mm	0.5433				14,0	107,0	60,0	43,0	64695	67695		
14,0 mm	0.5512		M16 X 2	14,0	107,0	60,0	43,0	45,0	64696	67696		
9/16	0.5625	14.29			16,0	115,0	65,0	45,0	48,0	54630	54730	
14,5 mm	0.5709		M16 X 1,5	16,0	115,0	65,0	45,0	48,0	64697	67697		
37/64	0.5781	14.68	5/8-18	16,0	115,0	65,0	45,0	48,0	54631	54731		
14,8 mm	0.5827				16,0	115,0	65,0	45,0	48,0	64698	67698	
15,0 mm	0.5906		M16 X 1	16,0	115,0	65,0	45,0	48,0	64699	67699		
15,5 mm	0.6102		M18 X 2,5	16,0	115,0	65,0	45,0	48,0	64700	67700		
15,8 mm	0.6220				16,0	115,0	65,0	45,0	48,0	64701	67701	
5/8	0.6250	15.88	11/16-16	16,0	115,0	65,0	45,0	48,0	54632	54732		
16,0 mm	0.6299				16,0	115,0	65,0	45,0	48,0	64702	67702	
21/32	0.6562	16.67	3/4-10	18,0	123,0	73,0	51,0	48,0	54633	54733		
11/16	0.6875	17.46	3/4-16	18,0	123,0	73,0	51,0	48,0	54634	54734		
3/4	0.7500	19.05	13/16-16	20,0	131,0	79,0	55,0	50,0	54635	54735		

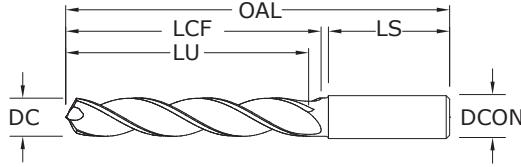

131N 5xD

FRACTIONAL & METRIC SERIES

- Triple margin design improves hole stability and size control while providing superior finish, roundness and cylindricity
- Self-stabilizing pyramid point design stabilizes the drill on contact with the workpiece
- Open flute structure efficiently transports chips while maintaining strength at high feed rates
- Sculpted gash allows chips to easily flow away from the drill center
- Recommended for materials ≤ 175 Bhn (≤ 16 HRc)

CUTTING DIAMETER DC	DECIMAL EQUIV. 0.1181	METRIC EQUIV. 0.1220	TAP SIZE REFERENCE ONLY	inch & mm					EDP NO.	
				SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS	UNCOATED Ti-NAMITE-B (TiB ₂)	65000 64800
3,0 mm	0.1181			6,0	66,0	28,0	23,0	36,0	65000 64800	
3,1 mm	0.1220			6,0	66,0	28,0	23,0	36,0	65001 64801	
1/8	0.1250	3.18		6,0	66,0	28,0	23,0	36,0	55000 54800	
3,2 mm	0.1260	M3,5 X 0,35		6,0	66,0	28,0	23,0	36,0	65002 64802	
3,3 mm	0.1299	M4 X 0,7		6,0	66,0	28,0	23,0	36,0	65003 64803	
3,4 mm	0.1339			6,0	66,0	28,0	23,0	36,0	65004 64804	
#29	0.1360	3.45	8-32,8-36	6,0	66,0	28,0	23,0	36,0	55001 54801	
3,5 mm	0.1378		M4 X 0,5	6,0	66,0	28,0	23,0	36,0	65005 64805	
9/64	0.1406	3.57		6,0	66,0	28,0	23,0	36,0	55002 54802	
3,6 mm	0.1417		M4 X 0,35	6,0	66,0	28,0	23,0	36,0	65006 64806	
3,7 mm	0.1457		M4,5 X 0,75	6,0	66,0	28,0	23,0	36,0	65007 64807	
3,8 mm	0.1496		10-24	6,0	74,0	36,0	29,0	36,0	65008 64808	
3,9 mm	0.1535			6,0	74,0	36,0	29,0	36,0	65009 64809	
5/32	0.1562	3.97		6,0	74,0	36,0	29,0	36,0	55003 54803	
4,0 mm	0.1575		M4,5 X 0,5	6,0	74,0	36,0	29,0	36,0	65010 64810	
#21	0.1590	4.04	10-32	6,0	74,0	36,0	29,0	36,0	55004 54804	
4,1 mm	0.1614			6,0	74,0	36,0	29,0	36,0	65011 64811	
4,2 mm	0.1654		M5 / M5 X 0,75	6,0	74,0	36,0	29,0	36,0	65012 64812	
4,3 mm	0.1693			6,0	74,0	36,0	29,0	36,0	65013 64813	
11/64	0.1719	4.37		6,0	74,0	36,0	29,0	36,0	55005 54805	
4,4 mm	0.1732		12-24	6,0	74,0	36,0	29,0	36,0	65014 64814	
4,5 mm	0.1772		M5 X 0,5	6,0	74,0	36,0	29,0	36,0	65015 64815	
4,6 mm	0.1811		12-28	6,0	74,0	36,0	29,0	36,0	65016 64816	
4,7 mm	0.1850		12-32	6,0	74,0	36,0	29,0	36,0	65017 64817	
3/16	0.1875	4.76		6,0	82,0	44,0	35,0	36,0	55006 54806	
4,8 mm	0.1890		7/32-32	6,0	82,0	44,0	35,0	36,0	65018 64818	
4,9 mm	0.1929			6,0	82,0	44,0	35,0	36,0	65019 64819	
5,0 mm	0.1969		M6 X 1	6,0	82,0	44,0	35,0	36,0	65020 64820	
5,1 mm	0.2008		1/4-20	6,0	82,0	44,0	35,0	36,0	65021 64821	
13/64	0.2031	5.16		6,0	82,0	44,0	35,0	36,0	55007 54807	
5,2 mm	0.2047		M6 X 0,75	6,0	82,0	44,0	35,0	36,0	65022 64822	
5,3 mm	0.2087			6,0	82,0	44,0	35,0	36,0	65023 64823	
5,4 mm	0.2126			6,0	82,0	44,0	35,0	36,0	65024 64824	
5,5 mm	0.2165		M6 X 0,5	6,0	82,0	44,0	35,0	36,0	65025 64825	
7/32	0.2188	5.56	1/4-32	6,0	82,0	44,0	35,0	36,0	55008 54808	

continued on next page

TOLERANCES (inch)

≤1.181 DIAMETER

DC = +.00008/+,.00047

DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+,.00063

DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+,.00083

DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+,.00098

DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+,.00114

DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +.00024/+,.0012

DCON = h₆

>3-6 DIAMETER

DC = +.00044/+,.0016

DCON = h₆

>6-10 DIAMETER

DC = +.00064/+,.0021

DCON = h₆

>10-18 DIAMETER

DC = +.00074/+,.0025

DCON = h₆

NON-FERROUS

PLASTICS/COMPOSITES

For patent information visit www.ksptpatents.com



FRACTIONAL & METRIC

Hi-PerCarb®**131N 5xD**

FRACTIONAL & METRIC SERIES


CONTINUED

CUTTING DIAMETER DC	DECIMAL EQUIV. 0.2205	METRIC EQUIV. 5,6 mm	inch & mm						EDP NO.	UNCOATED Ti-NAMITE-B (TiB ₂)
			TAP SIZE REFERENCE ONLY	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS		
5,6 mm	0.2205	5,6 mm		6,0	82,0	44,0	35,0	36,0	65026	64826
5,7 mm	0.2244	5,7 mm		6,0	82,0	44,0	35,0	36,0	65027	64827
5,8 mm	0.2283	5,8 mm		6,0	82,0	44,0	35,0	36,0	65028	64828
5,9 mm	0.2323	5,9 mm		6,0	82,0	44,0	35,0	36,0	65029	64829
15/64	0.2344	5.95		6,0	82,0	44,0	35,0	36,0	55009	54809
6,0 mm	0.2362		M7 X 1	6,0	82,0	44,0	35,0	36,0	65030	64830
6,1 mm	0.2402			8,0	91,0	53,0	43,0	36,0	65031	64831
6,2 mm	0.2441		M7 X 0,75	8,0	91,0	53,0	43,0	36,0	65032	64832
6,3 mm	0.2480			8,0	91,0	53,0	43,0	36,0	65033	64833
1/4	0.2500	6.35		8,0	91,0	53,0	43,0	36,0	55010	54810
6,4 mm	0.2520			8,0	91,0	53,0	43,0	36,0	65034	64834
6,5 mm	0.2559			8,0	91,0	53,0	43,0	36,0	65035	64835
F	0.2570	6.53	5/16-18	8,0	91,0	53,0	43,0	36,0	55011	54811
6,6 mm	0.2598			8,0	91,0	53,0	43,0	36,0	65036	64836
6,7 mm	0.2638			8,0	91,0	53,0	43,0	36,0	65037	64837
17/64	0.2656	6.75	5/16-20	8,0	91,0	53,0	43,0	36,0	55012	54812
6,8 mm	0.2677		M8 X 1,25	8,0	91,0	53,0	43,0	36,0	65038	64838
6,9 mm	0.2717		5/16-24	8,0	91,0	53,0	43,0	36,0	65039	64839
7,0 mm	0.2756		M8 X 1	8,0	91,0	53,0	43,0	36,0	65040	64840
7,1 mm	0.2795			8,0	91,0	53,0	43,0	36,0	65041	64841
9/32	0.2812	7.14	5/16-32	8,0	91,0	53,0	43,0	36,0	55013	54813
7,2 mm	0.2835		M8 X 0,75	8,0	91,0	53,0	43,0	36,0	65042	64842
7,3 mm	0.2874			8,0	91,0	53,0	43,0	36,0	65043	64843
7,4 mm	0.2913			8,0	91,0	53,0	43,0	36,0	65044	64844
7,5 mm	0.2953		M8 X 0,5	8,0	91,0	53,0	43,0	36,0	65045	64845
19/64	0.2969	7.54		8,0	91,0	53,0	43,0	36,0	55014	54814
7,6 mm	0.2992			8,0	91,0	53,0	43,0	36,0	65046	64846
7,7 mm	0.3031			8,0	91,0	53,0	43,0	36,0	65047	64847
7,8 mm	0.3071		M9 X 1,25	8,0	91,0	53,0	43,0	36,0	65048	64848
7,9 mm	0.3110			8,0	91,0	53,0	43,0	36,0	65049	64849
5/16	0.3125	7.94	3/8-16	8,0	91,0	53,0	43,0	36,0	55015	54815
8,0 mm	0.3150		M9 X 1	8,0	91,0	53,0	43,0	36,0	65050	64850
8,1 mm	0.3189			10,0	103,0	61,0	49,0	40,0	65051	64851
8,2 mm	0.3228			10,0	103,0	61,0	49,0	40,0	65052	64852
8,3 mm	0.3268			10,0	103,0	61,0	49,0	40,0	65053	64853
21/64	0.3281	8.33	3/8-20	10,0	103,0	61,0	49,0	40,0	55016	54816
8,4 mm	0.3307			10,0	103,0	61,0	49,0	40,0	65054	64854
Q	0.3320	8.43	3/8-24	10,0	103,0	61,0	49,0	40,0	55017	54817
8,5 mm	0.3346		M10 X 1,5	10,0	103,0	61,0	49,0	40,0	65055	64855
8,6 mm	0.3386			10,0	103,0	61,0	49,0	40,0	65056	64856
8,7 mm	0.3425			10,0	103,0	61,0	49,0	40,0	65057	64857
11/32	0.3438	8.73	3/8-32	10,0	103,0	61,0	49,0	40,0	55018	54818
8,8 mm	0.3465		M10 X 1,25	10,0	103,0	61,0	49,0	40,0	65058	64858
8,9 mm	0.3504			10,0	103,0	61,0	49,0	40,0	65059	64859
9,0 mm	0.3543		M10 X 1	10,0	103,0	61,0	49,0	40,0	65060	64860
9,1 mm	0.3583			10,0	103,0	61,0	49,0	40,0	65061	64861

continued on next page



5xD

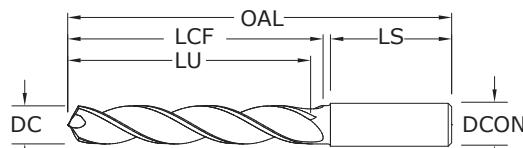

131N 5xD

FRACTIONAL & METRIC SERIES

- Triple margin design improves hole stability and size control while providing superior finish, roundness and cylindricity
- Self-stabilizing pyramid point design stabilizes the drill on contact with the workpiece
- Open flute structure efficiently transports chips while maintaining strength at high feed rates
- Sculpted gash allows chips to easily flow away from the drill center
- Recommended for materials \leq 175 Bhn (\leq 16 HRc)

CUTTING DIAMETER DECIMAL EQUIV.	METRIC EQUIV.	TAP SIZE REFERENCE ONLY	inch & mm					EDP NO.	
			SHANK DIAMETER DCON	OVERALL OAL	FLUTE LENGTH LCF	CLEARED SHANK LENGTH LU	SHANK LENGTH LS	UNCOATED Ti-NAMITE-B (TiB ₂)	EDP NO.
23/64	0.3594	9.13		10,0	103,0	61,0	49,0	40,0	55019 54819
9,2 mm	0.3622	M10 X 0,75		10,0	103,0	61,0	49,0	40,0	65062 64862
9,3 mm	0.3661			10,0	103,0	61,0	49,0	40,0	65063 64863
U	0.3680	9.35	7/16-14	10,0	103,0	61,0	49,0	40,0	55020 54820
9,4 mm	0.3701			10,0	103,0	61,0	49,0	40,0	65064 64864
9,5 mm	0.3740		M11 / M10 X 0,5	10,0	103,0	61,0	49,0	40,0	65065 64865
3/8	0.3750	9.53		10,0	103,0	61,0	49,0	40,0	55021 54821
9,6 mm	0.3780			10,0	103,0	61,0	49,0	40,0	65066 64866
9,7 mm	0.3819			10,0	103,0	61,0	49,0	40,0	65067 64867
9,8 mm	0.3858			10,0	103,0	61,0	49,0	40,0	65068 64868
9,9 mm	0.3898			10,0	103,0	61,0	49,0	40,0	65069 64869
25/64	0.3906	9.92	7/16-20	10,0	103,0	61,0	49,0	40,0	55022 54822
10,0 mm	0.3937			10,0	103,0	61,0	49,0	40,0	65070 64870
10,1 mm	0.3976			12,0	118,0	71,0	56,0	45,0	65071 64871
10,2 mm	0.4016		M12 X 1,75	12,0	118,0	71,0	56,0	45,0	65072 64872
10,3 mm	0.4055			12,0	118,0	71,0	56,0	45,0	65073 64873
13/32	0.4062	10.32		12,0	118,0	71,0	56,0	45,0	55023 54823
10,4 mm	0.4094			12,0	118,0	71,0	56,0	45,0	65074 64874
10,5 mm	0.4134		M12 X 1,5	12,0	118,0	71,0	56,0	45,0	65075 64875
10,6 mm	0.4173			12,0	118,0	71,0	56,0	45,0	65076 64876
10,7 mm	0.4213			12,0	118,0	71,0	56,0	45,0	65077 64877
27/64	0.4219	10.72	1/2-13	12,0	118,0	71,0	56,0	45,0	55024 54824
10,8 mm	0.4252		M12 X 1,25	12,0	118,0	71,0	56,0	45,0	65078 64878
10,9 mm	0.4291			12,0	118,0	71,0	56,0	45,0	65079 64879
11,0 mm	0.4331		M12 X 1	12,0	118,0	71,0	56,0	45,0	65080 64880
11,1 mm	0.4370			12,0	118,0	71,0	56,0	45,0	65081 64881
7/16	0.4375	11.11	1/4-18NPT	12,0	118,0	71,0	56,0	45,0	55025 54825
11,2 mm	0.4409			12,0	118,0	71,0	56,0	45,0	65082 64882
11,3 mm	0.4449			12,0	118,0	71,0	56,0	45,0	65083 64883
11,4 mm	0.4488			12,0	118,0	71,0	56,0	45,0	65084 64884
11,5 mm	0.4528		M12 X 0,5	12,0	118,0	71,0	56,0	45,0	65085 64885
11,6 mm	0.4567			12,0	118,0	71,0	56,0	45,0	65086 64886
11,7 mm	0.4606			12,0	118,0	71,0	56,0	45,0	65087 64887
11,8 mm	0.4646			12,0	118,0	71,0	56,0	45,0	65088 64888

continued on next page

TOLERANCES (inch) **\leq .1181 DIAMETER**

DC = +.00008/+,.00047

DCON = h₆**.1181–.2362 DIAMETER**

DC = +.00016/+,.00063

DCON = h₆**>.2362–.3937 DIAMETER**

DC = +.00024/+,.00083

DCON = h₆**>.3937–.7087 DIAMETER**

DC = +.00028/+,.00098

DCON = h₆**>.7087–1.1811 DIAMETER**

DC = +.00031/+,.00114

DCON = h₆**TOLERANCES (mm)** **\leq 3 DIAMETER**

DC = +.0002/+,.0012

DCON = h₆**>3–6 DIAMETER**

DC = +.00044/+,.0016

DCON = h₆**>6–10 DIAMETER**

DC = +.00064/+,.0021

DCON = h₆**>10–18 DIAMETER**

DC = +.00074/+,.0025

DCON = h₆**NON-FERROUS****PLASTICS/COMPOSITES**

For patent
information visit
www.ksptpatents.com



FRACTIONAL & METRIC

Hi-PerCarb®**131N 5xD**

FRACTIONAL & METRIC SERIES

CUTTING DIAMETER DC	DECIMAL EQUIV. 0.4685	METRIC EQUIV. 11.9 mm	inch & mm						EDP NO.	CONTINUED
			TAP SIZE REFERENCE ONLY	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS		
15/32	0.4688	11.91	1/2-28	12,0	118,0	71,0	56,0	45,0	65089	64889
12,0 mm	0.4724		M14 X 2	12,0	118,0	71,0	56,0	45,0	55026	54826
31/64	0.4844	12.30	9/16-12	14,0	124,0	77,0	60,0	45,0	55027	54827
12,5 mm	0.4921		M14 X 1,5	14,0	124,0	77,0	60,0	45,0	65091	64891
1/2	0.5000	12.70		14,0	124,0	77,0	60,0	45,0	55028	54828
12,8 mm	0.5039		M14 X 1,25	14,0	124,0	77,0	60,0	45,0	65092	64892
13,0 mm	0.5118		M14 X 1	14,0	124,0	77,0	60,0	45,0	65093	64893
33/64	0.5156	13.10	9/16-18	14,0	124,0	77,0	60,0	45,0	55029	54829
13,5 mm	0.5315		5/8-11	14,0	124,0	77,0	60,0	45,0	65094	64894
13,8 mm	0.5433			14,0	124,0	77,0	60,0	45,0	65095	64895
14,0 mm	0.5512		M16 X 2	14,0	124,0	77,0	60,0	45,0	65096	64896
9/16	0.5625	14.29		16,0	133,0	83,0	63,0	48,0	55030	54830
14,5 mm	0.5709		M16 X 1,5	16,0	133,0	83,0	63,0	48,0	65097	64897
37/64	0.5781	14.68	5/8-18	16,0	133,0	83,0	63,0	48,0	55031	54831
14,8 mm	0.5827			16,0	133,0	83,0	63,0	48,0	65098	64898
15,0 mm	0.5906		M16 X 1	16,0	133,0	83,0	63,0	48,0	65099	64899
15,5 mm	0.6102		M18 X 2,5	16,0	133,0	83,0	63,0	48,0	65100	64900
15,8 mm	0.6220			16,0	133,0	83,0	63,0	48,0	65101	64901
5/8	0.6250	15.88	11/16-16	16,0	133,0	83,0	63,0	48,0	55032	54832
16,0 mm	0.6299			16,0	133,0	83,0	63,0	48,0	65102	64902
21/32	0.6562	16.67	3/4-10	18,0	143,0	93,0	71,0	48,0	55033	54833
11/16	0.6875	17.46	3/4-16	18,0	143,0	93,0	71,0	48,0	55034	54834
3/4	0.7500	19.05	13/16-16	20,0	153,0	101,0	77,0	50,0	55035	54835

FRACTIONAL

Hi-PerCarb®

Series 131N 3D & 5D Fractional		Hardness	Vc (sfm)	DC • in							
				1/8	3/16	1/4	3/8	1/2	5/8	3/4	
N	ALUMINUM ALLOYS < 12% Si 6061, 2024, 7075	≤ 150 Bhn or ≤ 7 HRc	800 (640-960)	RPM	24448	16299	12224	8149	6112	4890	4075
				Fr	0.0055	0.0083	0.0110	0.0166	0.0221	0.0276	0.0331
				Feed (ipm)	135	135	135	135	135	135	135
N	ALUMINUM ALLOYS > 12% Si A356.0, 390.0, 319.0	≤ 125 Bhn or ≤ 77 HRb	600 (480-720)	RPM	18336	12224	9168	6112	4584	3667	3056
				Fr	0.0055	0.0082	0.0109	0.0164	0.0218	0.0273	0.0327
				Feed (ipm)	100	100	100	100	100	100	100
N	COPPER ALLOYS Alum Bronze, Muntz Brass, Navel Brass	≤ 175 Bhn or ≤ 16 HRc	550 (440-660)	RPM	16808	11205	8404	5603	4202	3362	2801
				Fr	0.0020	0.0030	0.0040	0.0061	0.0081	0.0101	0.0121
				Feed (ipm)	34	34	34	34	34	34	34
N	PLASTICS Acrylic, PVC, Polypropylene		450 (360-540)	RPM	13752	9168	6876	4584	3438	2750	2292
				Fr	0.0025	0.0037	0.0049	0.0074	0.0099	0.0124	0.0148
				Feed (ipm)	34	34	34	34	34	34	34

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = Vc x 3.82 / DC

ipm = Fr x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Series 131N 3D & 5D Metric		Hardness	Vc (m/min)	DC • mm							
				3	6	8	10	12	14	16	
N	ALUMINUM ALLOYS <12% Si 6061, 2024, 7075	≤ 150 Bhn or ≤ 7 HRc	244 (195-293)	RPM	25851	12926	9694	7755	6463	5540	4847
				Fr	0.133	0.265	0.354	0.442	0.531	0.619	0.708
				Feed (mm/min)	3430	3430	3430	3430	3430	3430	3430
N	ALUMINUM ALLOYS >12% Si A356.0, 390.0, 319.0	≤ 125 Bhn or ≤ 77 HRb	183 (146-219)	RPM	19388	9694	7271	5816	4847	4155	3635
				Fr	0.131	0.262	0.349	0.437	0.524	0.611	0.699
				Feed (mm/min)	2540	2540	2540	2540	2540	2540	2540
N	COPPER ALLOYS Alum Bronze, Muntz Brass, Navel Brass	≤ 175 Bhn or ≤ 16 HRc	168 (134-201)	RPM	17773	8886	6665	5332	4443	3808	3332
				Fr	0.049	0.097	0.130	0.162	0.194	0.227	0.259
				Feed (mm/min)	864	864	864	864	864	864	864
N	PLASTICS Acrylic, PVC, Polypropylene		137 (110-165)	RPM	14541	7271	5453	4362	3635	3116	2726
				Fr	0.059	0.119	0.158	0.198	0.238	0.277	0.317
				Feed (mm/min)	864	864	864	864	864	864	864

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fr x rpm

reduce speed and feed for materials harder than listed


refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



5xD



124°

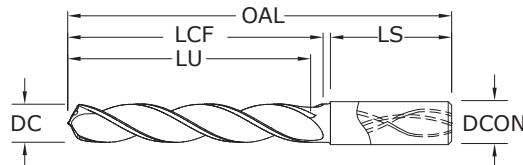

141K 5xD

FRACTIONAL & METRIC SERIES

- Triple margin design improves hole stability and size control while providing superior finish, roundness and cylindricity
- Self-stabilizing pyramid point design stabilizes the drill on contact with the workpiece
- Open flute structure efficiently transports chips while maintaining strength at high feed rates
- Sculpted gash allows chips to easily flow away from the drill center
- Recommended for materials ≤ 400 Bhn (≤ 43 HRc)

CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	TAP SIZE REFERENCE ONLY	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS	inch & mm		EDP NO.
									Ti-NAMITE-M (TM)		
3,0 mm	0.1181			6,0	66,0	28,0	23,0	36,0			65160
3,1 mm	0.1220			6,0	66,0	28,0	23,0	36,0			65161
1/8	0.1250	3.18		6,0	66,0	28,0	23,0	36,0			55160
3,2 mm	0.1260		M3,5 X 0,35	6,0	66,0	28,0	23,0	36,0			65162
3,3 mm	0.1299		M4 X 0,7	6,0	66,0	28,0	23,0	36,0			65163
3,4 mm	0.1339			6,0	66,0	28,0	23,0	36,0			65164
#29	0.1360	3.45	8-32,8-36	6,0	66,0	28,0	23,0	36,0			55161
3,5 mm	0.1378		M4 X 0,5	6,0	66,0	28,0	23,0	36,0			65165
9/64	0.1406	3.57		6,0	66,0	28,0	23,0	36,0			55162
3,6 mm	0.1417		M4 X 0,35	6,0	66,0	28,0	23,0	36,0			65166
3,7 mm	0.1457		M4,5 X 0,75	6,0	66,0	28,0	23,0	36,0			65167
3,8 mm	0.1496		10-24	6,0	74,0	36,0	29,0	36,0			65168
3,9 mm	0.1535			6,0	74,0	36,0	29,0	36,0			65169
5/32	0.1562	3.97		6,0	74,0	36,0	29,0	36,0			55163
4,0 mm	0.1575		M4,5 X 0,5	6,0	74,0	36,0	29,0	36,0			65170
#21	0.1590	4.04	10-32	6,0	74,0	36,0	29,0	36,0			55164
4,1 mm	0.1614			6,0	74,0	36,0	29,0	36,0			65171
4,2 mm	0.1654		M5 / M5 x 0,75	6,0	74,0	36,0	29,0	36,0			65172
4,3 mm	0.1693			6,0	74,0	36,0	29,0	36,0			65173
11/64	0.1719	4.37		6,0	74,0	36,0	29,0	36,0			55165
4,4 mm	0.1732		12-24	6,0	74,0	36,0	29,0	36,0			65174
4,5 mm	0.1772		M5 X 0,5	6,0	74,0	36,0	29,0	36,0			65175
4,6 mm	0.1811		12-28	6,0	74,0	36,0	29,0	36,0			65176
4,7 mm	0.1850		12-32	6,0	74,0	36,0	29,0	36,0			65177
3/16	0.1875	4.76		6,0	82,0	44,0	35,0	36,0			55166
4,8 mm	0.1890		7/32-32	6,0	82,0	44,0	35,0	36,0			65178
4,9 mm	0.1929			6,0	82,0	44,0	35,0	36,0			65179
5,0 mm	0.1969		M6 X 1	6,0	82,0	44,0	35,0	36,0			65180
5,1 mm	0.2008		1/4-20	6,0	82,0	44,0	35,0	36,0			65181
13/64	0.2031	5.16		6,0	82,0	44,0	35,0	36,0			55167
5,2 mm	0.2047		M6 X 0,75	6,0	82,0	44,0	35,0	36,0			65182
5,3 mm	0.2087			6,0	82,0	44,0	35,0	36,0			65183
5,4 mm	0.2126			6,0	82,0	44,0	35,0	36,0			65184
5,5 mm	0.2165		M6 X 0,5	6,0	82,0	44,0	35,0	36,0			65185
7/32	0.2188	5.56	1/4-32	6,0	82,0	44,0	35,0	36,0			55168
5,6 mm	0.2205			6,0	82,0	44,0	35,0	36,0			65186

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+,.00047

DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+,.00063

DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+,.00083

DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+,.00098

DCON = h₆

>.7087-.11811 DIAMETER

DC = +.00031/+,.00114

DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012

DCON = h₆

>3-6 DIAMETER

DC = +0,004/+0,016

DCON = h₆

>6-10 DIAMETER

DC = +0,006/+0,021

DCON = h₆

>10-18 DIAMETER

DC = +0,007/+0,025

DCON = h₆

CAST IRON

For patent information visit
www.ksptpatents.com



**141K 5xD**

FRACTIONAL & METRIC SERIES

CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	TAP SIZE REFERENCE ONLY	inch & mm					EDP NO. Ti-NAMITE-M (TM)
				SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS	
5,7 mm	0.2244			6,0	82,0	44,0	35,0	36,0	65187
5,8 mm	0.2283			6,0	82,0	44,0	35,0	36,0	65188
5,9 mm	0.2323			6,0	82,0	44,0	35,0	36,0	65189
15/64	0.2344	5.95		6,0	82,0	44,0	35,0	36,0	55169
6,0 mm	0.2362		M7 X 1	6,0	82,0	44,0	35,0	36,0	65190
6,1 mm	0.2402			8,0	91,0	53,0	43,0	36,0	65191
6,2 mm	0.2441		M7 X 0,75	8,0	91,0	53,0	43,0	36,0	65192
6,3 mm	0.2480			8,0	91,0	53,0	43,0	36,0	65193
1/4	0.2500	6.35		8,0	91,0	53,0	43,0	36,0	55170
6,4 mm	0.2520			8,0	91,0	53,0	43,0	36,0	65194
6,5 mm	0.2559			8,0	91,0	53,0	43,0	36,0	65195
F	0.2570	6.53	5/16-18	8,0	91,0	53,0	43,0	36,0	55171
6,6 mm	0.2598			8,0	91,0	53,0	43,0	36,0	65196
6,7 mm	0.2638			8,0	91,0	53,0	43,0	36,0	65197
17/64	0.2656	6.75	5/16-20	8,0	91,0	53,0	43,0	36,0	55172
6,8 mm	0.2677		M8 X 1,25	8,0	91,0	53,0	43,0	36,0	65198
6,9 mm	0.2717		5/16-24	8,0	91,0	53,0	43,0	36,0	65199
7,0 mm	0.2756		M8 X 1	8,0	91,0	53,0	43,0	36,0	65200
7,1 mm	0.2795			8,0	91,0	53,0	43,0	36,0	65201
9/32	0.2812	7.14	5/16-32	8,0	91,0	53,0	43,0	36,0	55173
7,2 mm	0.2835		M8 X 0,75	8,0	91,0	53,0	43,0	36,0	65202
7,3 mm	0.2874			8,0	91,0	53,0	43,0	36,0	65203
7,4 mm	0.2913			8,0	91,0	53,0	43,0	36,0	65204
7,5 mm	0.2953		M8 X 0,5	8,0	91,0	53,0	43,0	36,0	65205
19/64	0.2969	7.54		8,0	91,0	53,0	43,0	36,0	55174
7,6 mm	0.2992			8,0	91,0	53,0	43,0	36,0	65206
7,7 mm	0.3031			8,0	91,0	53,0	43,0	36,0	65207
7,8 mm	0.3071		M9 X 1,25	8,0	91,0	53,0	43,0	36,0	65208
7,9 mm	0.3110			8,0	91,0	53,0	43,0	36,0	65209
5/16	0.3125	7.94	3/8-16	8,0	91,0	53,0	43,0	36,0	55175
8,0 mm	0.3150		M9 X 1	8,0	91,0	53,0	43,0	36,0	65210
8,1 mm	0.3189			10,0	103,0	61,0	49,0	40,0	65211
8,2 mm	0.3228			10,0	103,0	61,0	49,0	40,0	65212
8,3 mm	0.3268			10,0	103,0	61,0	49,0	40,0	65213
21/64	0.3281	8.33	3/8-20	10,0	103,0	61,0	49,0	40,0	55176
8,4 mm	0.3307			10,0	103,0	61,0	49,0	40,0	65214
Q	0.3320	8.43	3/8-24	10,0	103,0	61,0	49,0	40,0	55177
8,5 mm	0.3346		M10 X 1,5	10,0	103,0	61,0	49,0	40,0	65215
8,6 mm	0.3386			10,0	103,0	61,0	49,0	40,0	65216
8,7 mm	0.3425			10,0	103,0	61,0	49,0	40,0	65217
11/32	0.3438	8.73	3/8-32	10,0	103,0	61,0	49,0	40,0	55178
8,8 mm	0.3465		M10 X 1,25	10,0	103,0	61,0	49,0	40,0	65218
8,9 mm	0.3504			10,0	103,0	61,0	49,0	40,0	65219
9,0 mm	0.3543		M10 X 1	10,0	103,0	61,0	49,0	40,0	65220
9,1 mm	0.3583			10,0	103,0	61,0	49,0	40,0	65221
23/64	0.3594	9.13		10,0	103,0	61,0	49,0	40,0	55179

CONTINUED

continued on next page

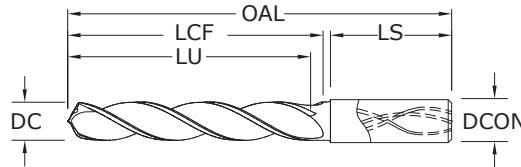

141K 5xD

FRACTIONAL & METRIC SERIES

- Triple margin design improves hole stability and size control while providing superior finish, roundness and cylindricity
- Self-stabilizing pyramid point design stabilizes the drill on contact with the workpiece
- Open flute structure efficiently transports chips while maintaining strength at high feed rates
- Sculpted gash allows chips to easily flow away from the drill center
- Recommended for materials ≤ 400 Bhn (≤ 43 HRc)

inch & mm										EDP NO.
CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	TAP SIZE REFERENCE ONLY	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS	Ti-NAMITE-M (TM)	
9,2 mm	0,3622		M10 X 0,75	10,0	103,0	61,0	49,0	40,0	65222	
9,3 mm	0,3661			10,0	103,0	61,0	49,0	40,0	65223	
U	0,3680	9,35	7/16-14	10,0	103,0	61,0	49,0	40,0	55180	
9,4 mm	0,3701			10,0	103,0	61,0	49,0	40,0	65224	
9,5 mm	0,3740		M11 / M10 X 0,5	10,0	103,0	61,0	49,0	40,0	65225	
3/8	0,3750	9,53		10,0	103,0	61,0	49,0	40,0	55181	
9,6 mm	0,3780			10,0	103,0	61,0	49,0	40,0	65226	
9,7 mm	0,3819			10,0	103,0	61,0	49,0	40,0	65227	
9,8 mm	0,3858			10,0	103,0	61,0	49,0	40,0	65228	
9,9 mm	0,3898			10,0	103,0	61,0	49,0	40,0	65229	
25/64	0,3906	9,92	7/16-20	10,0	103,0	61,0	49,0	40,0	55182	
10,0 mm	0,3937			10,0	103,0	61,0	49,0	40,0	65230	
10,1 mm	0,3976			12,0	118,0	71,0	56,0	45,0	65231	
10,2 mm	0,4016		M12 X 1,75	12,0	118,0	71,0	56,0	45,0	65232	
10,3 mm	0,4055			12,0	118,0	71,0	56,0	45,0	65233	
13/32	0,4062	10,32		12,0	118,0	71,0	56,0	45,0	55183	
10,4 mm	0,4094			12,0	118,0	71,0	56,0	45,0	65234	
10,5 mm	0,4134		M12 X 1,5	12,0	118,0	71,0	56,0	45,0	65235	
10,6 mm	0,4173			12,0	118,0	71,0	56,0	45,0	65236	
10,7 mm	0,4213			12,0	118,0	71,0	56,0	45,0	65237	
27/64	0,4219	10,72	1/2-13	12,0	118,0	71,0	56,0	45,0	55184	
10,8 mm	0,4252		M12 X 1,25	12,0	118,0	71,0	56,0	45,0	65238	
10,9 mm	0,4291			12,0	118,0	71,0	56,0	45,0	65239	
11,0 mm	0,4331		M12 X 1	12,0	118,0	71,0	56,0	45,0	65240	
11,1 mm	0,4370			12,0	118,0	71,0	56,0	45,0	65241	
7/16	0,4375	11,11	1/4-18NPT	12,0	118,0	71,0	56,0	45,0	55185	
11,2 mm	0,4409			12,0	118,0	71,0	56,0	45,0	65242	
11,3 mm	0,4449			12,0	118,0	71,0	56,0	45,0	65243	
11,4 mm	0,4488			12,0	118,0	71,0	56,0	45,0	65244	
11,5 mm	0,4528		M12 X 0,5	12,0	118,0	71,0	56,0	45,0	65245	
11,6 mm	0,4567			12,0	118,0	71,0	56,0	45,0	65246	
11,7 mm	0,4606			12,0	118,0	71,0	56,0	45,0	65247	
11,8 mm	0,4646			12,0	118,0	71,0	56,0	45,0	65248	
11,9 mm	0,4685			12,0	118,0	71,0	56,0	45,0	65249	
15/32	0,4688	11,91	1/2-28	12,0	118,0	71,0	56,0	45,0	55186	
12,0 mm	0,4724		M14 X 2	12,0	118,0	71,0	56,0	45,0	65250	

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+,.00047

DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+,.00063

DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+,.00083

DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+,.00098

DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+,.00114

DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012

DCON = h₆

>3-6 DIAMETER

DC = +0,004/+0,016

DCON = h₆

>6-10 DIAMETER

DC = +0,006/+0,021

DCON = h₆

>10-18 DIAMETER

DC = +0,007/+0,025

DCON = h₆

CAST IRON

For patent information visit
www.ksptpatents.com



FRACTIONAL & METRIC
Hi-PerCarb®

141K 5xD

FRACTIONAL & METRIC SERIES

CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	TAP SIZE REFERENCE ONLY	inch & mm					EDP NO. Ti-NAMITE-M (TM)
				SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS	
31/64	0.4844	12.30	9/16-12	14,0	124,0	77,0	60,0	45,0	55187
12,5 mm	0.4921		M14 X 1,5	14,0	124,0	77,0	60,0	45,0	65251
1/2	0.5000	12.70		14,0	124,0	77,0	60,0	45,0	55188
12,8 mm	0.5039		M14 X 1,25	14,0	124,0	77,0	60,0	45,0	65252
13,0 mm	0.5118		M14 X 1	14,0	124,0	77,0	60,0	45,0	65253
33/64	0.5156	13.10	9/16-18	14,0	124,0	77,0	60,0	45,0	55189
13,5 mm	0.5315		5/8-11	14,0	124,0	77,0	60,0	45,0	65254
13,8 mm	0.5433			14,0	124,0	77,0	60,0	45,0	65255
14,0 mm	0.5512		M16 X 2	14,0	124,0	77,0	60,0	45,0	65256
9/16	0.5625	14.29		16,0	133,0	83,0	63,0	48,0	55190
14,5 mm	0.5709		M16 X 1,5	16,0	133,0	83,0	63,0	48,0	65257
37/64	0.5781	14.68	5/8-18	16,0	133,0	83,0	63,0	48,0	55191
14,8 mm	0.5827			16,0	133,0	83,0	63,0	48,0	65258
15,0 mm	0.5906		M16 X 1	16,0	133,0	83,0	63,0	48,0	65259
15,5 mm	0.6102		M18 X 2,5	16,0	133,0	83,0	63,0	48,0	65260
15,8 mm	0.6220			16,0	133,0	83,0	63,0	48,0	65261
5/8	0.6250	15.88	11/16-16	16,0	133,0	83,0	63,0	48,0	55192
16,0 mm	0.6299			16,0	133,0	83,0	63,0	48,0	65262
21/32	0.6562	16.67	3/4-10	18,0	143,0	93,0	71,0	48,0	55193
11/16	0.6875	17.46	3/4-16	18,0	143,0	93,0	71,0	48,0	55194
3/4	0.7500	19.05	13/16-16	20,0	153,0	101,0	77,0	50,0	55195

CONTINUED

FRACTIONAL

Hi-PerCarb®

Series 141K 5D Fractional	Hardness	Vc (sfm)	DC • in								
			1/8	3/16	1/4	3/8	1/2	5/8	3/4		
K	GRAY CAST IRON FERRITIC ASTM A48: CLASS 20 SAE J431C: GRADE 1800	≤ 150 Bhn or ≤ 80 HRb (360-540)	450	RPM	13752	9168	6876	4584	3438	2750	2292
				Fr	0.0049	0.0074	0.0099	0.0148	0.0198	0.0247	0.0297
				Feed (ipm)	68	68	68	68	68	68	68
	GRAY CAST IRON PEARLITIC ASTM A48: CLASS 30, 35, 40 SAE J431C: GRADE 3000	≤ 220 Bhn or ≤ 19 HRc (300-450)	375	RPM	11460	7640	5730	3820	2865	2292	1910
				Fr	0.0039	0.0059	0.0079	0.0118	0.0157	0.0196	0.0236
				Feed (ipm)	45	45	45	45	45	45	45
COMPACTED GRAPHITE IRON	≤ 250 Bhn or ≤ 25 HRc (260-390)	325	RPM	9932	6621	4966	3311	2483	1986	1655	
				Fr	0.0039	0.0059	0.0079	0.0118	0.0157	0.0196	0.0236
				Feed (ipm)	39	39	39	39	39	39	39
MALLEABLE CAST IRON FERRITIC ASTM A220: GRADE 40010 SAE J158: GRADE M4504	≤ 160 Bhn or ≤ 3 HRc (360-540)	450	RPM	13752	9168	6876	4584	3438	2750	2292	
				Fr	0.0049	0.0074	0.0099	0.0148	0.0198	0.0247	0.0297
				Feed (ipm)	68	68	68	68	68	68	68
MALLEABLE CAST IRON MARTENSITE ASTM A220: GRADE 90001 SAE J158: GRADE M8501	≤ 320 Bhn or ≤ 34 HRc (200-300)	250	RPM	7640	5093	3820	2547	1910	1528	1273	
				Fr	0.0031	0.0047	0.0063	0.0094	0.0126	0.0157	0.0188
				Feed (ipm)	24	24	24	24	24	24	24

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = Vc x 3.82 / DC

ipm = Fr x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Series 141K 5D Metric	Hardness	Vc (m/min)	DC • mm							
			3	6	8	10	12	14	16	
K	GRAY CAST IRON FERRITIC ASTM A48: CLASS 20 SAE J431C: GRADE 1800	≤ 150 Bhn or ≤ 80 HRb	137 (110-165)	RPM Fr Feed (mm/min)	14541 0.119 1725	7271 0.237 1725	5453 0.316 1725	4362 0.395 1725	3635 0.475 1725	3116 0.554 1725
	GRAY CAST IRON PEARLITIC ASTM A48: CLASS 30, 35, 40 SAE J431C: GRADE 3000	≤ 220 Bhn or ≤ 19 HRc	114 (91-137)	RPM Fr Feed (mm/min)	12118 0.094 1145	6059 0.189 1145	4544 0.252 1145	3635 0.315 1145	3029 0.378 1145	2597 0.441 1145
	COMPACTED GRAPHITE IRON	≤ 250 Bhn or ≤ 25 HRc	99 (79-119)	RPM Fr Feed (mm/min)	10502 0.094 990	5251 0.189 990	3938 0.251 990	3151 0.314 990	2626 0.377 990	2250 0.440 990
	MALLEABLE CAST IRON FERRITIC ASTM A220: GRADE 40010 SAE J158: GRADE M4504	≤ 160 Bhn or ≤ 3 HRc	137 (110-165)	RPM Fr Feed (mm/min)	14541 0.119 1725	7271 0.237 1725	5453 0.316 1725	4362 0.395 1725	3635 0.475 1725	3116 0.554 1725
	MALLEABLE CAST IRON MARTENSITE ASTM A220: GRADE 90001 SAE J158: GRADE M8501	≤ 320 Bhn or ≤ 34 HRc	76 (61-91)	RPM Fr Feed (mm/min)	8078 0.076 610	4039 0.151 610	3029 0.201 610	2424 0.252 610	2020 0.302 610	1731 0.352 610

(Brinell) HRc (Rockwell C) HRB (Rockwell B)

rpm = (Vc x 1000) / (DC x 3.14)


mm/min = Fr x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



5xD

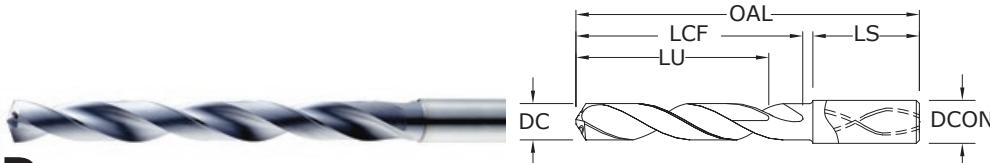**140 5xD**

FRACTIONAL & METRIC SERIES

- Coolant through design promotes controlled and consistent operating temperatures improving coolant flow to the cut while maintaining strength
- Split point geometry for improved drill penetration and accuracy
- Controlled edge honing for longevity
- Negative corner position strengthens and protects
- Recommended for materials ≤ 60 HRc (≤ 654 Bhn)

inch & mm									EDP NO.
CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	TAP SIZE REFERENCE ONLY	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS	Ti-NAMITE-A (AlTiN)
3,0 mm	0.1181			6,0	66,0	28,0	23,0	36,0	63901
3,1 mm	0.1220			6,0	66,0	28,0	23,0	36,0	63902
1/8	0.1250	3.18		6,0	66,0	28,0	23,0	36,0	51901
3,2 mm	0.1260		M3,5 X 0,35	6,0	66,0	28,0	23,0	36,0	63903
3,3 mm	0.1299		M4 X 0,7	6,0	66,0	28,0	23,0	36,0	63904
3,4 mm	0.1339			6,0	66,0	28,0	23,0	36,0	63905
#29	0.1360	3.45	8-32,8-36	6,0	66,0	28,0	23,0	36,0	51902
3,5 mm	0.1378		M4 X 0,5	6,0	66,0	28,0	23,0	36,0	63906
9/64	0.1406	3.57		6,0	66,0	28,0	23,0	36,0	51903
3,6 mm	0.1417		M4 X 0,35	6,0	66,0	28,0	23,0	36,0	63907
3,7 mm	0.1457		M4,5 X 0,75	6,0	66,0	28,0	23,0	36,0	63908
3,8 mm	0.1496		10-24	6,0	74,0	36,0	29,0	36,0	51904
3,9 mm	0.1535			6,0	74,0	36,0	29,0	36,0	63909
5/32	0.1562	3.97		6,0	74,0	36,0	29,0	36,0	51905
4,0 mm	0.1575		M4,5 X 0,5	6,0	74,0	36,0	29,0	36,0	63910
#21	0.1590	4.04	10-32	6,0	74,0	36,0	29,0	36,0	51906
4,1 mm	0.1614			6,0	74,0	36,0	29,0	36,0	63911
4,2 mm	0.1654		M5 / M5 x 0,75	6,0	74,0	36,0	29,0	36,0	63912
4,3 mm	0.1693			6,0	74,0	36,0	29,0	36,0	63913
11/64	0.1719	4.37		6,0	74,0	36,0	29,0	36,0	51907
4,4 mm	0.1732		12-24	6,0	74,0	36,0	29,0	36,0	63914
4,5 mm	0.1772		M5 X 0,5	6,0	74,0	36,0	29,0	36,0	63915
4,6 mm	0.1811		12-28	6,0	74,0	36,0	29,0	36,0	63916
4,7 mm	0.1850		12-32	6,0	74,0	36,0	29,0	36,0	63917
3/16	0.1875	4.76		6,0	82,0	44,0	35,0	36,0	51908
4,8 mm	0.1890		7/32-32	6,0	82,0	44,0	35,0	36,0	63918
4,9 mm	0.1929			6,0	82,0	44,0	35,0	36,0	63919
5,0 mm	0.1969		M6 X 1	6,0	82,0	44,0	35,0	36,0	63920
5,1 mm	0.2008		1/4-20	6,0	82,0	44,0	35,0	36,0	63900
13/64	0.2031	5.16		6,0	82,0	44,0	35,0	36,0	51910
5,2 mm	0.2047		M6 X 0,75	6,0	82,0	44,0	35,0	36,0	63921
5,3 mm	0.2087			6,0	82,0	44,0	35,0	36,0	63922
5,4 mm	0.2126			6,0	82,0	44,0	35,0	36,0	63998
5,5 mm	0.2165		M6 X 0,5	6,0	82,0	44,0	35,0	36,0	63923

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+,.00047

DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+,.00063

DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+,.00083

DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+,.00098

DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+,.00114

DCON = h₆**TOLERANCES (mm)**

≤3 DIAMETER

DC = +0,002/+0,012

DCON = h₆

>3-6 DIAMETER

DC = +0,004/+0,016

DCON = h₆

>6-10 DIAMETER

DC = +0,006/+0,021

DCON = h₆

>10-18 DIAMETER

DC = +0,007/+0,025

DCON = h₆

STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

TITANIUM

NON-FERROUS

HARDENED STEELS


For patent information visit
www.ksptpatents.com

**140 5xD**

FRACTIONAL & METRIC SERIES

CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	TAP SIZE REFERENCE ONLY	inch & mm					EDP NO. Ti-NAMITE-A (AITiN)	CONTINUED
				SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS		
7/32	0.2188	5.56	1/4-32	6,0	82,0	44,0	35,0	36,0	51912	
5,6 mm	0.2205			6,0	82,0	44,0	35,0	36,0	63924	
5,7 mm	0.2244			6,0	82,0	44,0	35,0	36,0	63925	
5,8 mm	0.2283			6,0	82,0	44,0	35,0	36,0	63926	
5,9 mm	0.2323			6,0	82,0	44,0	35,0	36,0	63927	
15/64	0.2344	5.95		6,0	82,0	44,0	35,0	36,0	51913	
6,0 mm	0.2362		M7 X 1	6,0	82,0	44,0	35,0	36,0	63928	
6,1 mm	0.2402			8,0	91,0	53,0	43,0	36,0	63929	
6,2 mm	0.2441		M7 X 0,75	8,0	91,0	53,0	43,0	36,0	63930	
6,3 mm	0.2480			8,0	91,0	53,0	43,0	36,0	63931	
1/4	0.2500	6.35		8,0	91,0	53,0	43,0	36,0	51914	
6,4 mm	0.2520			8,0	91,0	53,0	43,0	36,0	63932	
6,5 mm	0.2559			8,0	91,0	53,0	43,0	36,0	63933	
F	0.2570	6.53	5/16-18	8,0	91,0	53,0	43,0	36,0	51915	
6,6 mm	0.2598			8,0	91,0	53,0	43,0	36,0	63934	
6,7 mm	0.2638			8,0	91,0	53,0	43,0	36,0	63935	
17/64	0.2656	6.75	5/16-20	8,0	91,0	53,0	43,0	36,0	51916	
6,8 mm	0.2677		M8 X 1,25	8,0	91,0	53,0	43,0	36,0	63936	
6,9 mm	0.2717		5/16-24	8,0	91,0	53,0	43,0	36,0	63999	
7,0 mm	0.2756		M8 X 1	8,0	91,0	53,0	43,0	36,0	63937	
7,1 mm	0.2795			8,0	91,0	53,0	43,0	36,0	63938	
9/32	0.2812	7.14	5/16-32	8,0	91,0	53,0	43,0	36,0	51918	
7,2 mm	0.2835		M8 X 0,75	8,0	91,0	53,0	43,0	36,0	63939	
7,3 mm	0.2874			8,0	91,0	53,0	43,0	36,0	63940	
7,4 mm	0.2913			8,0	91,0	53,0	43,0	36,0	63941	
7,5 mm	0.2953		M8 X 0,5	8,0	91,0	53,0	43,0	36,0	63942	
19/64	0.2969	7.54		8,0	91,0	53,0	43,0	36,0	51919	
7,6 mm	0.2992			8,0	91,0	53,0	43,0	36,0	63943	
7,7 mm	0.3031			8,0	91,0	53,0	43,0	36,0	63944	
7,8 mm	0.3071		M9 X 1,25	8,0	91,0	53,0	43,0	36,0	63945	
7,9 mm	0.3110			8,0	91,0	53,0	43,0	36,0	63946	
5/16	0.3125	7.94	3/8-16	8,0	91,0	53,0	43,0	36,0	51920	
8,0 mm	0.3150		M9 X 1	8,0	91,0	53,0	43,0	36,0	63947	
8,1 mm	0.3189			10,0	103,0	61,0	49,0	40,0	63948	
8,2 mm	0.3228			10,0	103,0	61,0	49,0	40,0	63949	
8,3 mm	0.3268			10,0	103,0	61,0	49,0	40,0	63950	
21/64	0.3281	8.33	3/8-20	10,0	103,0	61,0	49,0	40,0	51921	
8,4 mm	0.3307			10,0	103,0	61,0	49,0	40,0	63951	
Q	0.3320	8.43	3/8-24	10,0	103,0	61,0	49,0	40,0	51922	
8,5 mm	0.3346		M10 X 1,5	10,0	103,0	61,0	49,0	40,0	63952	
8,6 mm	0.3386			10,0	103,0	61,0	49,0	40,0	63953	
8,7 mm	0.3425			10,0	103,0	61,0	49,0	40,0	63954	

continued on next page

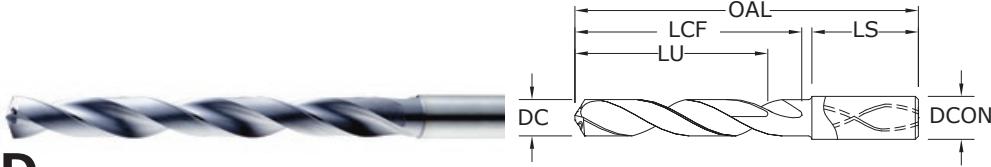**140 5xD**

FRACTIONAL & METRIC SERIES

- Coolant through design promotes controlled and consistent operating temperatures improving coolant flow to the cut while maintaining strength
- Split point geometry for improved drill penetration and accuracy
- Controlled edge honing for longevity
- Negative corner position strengthens and protects
- Recommended for materials ≤ 60 HRc (≤ 654 Bhn)

inch & mm										EDP NO.
CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	TAP SIZE REFERENCE ONLY	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS	Ti-NAMITE-A (AlTiN)	EDP NO.
11/32	0.3438	8.73	3/8-32	10,0	103,0	61,0	49,0	40,0	51923	
8,8 mm	0.3465		M10 X 1,25	10,0	103,0	61,0	49,0	40,0	63955	
8,9 mm	0.3504			10,0	103,0	61,0	49,0	40,0	63956	
9,0 mm	0.3543		M10 X 1	10,0	103,0	61,0	49,0	40,0	63957	
9,1 mm	0.3583			10,0	103,0	61,0	49,0	40,0	63958	
23/64	0.3594	9.13		10,0	103,0	61,0	49,0	40,0	51924	
9,2 mm	0.3622		M10 X 0,75	10,0	103,0	61,0	49,0	40,0	63959	
9,3 mm	0.3661			10,0	103,0	61,0	49,0	40,0	63960	
U	0.3680	9.35	7/16-14	10,0	103,0	61,0	49,0	40,0	51925	
9,4 mm	0.3701			10,0	103,0	61,0	49,0	40,0	63961	
9,5 mm	0.3740		M11 / M10 X 0,5	10,0	103,0	61,0	49,0	40,0	63962	
3/8	0.3750	9.53		10,0	103,0	61,0	49,0	40,0	51926	
9,6 mm	0.3780			10,0	103,0	61,0	49,0	40,0	63963	
9,7 mm	0.3819			10,0	103,0	61,0	49,0	40,0	63964	
9,8 mm	0.3858			10,0	103,0	61,0	49,0	40,0	63965	
9,9 mm	0.3898			10,0	103,0	61,0	49,0	40,0	63966	
25/64	0.3906	9.92	7/16-20	10,0	103,0	61,0	49,0	40,0	51927	
10,0 mm	0.3937			10,0	103,0	61,0	49,0	40,0	63967	
10,1 mm	0.3976			12,0	118,0	71,0	56,0	45,0	63968	
10,2 mm	0.4016		M12 X 1,75	12,0	118,0	71,0	56,0	45,0	63969	
10,3 mm	0.4055			12,0	118,0	71,0	56,0	45,0	63970	
13/32	0.4062	10.32		12,0	118,0	71,0	56,0	45,0	51928	
10,4 mm	0.4094			12,0	118,0	71,0	56,0	45,0	63971	
10,5 mm	0.4134		M12 X 1,5	12,0	118,0	71,0	56,0	45,0	63972	
10,6 mm	0.4173			12,0	118,0	71,0	56,0	45,0	63973	
10,7 mm	0.4213			12,0	118,0	71,0	56,0	45,0	63974	
27/64	0.4219	10.72	1/2-13	12,0	118,0	71,0	56,0	45,0	51929	
10,8 mm	0.4252		M12 X 1,25	12,0	118,0	71,0	56,0	45,0	63975	
10,9 mm	0.4291			12,0	118,0	71,0	56,0	45,0	63976	
11,0 mm	0.4331		M12 X 1	12,0	118,0	71,0	56,0	45,0	63977	
11,1 mm	0.4370			12,0	118,0	71,0	56,0	45,0	63978	
7/16	0.4375	11.11	1/4-18NPT	12,0	118,0	71,0	56,0	45,0	51930	
11,2 mm	0.4409			12,0	118,0	71,0	56,0	45,0	63979	
11,3 mm	0.4449			12,0	118,0	71,0	56,0	45,0	63980	

continued on next page

TOLERANCES (inch)**≤.1181 DIAMETER**

DC = +.00008/+,.00047

DCON = h₆**>.1181–.2362 DIAMETER**

DC = +.00016/+,.00063

DCON = h₆**>.2362–.3937 DIAMETER**

DC = +.00024/+,.00083

DCON = h₆**>.3937–.7087 DIAMETER**

DC = +.00028/+,.00098

DCON = h₆**>.7087–1.1811 DIAMETER**

DC = +.00031/+,.00114

DCON = h₆**TOLERANCES (mm)****≤3 DIAMETER**

DC = +0,002/+0,012

DCON = h₆**>3–6 DIAMETER**

DC = +0,004/+0,016

DCON = h₆**>6–10 DIAMETER**

DC = +0,006/+0,021

DCON = h₆**>10–18 DIAMETER**

DC = +0,007/+0,025

DCON = h₆**STEELS****STAINLESS STEELS****CAST IRON****HIGH TEMP ALLOYS****TITANIUM****NON-FERROUS****HARDENED STEELS**For patent information visit www.ksptpatents.com

140 5xD

FRACTIONAL & METRIC SERIES

CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	TAP SIZE REFERENCE ONLY	inch & mm					EDP NO. Ti-NAMITE-A (AITiN)	CONTINUED
				SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS		
11,4 mm	0.4488			12,0	118,0	71,0	56,0	45,0	63981	
11,5 mm	0.4528		M12 X 0,5	12,0	118,0	71,0	56,0	45,0	64000	
11,6 mm	0.4567			12,0	118,0	71,0	56,0	45,0	63982	
11,7 mm	0.4606			12,0	118,0	71,0	56,0	45,0	63983	
11,8 mm	0.4646			12,0	118,0	71,0	56,0	45,0	63984	
11,9 mm	0.4685			12,0	118,0	71,0	56,0	45,0	63985	
15/32	0.4688	11.91	1/2-28	12,0	118,0	71,0	56,0	45,0	51932	
12,0 mm	0.4724		M14 X 2	12,0	118,0	71,0	56,0	45,0	63986	
31/64	0.4844	12.30	9/16-12	14,0	124,0	77,0	60,0	45,0	51933	
12,5 mm	0.4921		M14 X 1,5	14,0	124,0	77,0	60,0	45,0	63987	
1/2	0.5000	12.70		14,0	124,0	77,0	60,0	45,0	51934	
12,8 mm	0.5039		M14 X 1,25	14,0	124,0	77,0	60,0	45,0	63988	
13,0 mm	0.5118		M14 X 1	14,0	124,0	77,0	60,0	45,0	63989	
33/64	0.5156	13.10	9/16-18	14,0	124,0	77,0	60,0	45,0	51935	
13,5 mm	0.5315		5/8-11	14,0	124,0	77,0	60,0	45,0	64001	
13,8 mm	0.5433			14,0	124,0	77,0	60,0	45,0	63990	
14,0 mm	0.5512		M16 X 2	14,0	124,0	77,0	60,0	45,0	63991	
9/16	0.5625	14.29		16,0	133,0	83,0	63,0	48,0	51937	
14,5 mm	0.5709		M16 X 1,5	16,0	133,0	83,0	63,0	48,0	63992	
37/64	0.5781	14.68	5/8-18	16,0	133,0	83,0	63,0	48,0	51938	
14,8 mm	0.5827			16,0	133,0	83,0	63,0	48,0	63993	
15,0 mm	0.5906		M16 X 1	16,0	133,0	83,0	63,0	48,0	63994	
15,5 mm	0.6102		M18 X 2,5	16,0	133,0	83,0	63,0	48,0	63995	
15,8 mm	0.6220			16,0	133,0	83,0	63,0	48,0	63996	
5/8	0.6250	15.88	11/16-16	16,0	133,0	83,0	63,0	48,0	51939	
16,0 mm	0.6299			16,0	133,0	83,0	63,0	48,0	63997	
21/32	0.6562	16.67	3/4-10	18,0	143,0	93,0	71,0	48,0	51940	
11/16	0.6875	17.46	3/4-16	18,0	143,0	93,0	71,0	48,0	51941	
3/4	0.7500	19.05	13/16-16	20,0	153,0	101,0	77,0	50,0	51942	

FRACTIONAL
ICe-Carb®

Series 140 5D Fractional		Hardness	Vc (sfm)	DC • in							
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536			1/8	3/16	1/4	3/8	1/2	5/8	3/4	
	≤ 175 Bhn or ≤ 7 HRc	425 (340-510)	RPM	12988	8659	6494	4329	3247	2598	2165	
			Fr	0.0039	0.0059	0.0079	0.0118	0.0157	0.0196	0.0236	
	≤ 275 Bhn or ≤ 28 HRc	380 (304-456)	RPM	11613	7742	5806	3871	2903	2323	1935	
			Fr	0.0035	0.0053	0.0071	0.0106	0.0141	0.0177	0.0212	
	≤ 425 Bhn or ≤ 45 HRc	220 (176-264)	RPM	6723	4482	3362	2241	1681	1345	1121	
			Fr	0.0030	0.0045	0.0059	0.0089	0.0119	0.0149	0.0178	
	≤ 275 Bhn or ≤ 28 HRc	330 (264-396)	RPM	10085	6723	5042	3362	2521	2017	1681	
			Fr	0.0030	0.0045	0.0059	0.0089	0.0119	0.0149	0.0178	
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	200 (160-240)	RPM	6112	4075	3056	2037	1528	1222	1019
				Fr	0.0025	0.0038	0.0051	0.0076	0.0101	0.0127	0.0152
		≤ 450 Bhn or ≤ 48 HRc	140 (112-168)	RPM	4278	2852	2139	1426	1070	856	713
				Fr	0.0018	0.0027	0.0036	0.0054	0.0072	0.0090	0.0108
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 185 Bhn or ≤ 9 HRc	305 (244-366)	RPM	9321	6214	4660	3107	2330	1864	1553
				Fr	0.0026	0.0039	0.0051	0.0077	0.0103	0.0129	0.0154
		≤ 275 Bhn or ≤ 28 HRc	195 (156-234)	RPM	5959	3973	2980	1986	1490	1192	993
				Fr	0.0020	0.0030	0.0040	0.0060	0.0081	0.0101	0.0121
		≤ 375 Bhn or ≤ 40 HRc	150 (120-180)	RPM	4584	3056	2292	1528	1146	917	764
				Fr	0.0020	0.0030	0.0040	0.0060	0.0079	0.0099	0.0119
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 375 Bhn or ≤ 40 HRc	110 (88-132)	RPM	3362	2241	1681	1121	840	672	560
				Fr	0.0018	0.0027	0.0036	0.0054	0.0071	0.0089	0.0107
		≤ 220 Bhn or ≤ 19 HRc	360 (288-432)	RPM	11002	7334	5501	3667	2750	2200	1834
				Fr	0.0045	0.0068	0.0091	0.0136	0.0182	0.0227	0.0273
	CAST IRONS Gray, Malleable, Ductile	≤ 260 Bhn or ≤ 26 HRc	335 (268-402)	RPM	10238	6825	5119	3413	2559	2048	1706
				Fr	0.0045	0.0068	0.0091	0.0136	0.0182	0.0227	0.0273

continued on next page

Series 140 5D Fractional		Hardness	Vc (sfm)	DC • in						
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075			1/8	3/16	1/4	3/8	1/2	5/8	3/4
	≤ 80 Bhn or ≤ 47 HRb	770 (616-924)	RPM Fr Feed (ipm)	23531 0.0049 115.0	15687 0.0073 115.0	11766 0.0098 115.0	7844 0.0147 115.0	5883 0.0195 115.0	4706 0.0244 115.0	
	≤ 150 Bhn or ≤ 7 HRc	660 (528-792)	RPM Fr Feed (ipm)	20170 0.0050 100.0	13446 0.0074 100.0	10085 0.0099 100.0	6723 0.0149 100.0	5042 0.0198 100.0	4034 0.0248 100.0	
	≤ 140 Bhn or ≤ 3 HRc	550 (440-660)	RPM Fr Feed (ipm)	16808 0.0020 33.5	11205 0.0030 33.5	8404 0.0040 33.5	5603 0.0060 33.5	4202 0.0080 33.5	3362 0.0100 33.5	
	≤ 200 Bhn or ≤ 23 HRc	440 (352-528)	RPM Fr Feed (ipm)	13446 0.0020 27.0	8964 0.0030 27.0	6723 0.0040 27.0	4482 0.0060 27.0	3362 0.0080 27.0	2689 0.0100 27.0	
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 300 Bhn or ≤ 32 HRc	95 (76-114)	RPM Fr Feed (ipm)	2903 0.0008 2.3	1935 0.0012 2.3	1452 0.0016 2.3	968 0.0024 2.3	726 0.0032 2.3	581 0.0040 2.3
		≤ 400 Bhn or ≤ 43 HRc	50 (40-60)	RPM Fr Feed (ipm)	1528 0.0007 1.0	1019 0.0010 1.0	764 0.0013 1.0	509 0.0020 1.0	382 0.0026 1.0	306 0.0033 1.0
		≤ 275 Bhn or ≤ 28 HRc	215 (172-258)	RPM Fr Feed (ipm)	6570 0.0018 11.5	4380 0.0026 11.5	3285 0.0035 11.5	2190 0.0053 11.5	1643 0.0070 11.5	1314 0.0088 11.5
		≤ 350 Bhn or ≤ 38 HRc	160 (128-192)	RPM Fr Feed (ipm)	4890 0.0016 7.8	3260 0.0024 7.8	2445 0.0032 7.8	1630 0.0048 7.8	1222 0.0064 7.8	978 0.0080 7.8
		≤ 440 Bhn or ≤ 47 HRc	85 (68-102)	RPM Fr Feed (ipm)	2598 0.0012 3.1	1732 0.0018 3.1	1299 0.0024 3.1	866 0.0036 3.1	649 0.0048 3.1	520 0.0060 3.1
S	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 200 Bhn or ≤ 13 HRc	145 (116-174)	RPM Fr Feed (ipm)	4431 0.0026 11.5	2954 0.0039 11.5	2216 0.0052 11.5	1477 0.0078 11.5	1108 0.0104 11.5	886 0.0130 11.5
		≤ 375 Bhn or ≤ 40 HRc	95 (76-114)	RPM Fr Feed (ipm)	2903 0.0012 3.5	1935 0.0018 3.5	1452 0.0024 3.5	968 0.0036 3.5	726 0.0048 3.5	581 0.0060 3.5
		≤ 475 Bhn or ≤ 50 HRc	85 (68-102)	RPM Fr Feed (ipm)	2598 0.0008 2.0	1732 0.0012 2.0	1299 0.0015 2.0	866 0.0023 2.0	649 0.0031 2.0	520 0.0038 2.0
		≤ 200 Bhn or ≤ 13 HRc	145 (116-174)	RPM Fr Feed (ipm)	4431 0.0026 11.5	2954 0.0039 11.5	2216 0.0052 11.5	1477 0.0078 11.5	1108 0.0104 11.5	886 0.0130 11.5
		≤ 375 Bhn or ≤ 40 HRc	95 (76-114)	RPM Fr Feed (ipm)	2903 0.0012 3.5	1935 0.0018 3.5	1452 0.0024 3.5	968 0.0036 3.5	726 0.0048 3.5	581 0.0060 3.5
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 475 Bhn or ≤ 50 HRc	85 (68-102)	RPM Fr Feed (ipm)	2598 0.0008 2.0	1732 0.0012 2.0	1299 0.0015 2.0	866 0.0023 2.0	649 0.0031 2.0	520 0.0038 2.0

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = Vc x 3.82 / DC

ipm = Fr x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Series 140M 5D Metric		Hardness	Vc (m/min)	DC • mm						
				3	6	8	10	12	14	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc (104-155)	130 RPM Fr Feed (mm/min)	13733 1300	6867 1300	5150 1300	4120 1300	3433 1300	2943 1300	2575 1300
		≤ 275 Bhn or ≤ 28 HRc (93-139)	116 RPM Fr Feed (mm/min)	12279 1050	6140 1050	4605 1050	3684 1050	3070 1050	2631 1050	2302 1050
		≤ 425 Bhn or ≤ 45 HRc (54-80)	67 RPM Fr Feed (mm/min)	7109 505	3555 505	2666 505	2133 505	1777 505	1523 505	1333 505
		≤ 275 Bhn or ≤ 28 HRc (80-121)	101 RPM Fr Feed (mm/min)	10664 760	5332 760	3999 760	3199 760	2666 760	2285 760	1999 760
		≤ 375 Bhn or ≤ 40 HRc (49-73)	61 RPM Fr Feed (mm/min)	6463 400	3231 400	2424 400	1939 400	1616 400	1385 400	1212 400
		≤ 450 Bhn or ≤ 48 HRc (34-51)	43 RPM Fr Feed (mm/min)	4524 195	2262 195	1696 195	1357 195	1131 195	969 195	848 195
		≤ 185 Bhn or ≤ 9 HRc (74-112)	93 RPM Fr Feed (mm/min)	9856 605	4928 605	3696 605	2957 605	2464 605	2112 605	1848 605
		≤ 275 Bhn or ≤ 28 HRc (48-71)	59 RPM Fr Feed (mm/min)	6301 300	3151 300	2363 300	1890 300	1575 300	1350 300	1181 300
		≤ 275 Bhn or ≤ 28 HRc (37-55)	46 RPM Fr Feed (mm/min)	4847 230	2424 230	1818 230	1454 230	1212 230	1039 230	909 230
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 375 Bhn or ≤ 40 HRc (27-40)	34 RPM Fr Feed (mm/min)	3555 150	1777 150	1333 150	1066 150	889 150	762 150	666 150
		≤ 220 Bhn or ≤ 19 HRc (88-132)	110 RPM Fr Feed (mm/min)	11633 1270	5816 1270	4362 1270	3490 1270	2908 1270	2493 1270	2181 1270
		≤ 260 Bhn or ≤ 26 HRc (82-123)	102 RPM Fr Feed (mm/min)	10825 1180	5413 1180	4059 1180	3248 1180	2706 1180	2320 1180	2030 1180
		≤ 80 Bhn or ≤ 47 HRb (188-282)	235 RPM Fr Feed (mm/min)	24882 2945	12441 2945	9331 2945	7465 2945	6220 2945	5332 2945	4665 2945
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 150 Bhn or ≤ 7 HRc (161-241)	201 RPM Fr Feed (mm/min)	21327 2540	10664 2540	7998 2540	6398 2540	5332 2540	4570 2540	3999 2540
		≤ 140 Bhn or ≤ 3 HRc (134-201)	168 RPM Fr Feed (mm/min)	17773 850	8886 850	6665 850	5332 850	4443 850	3808 850	3332 850
		≤ 200 Bhn or ≤ 23 HRc (107-161)	134 RPM Fr Feed (mm/min)	14218 685	7109 685	5332 685	4265 685	3555 685	3047 685	2666 685
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140 Bhn or ≤ 3 HRc (134-201)	168 RPM Fr Feed (mm/min)	17773 850	8886 850	6665 850	5332 850	4443 850	3808 850	3332 850
		≤ 200 Bhn or ≤ 23 HRc (107-161)	134 RPM Fr Feed (mm/min)	14218 685	7109 685	5332 685	4265 685	3555 685	3047 685	2666 685

continued on next page

Series 140M 5D Metric		Hardness	Vc (m/min)	DC • mm							
				3	6	8	10	12	14	16	
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400, Rene, Waspaloy	≤ 300 Bhn or ≤ 32 HRc	29 (23-35)	RPM Fr Feed (mm/min)	3070 0.020 60	1535 0.039 60	1151 0.052 60	921 0.065 60	767 0.078 60	658 0.091 60	576 0.104 60
		≤ 400 Bhn or ≤ 43 HRc	15 (12-18)	RPM Fr Feed (mm/min)	1616 0.015 25	808 0.031 25	606 0.041 25	485 0.052 25	404 0.062 25	346 0.072 25	303 0.083 25
		≤ 275 Bhn or ≤ 28 HRc	66 (52-79)	RPM Fr Feed (mm/min)	6947 0.040 275	3474 0.079 275	2605 0.106 275	2084 0.132 275	1737 0.158 275	1489 0.185 275	1303 0.211 275
		≤ 350 Bhn or ≤ 38 HRc	49 (39-59)	RPM Fr Feed (mm/min)	5170 0.039 200	2585 0.077 200	1939 0.103 200	1551 0.129 200	1293 0.155 200	1108 0.181 200	969 0.206 200
		≤ 440 Bhn or ≤ 47 HRc	26 (21-31)	RPM Fr Feed (mm/min)	2747 0.029 80	1373 0.058 80	1030 0.078 80	824 0.097 80	687 0.117 80	589 0.136 80	515 0.155 80
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 200 Bhn or ≤ 13 HRc	44 (35-53)	RPM Fr Feed (mm/min)	4686 0.061 285	2343 0.122 285	1757 0.162 285	1406 0.203 285	1171 0.243 285	1004 0.284 285	879 0.324 285
		≤ 375 Bhn or ≤ 40 HRc	29 (23-35)	RPM Fr Feed (mm/min)	3070 0.029 90	1535 0.059 90	1151 0.078 90	921 0.098 90	767 0.117 90	658 0.137 90	576 0.156 90
		≤ 475 Bhn or ≤ 50 HRc	26 (21-31)	RPM Fr Feed (mm/min)	2747 0.018 50	1373 0.036 50	1030 0.049 50	824 0.061 50	687 0.073 50	589 0.085 50	515 0.097 50



Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fr x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

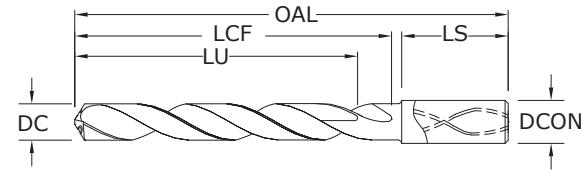

140 8xD

FRACTIONAL & METRIC SERIES

- Coolant through design promotes controlled and consistent operating temperatures improving coolant flow to the cut while maintaining strength
- Split point geometry for improved drill penetration and accuracy
- Controlled edge honing for longevity
- Negative corner position strengthens and protects
- Recommended for materials ≤ 60 HRC (≤ 654 Bhn)

CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	TAP SIZE REFERENCE ONLY	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS	EDP NO.
									Ti-NAMITE-A (AlTiN)
3,0 mm	0.1181			6,0	72,0	34,0	29,0	36,0	63575
3,1 mm	0.1220			6,0	72,0	34,0	29,0	36,0	63576
1/8	0.1250	3.18		6,0	72,0	34,0	29,0	36,0	51801
3,2 mm	0.1260	M3,5 X 0,35		6,0	72,0	34,0	29,0	36,0	63577
3,3 mm	0.1299	M4 X 0,7		6,0	72,0	34,0	29,0	36,0	63578
3,4 mm	0.1339			6,0	72,0	34,0	29,0	36,0	63579
#29	0.1360	3.45	8-32,8-36	6,0	72,0	34,0	29,0	36,0	51802
3,5 mm	0.1378		M4 X 0,5	6,0	72,0	34,0	29,0	36,0	63580
9/64	0.1406	3.57		6,0	72,0	34,0	29,0	36,0	51803
3,6 mm	0.1417		M4 X 0,35	6,0	72,0	34,0	29,0	36,0	63581
3,7 mm	0.1457		M4,5 X 0,75	6,0	72,0	34,0	29,0	36,0	63582
3,8 mm	0.1496		10-24	6,0	81,0	43,0	36,0	36,0	63583
3,9 mm	0.1535			6,0	81,0	43,0	36,0	36,0	63584
5/32	0.1562	3.97		6,0	81,0	43,0	36,0	36,0	51804
4,0 mm	0.1575		M4,5 X 0,5	6,0	81,0	43,0	36,0	36,0	63585
#21	0.1590	4.04	10-32	6,0	81,0	43,0	36,0	36,0	51805
4,1 mm	0.1614			6,0	81,0	43,0	36,0	36,0	63586
4,2 mm	0.1654		M5 / M5 X 0,75	6,0	81,0	43,0	36,0	36,0	63587
4,3 mm	0.1693			6,0	81,0	43,0	36,0	36,0	63588
11/64	0.1719	4.37		6,0	81,0	43,0	36,0	36,0	51806
4,4 mm	0.1732		12-24	6,0	81,0	43,0	36,0	36,0	63589
4,5 mm	0.1772		M5 X 0,5	6,0	81,0	43,0	36,0	36,0	63590
4,6 mm	0.1811		12-28	6,0	81,0	43,0	36,0	36,0	63591
4,7 mm	0.1850		12-32	6,0	81,0	43,0	36,0	36,0	63592
3/16	0.1875	4.76		6,0	95,0	57,0	48,0	36,0	51807
4,8 mm	0.1890		7/32-32	6,0	95,0	57,0	48,0	36,0	63593
4,9 mm	0.1929			6,0	95,0	57,0	48,0	36,0	63594
5,0 mm	0.1969		M6 X 1	6,0	95,0	57,0	48,0	36,0	63595
5,1 mm	0.2008		1/4-20	6,0	95,0	57,0	48,0	36,0	63596
13/64	0.2031	5.16		6,0	95,0	57,0	48,0	36,0	51808
5,2 mm	0.2047		M6 X 0,75	6,0	95,0	57,0	48,0	36,0	63597
5,3 mm	0.2087			6,0	95,0	57,0	48,0	36,0	63598
5,4 mm	0.2126			6,0	95,0	57,0	48,0	36,0	63599
5,5 mm	0.2165		M6 X 0,5	6,0	95,0	57,0	48,0	36,0	63600

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+,.00047

DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+,.00063

DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+,.00083

DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+,.00098

DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+,.00114

DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,0022/+0,012

DCON = h₆

>3-6 DIAMETER

DC = +0,0042/+0,016

DCON = h₆

>6-10 DIAMETER

DC = +0,0062/+0,021

DCON = h₆

>10-18 DIAMETER

DC = +0,0072/+0,025

DCON = h₆

STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

TITANIUM

NON-FERROUS

HARDENED STEELS

For patent information visit
www.ksptpatents.com

140 8xD


FRACTIONAL & METRIC SERIES

inch & mm									EDP NO.	CONTINUED
CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	TAP SIZE REFERENCE ONLY	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS	Ti-NAMITE-A (AITiN)	
7/32	0.2188	5.56	1/4-32	6,0	95,0	57,0	48,0	36,0	51809	
5,6 mm	0.2205			6,0	95,0	57,0	48,0	36,0	63601	
5,7 mm	0.2244			6,0	95,0	57,0	48,0	36,0	63602	
5,8 mm	0.2283			6,0	95,0	57,0	48,0	36,0	63603	
5,9 mm	0.2323			6,0	95,0	57,0	48,0	36,0	63604	
15/64	0.2344	5.95		6,0	95,0	57,0	48,0	36,0	51810	
6,0 mm	0.2362		M7 X 1	6,0	95,0	57,0	48,0	36,0	63605	
6,1 mm	0.2402			8,0	114,0	76,0	64,0	36,0	63606	
6,2 mm	0.2441		M7 X 0,75	8,0	114,0	76,0	64,0	36,0	63607	
6,3 mm	0.2480			8,0	114,0	76,0	64,0	36,0	63608	
1/4	0.2500	6.35		8,0	114,0	76,0	64,0	36,0	51811	
6,4 mm	0.2520			8,0	114,0	76,0	64,0	36,0	63609	
6,5 mm	0.2559			8,0	114,0	76,0	64,0	36,0	63610	
F	0.2570	6.53	5/16-18	8,0	114,0	76,0	64,0	36,0	51812	
6,6 mm	0.2598			8,0	114,0	76,0	64,0	36,0	63611	
6,7 mm	0.2638			8,0	114,0	76,0	64,0	36,0	63612	
17/64	0.2656	6.75	5/16-20	8,0	114,0	76,0	64,0	36,0	51813	
6,8 mm	0.2677		M8 X 1,25	8,0	114,0	76,0	64,0	36,0	63613	
6,9 mm	0.2717			8,0	114,0	76,0	64,0	36,0	63614	
7,0 mm	0.2756		M8 X 1	8,0	114,0	76,0	64,0	36,0	63615	
7,1 mm	0.2795			8,0	114,0	76,0	64,0	36,0	63616	
9/32	0.2812	7.14	5/16-32	8,0	114,0	76,0	64,0	36,0	51814	
7,2 mm	0.2835		M8 X 0,75	8,0	114,0	76,0	64,0	36,0	63617	
7,3 mm	0.2874			8,0	114,0	76,0	64,0	36,0	63618	
7,4 mm	0.2913			8,0	114,0	76,0	64,0	36,0	63619	
7,5 mm	0.2953		M8 X 0,5	8,0	114,0	76,0	64,0	36,0	63620	
19/64	0.2969	7.54		8,0	114,0	76,0	64,0	36,0	51815	
7,6 mm	0.2992			8,0	114,0	76,0	64,0	36,0	63621	
7,7 mm	0.3031			8,0	114,0	76,0	64,0	36,0	63622	
7,8 mm	0.3071		M9 X 1,25	8,0	114,0	76,0	64,0	36,0	63623	
7,9 mm	0.3110			8,0	114,0	76,0	64,0	36,0	63624	
5/16	0.3125	7.94	3/8-16	8,0	114,0	76,0	64,0	36,0	51816	
8,0 mm	0.3150		M9 X 1	8,0	114,0	76,0	64,0	36,0	63625	
8,1 mm	0.3189			10,0	142,0	95,0	80,0	40,0	63626	
8,2 mm	0.3228			10,0	142,0	95,0	80,0	40,0	63627	
8,3 mm	0.3268			10,0	142,0	95,0	80,0	40,0	63628	
21/64	0.3281	8.33	3/8-20	10,0	142,0	95,0	80,0	40,0	51817	
8,4 mm	0.3307			10,0	142,0	95,0	80,0	40,0	63629	
Q	0.3320	8.43	3/8-24	10,0	142,0	95,0	80,0	40,0	51818	
8,5 mm	0.3346		M10 X 1,5	10,0	142,0	95,0	80,0	40,0	63630	
8,6 mm	0.3386			10,0	142,0	95,0	80,0	40,0	63631	
8,7 mm	0.3425			10,0	142,0	95,0	80,0	40,0	63632	

continued on next page



8xD

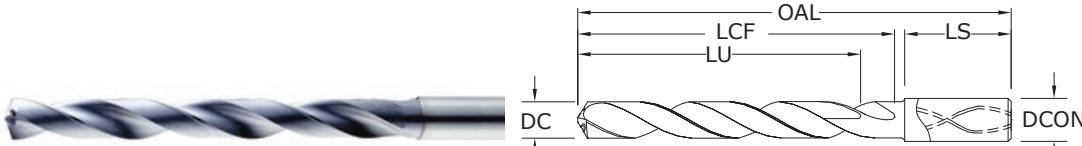**140 8xD**

FRACTIONAL & METRIC SERIES

- Coolant through design promotes controlled and consistent operating temperatures improving coolant flow to the cut while maintaining strength
- Split point geometry for improved drill penetration and accuracy
- Controlled edge honing for longevity
- Negative corner position strengthens and protects
- Recommended for materials ≤ 60 HRc (≤ 654 Bhn)

inch & mm										EDP NO.
CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	TAP SIZE REFERENCE ONLY	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS	Ti-NAMITE-A (AlTiN)	
11/32	0.3438	8.73	3/8-32	10,0	142,0	95,0	80,0	40,0	51819	
8,8 mm	0.3465		M10 X 1,25	10,0	142,0	95,0	80,0	40,0	63633	
8,9 mm	0.3504			10,0	142,0	95,0	80,0	40,0	63634	
9,0 mm	0.3543		M10 X 1	10,0	142,0	95,0	80,0	40,0	63635	
9,1 mm	0.3583			10,0	142,0	95,0	80,0	40,0	63636	
23/64	0.3594	9.13		10,0	142,0	95,0	80,0	40,0	51820	
9,2 mm	0.3622		M10 X 0,75	10,0	142,0	95,0	80,0	40,0	63637	
9,3 mm	0.3661			10,0	142,0	95,0	80,0	40,0	63638	
U	0.3680	9.35	7/16-14	10,0	142,0	95,0	80,0	40,0	51821	
9,4 mm	0.3701			10,0	142,0	95,0	80,0	40,0	63639	
9,5 mm	0.3740		M11 / M10 X 0,5	10,0	142,0	95,0	80,0	40,0	63640	
3/8	0.3750	9.53		10,0	142,0	95,0	80,0	40,0	51822	
9,6 mm	0.3780			10,0	142,0	95,0	80,0	40,0	63641	
9,7 mm	0.3819			10,0	142,0	95,0	80,0	40,0	63642	
9,8 mm	0.3858			10,0	142,0	95,0	80,0	40,0	63643	
9,9 mm	0.3898			10,0	142,0	95,0	80,0	40,0	63644	
25/64	0.3906	9.92	7/16-20	10,0	142,0	95,0	80,0	40,0	51823	
10,0 mm	0.3937			10,0	142,0	95,0	80,0	40,0	63645	
10,1 mm	0.3976			12,0	162,0	114,0	96,0	45,0	63646	
10,2 mm	0.4016		M12 X 1,75	12,0	162,0	114,0	96,0	45,0	63647	
10,3 mm	0.4055			12,0	162,0	114,0	96,0	45,0	63648	
13/32	0.4062	10.32		12,0	162,0	114,0	96,0	45,0	51824	
10,4 mm	0.4094			12,0	162,0	114,0	96,0	45,0	63649	
10,5 mm	0.4134		M12 X 1,5	12,0	162,0	114,0	96,0	45,0	63650	
10,6 mm	0.4173			12,0	162,0	114,0	96,0	45,0	63651	
10,7 mm	0.4213			12,0	162,0	114,0	96,0	45,0	63652	
27/64	0.4219	10.72	1/2-13	12,0	162,0	114,0	96,0	45,0	51825	
10,8 mm	0.4252		M12 X 1,25	12,0	162,0	114,0	96,0	45,0	63653	
10,9 mm	0.4291			12,0	162,0	114,0	96,0	45,0	63654	
11,0 mm	0.4331		M12 X 1	12,0	162,0	114,0	96,0	45,0	63655	
11,1 mm	0.4370			12,0	162,0	114,0	96,0	45,0	63656	
7/16	0.4375	11.11	1/4-18NPT	12,0	162,0	114,0	96,0	45,0	51826	

continued on next page

TOLERANCES (mm)

≤3 DIAMETER
DC = +0,002/+0,012
DCON = h₆

>3–6 DIAMETER
DC = +0,004/+0,016
DCON = h₆

>6–10 DIAMETER
DC = +0,006/+0,021
DCON = h₆

>10–18 DIAMETER
DC = +0,007/+0,025
DCON = h₆

- STEELS
- STAINLESS STEELS
- CAST IRON
- HIGH TEMP ALLOYS
- TITANIUM
- NON-FERROUS
- HARDENED STEELS

For patent information visit
www.ksptpatents.com

140 8xD

FRACTIONAL & METRIC SERIES

CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	TAP SIZE REFERENCE ONLY	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS	EDP NO.	CONTINUED
11,2 mm	0.4409			12,0	162,0	114,0	96,0	45,0	63657	
11,3 mm	0.4449			12,0	162,0	114,0	96,0	45,0	63658	
11,4 mm	0.4488			12,0	162,0	114,0	96,0	45,0	63659	
11,5 mm	0.4528		M12 X 0,5	12,0	162,0	114,0	96,0	45,0	63660	
11,6 mm	0.4567			12,0	162,0	114,0	96,0	45,0	63661	
11,7 mm	0.4606			12,0	162,0	114,0	96,0	45,0	63662	
11,8 mm	0.4646			12,0	162,0	114,0	96,0	45,0	63663	
11,9 mm	0.4685			12,0	162,0	114,0	96,0	45,0	63664	
15/32	0.4688	11.91	1/2-28	12,0	162,0	114,0	96,0	45,0	51827	
12,0 mm	0.4724		M14 X 2	12,0	162,0	114,0	96,0	45,0	63665	
31/64	0.4844	12.30	9/16-12	14,0	178,0	133,0	112,0	45,0	51828	
12,5 mm	0.4921		M14 X 1,5	14,0	178,0	133,0	112,0	45,0	63666	
1/2	0.5000	12.70		14,0	178,0	133,0	112,0	45,0	51829	
12,8 mm	0.5039		M14 X 1,25	14,0	178,0	133,0	112,0	45,0	63667	
13,0 mm	0.5118		M14 X 1	14,0	178,0	133,0	112,0	45,0	63668	
33/64	0.5156	13.10	9/16-18	14,0	178,0	133,0	112,0	45,0	51830	
13,5 mm	0.5315		5/8-11	14,0	178,0	133,0	112,0	45,0	63669	
13,8 mm	0.5433			14,0	178,0	133,0	112,0	45,0	63670	
14,0 mm	0.5512		M16 X 2	14,0	178,0	133,0	112,0	45,0	63671	
9/16	0.5625	14.29		16,0	203,0	152,0	128,0	48,0	51831	
14,5 mm	0.5709		M16 X 1,5	16,0	203,0	152,0	128,0	48,0	63672	
37/64	0.5781	14.68	5/8-18	16,0	203,0	152,0	128,0	48,0	51832	
14,8 mm	0.5827			16,0	203,0	152,0	128,0	48,0	63673	
15,0 mm	0.5906		M16 X 1	16,0	203,0	152,0	128,0	48,0	63674	
15,5 mm	0.6102		M18 X 2,5	16,0	203,0	152,0	128,0	48,0	63675	
15,8 mm	0.6220			16,0	203,0	152,0	128,0	48,0	63676	
5/8	0.6250	15.88	11/16-16	16,0	203,0	152,0	128,0	48,0	51833	
16,0 mm	0.6299			16,0	203,0	152,0	128,0	48,0	63677	
21/32	0.6562	16.67	3/4-10	18,0	222,0	171,0	144,0	48,0	51834	
11/16	0.6875	17.46	3/4-16	18,0	222,0	171,0	144,0	48,0	51835	
3/4	0.7500	19.05	13/16-16	20,0	243,0	190,0	160,0	50,0	51836	

**FRACTIONAL
ICe-Carb®**

Series 140 8D Fractional		Hardness	Vc (sfm)	DC • in							
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536			1/8	3/16	1/4	3/8	1/2	5/8	3/4	
	≤ 175 Bhn or ≤ 7 HRc	405 (324-486)	RPM	12377	8251	6188	4126	3094	2475	2063	
			Fr	0.0036	0.0053	0.0071	0.0107	0.0142	0.0178	0.0213	
			Feed (ipm)	44.0	44.0	44.0	44.0	44.0	44.0	44.0	
	≤ 275 Bhn or ≤ 28 HRc	370 (296-444)	RPM	11307	7538	5654	3769	2827	2261	1885	
			Fr	0.0030	0.0045	0.0060	0.0090	0.0120	0.0150	0.0180	
			Feed (ipm)	34.0	34.0	34.0	34.0	34.0	34.0	34.0	
	≤ 425 Bhn or ≤ 45 HRc	210 (168-252)	RPM	6418	4278	3209	2139	1604	1284	1070	
			Fr	0.0026	0.0039	0.0051	0.0077	0.0103	0.0129	0.0154	
			Feed (ipm)	16.5	16.5	16.5	16.5	16.5	16.5	16.5	
M	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275 Bhn or ≤ 28 HRc	320 (256-384)	RPM	9779	6519	4890	3260	2445	1956	1630
				Fr	0.0026	0.0038	0.0051	0.0077	0.0102	0.0128	0.0153
				Feed (ipm)	25.0	25.0	25.0	25.0	25.0	25.0	25.0
		≤ 375 Bhn or ≤ 40 HRc	190 (152-228)	RPM	5806	3871	2903	1935	1452	1161	968
				Fr	0.0020	0.0030	0.0040	0.0059	0.0079	0.0099	0.0119
				Feed (ipm)	11.5	11.5	11.5	11.5	11.5	11.5	11.5
		≤ 450 Bhn or ≤ 48 HRc	135 (108-162)	RPM	4126	2750	2063	1375	1031	825	688
				Fr	0.0016	0.0024	0.0032	0.0047	0.0063	0.0079	0.0095
				Feed (ipm)	6.5	6.5	6.5	6.5	6.5	6.5	6.5
K	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 185 Bhn or ≤ 9 HRc	290 (232-348)	RPM	8862	5908	4431	2954	2216	1772	1477
				Fr	0.0020	0.0030	0.0039	0.0059	0.0079	0.0099	0.0118
				Feed (ipm)	17.5	17.5	17.5	17.5	17.5	17.5	17.5
		≤ 275 Bhn or ≤ 28 HRc	180 (144-216)	RPM	5501	3667	2750	1834	1375	1100	917
				Fr	0.0018	0.0027	0.0036	0.0055	0.0073	0.0091	0.0109
				Feed (ipm)	10.0	10.0	10.0	10.0	10.0	10.0	10.0
		≤ 275 Bhn or ≤ 28 HRc	130 (104-156)	RPM	3973	2649	1986	1324	993	795	662
				Fr	0.0018	0.0026	0.0035	0.0053	0.0070	0.0088	0.0106
				Feed (ipm)	7.0	7.0	7.0	7.0	7.0	7.0	7.0
K	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 375 Bhn or ≤ 40 HRc	95 (76-114)	RPM	2903	1935	1452	968	726	581	484
				Fr	0.0016	0.0023	0.0031	0.0047	0.0062	0.0078	0.0093
				Feed (ipm)	4.5	4.5	4.5	4.5	4.5	4.5	4.5
		≤ 220 Bhn or ≤ 19 HRc	350 (280-420)	RPM	10696	7131	5348	3565	2674	2139	1783
				Fr	0.0037	0.0056	0.0075	0.0112	0.0150	0.0187	0.0224
				Feed (ipm)	40.0	40.0	40.0	40.0	40.0	40.0	40.0
		≤ 260 Bhn or ≤ 26 HRc	310 (248-372)	RPM	9474	6316	4737	3158	2368	1895	1579
				Fr	0.0039	0.0059	0.0078	0.0117	0.0156	0.0195	0.0234
				Feed (ipm)	37.0	37.0	37.0	37.0	37.0	37.0	37.0

continued on next page

Series 140 8D Fractional		Hardness	Vc (sfm)	DC • in						
				1/8	3/16	1/4	3/8	1/2	5/8	3/4
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80 Bhn or ≤ 47 HRb	730 (584-876)	RPM Fr Feed (ipm)	22309 0.0045 100.0	14873 0.0067 100.0	11154 0.0090 100.0	7436 0.0134 100.0	5577 0.0179 100.0	4462 0.0224 100.0
		≤ 150 Bhn or ≤ 7 HRc	635 (508-762)	RPM Fr Feed (ipm)	19406 0.0046 90.0	12937 0.0070 90.0	9703 0.0093 90.0	6469 0.0139 90.0	4851 0.0186 90.0	3881 0.0232 90.0
		≤ 140 Bhn or ≤ 3 HRc	255 (204-306)	RPM Fr Feed (ipm)	7793 0.0018 14.0	5195 0.0027 14.0	3896 0.0036 14.0	2598 0.0054 14.0	1948 0.0072 14.0	1559 0.0090 14.0
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 200 Bhn or ≤ 23 HRc	235 (188-282)	RPM Fr Feed (ipm)	7182 0.0018 13.0	4788 0.0027 13.0	3591 0.0036 13.0	2394 0.0054 13.0	1795 0.0072 13.0	1436 0.0091 13.0
		≤ 300 Bhn or ≤ 32 HRc	65 (52-78)	RPM Fr Feed (ipm)	1986 0.0009 1.7	1324 0.0013 1.7	993 0.0017 1.7	662 0.0026 1.7	497 0.0034 1.7	331 0.0043 1.7
		≤ 400 Bhn or ≤ 43 HRc	35 (28-42)	RPM Fr Feed (ipm)	1070 0.0006 0.6	713 0.0008 0.6	535 0.0011 0.6	357 0.0017 0.6	267 0.0022 0.6	214 0.0028 0.6
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400, Rene, Waspaloy	≤ 275 Bhn or ≤ 28 HRc	185 (148-222)	RPM Fr Feed (ipm)	5654 0.0016 9.0	3769 0.0024 9.0	2827 0.0032 9.0	1885 0.0048 9.0	1413 0.0064 9.0	1131 0.0080 9.0
		≤ 350 Bhn or ≤ 38 HRc	140 (112-168)	RPM Fr Feed (ipm)	4278 0.0012 5.0	2852 0.0018 5.0	2139 0.0023 5.0	1426 0.0035 5.0	1070 0.0047 5.0	856 0.0058 5.0
		≤ 440 Bhn or ≤ 47 HRc	75 (60-90)	RPM Fr Feed (ipm)	2292 0.0010 2.3	1528 0.0015 2.3	1146 0.0020 2.3	764 0.0030 2.3	573 0.0040 2.3	458 0.0050 2.3
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 200 Bhn or ≤ 13 HRc	140 (112-168)	RPM Fr Feed (ipm)	4278 0.0020 8.5	2852 0.0030 8.5	2139 0.0040 8.5	1426 0.0060 8.5	1070 0.0079 8.5	856 0.0099 8.5
		≤ 375 Bhn or ≤ 40 HRc	90 (72-108)	RPM Fr Feed (ipm)	2750 0.0011 3.0	1834 0.0016 3.0	1375 0.0022 3.0	917 0.0033 3.0	688 0.0044 3.0	550 0.0055 3.0
		≤ 475 Bhn or ≤ 50 HRc	80 (64-96)	RPM Fr Feed (ipm)	2445 0.0006 1.5	1630 0.0009 1.5	1222 0.0012 1.5	815 0.0018 1.5	611 0.0025 1.5	489 0.0031 1.5

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = Vc x 3.82 / DC

ipm = Fr x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Series 140M 8D Metric		Hardness	Vc (m/min)	DC • mm							
				3	6	8	10	12	14	16	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc (100-170)	123	RPM	13087	6544	4908	3926	3272	2804	2454
				Fr	0.085	0.171	0.228	0.285	0.342	0.399	0.455
				Feed (mm/min)	1118	1118	1118	1118	1118	1118	1118
		≤ 275 Bhn or ≤ 28 HRc (90-135)	113	RPM	11956	5978	4484	3587	2989	2562	2242
				Fr	0.072	0.144	0.193	0.241	0.289	0.337	0.385
				Feed (mm/min)	864	864	864	864	864	864	864
		≤ 425 Bhn or ≤ 45 HRc (51-77)	64	RPM	6786	3393	2545	2036	1696	1454	1272
				Fr	0.062	0.124	0.165	0.206	0.247	0.288	0.329
				Feed (mm/min)	419	419	419	419	419	419	419
		≤ 275 Bhn or ≤ 28 HRc (78-117)	98	RPM	10340	5170	3878	3102	2585	2216	1939
				Fr	0.061	0.123	0.164	0.205	0.246	0.287	0.328
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc (46-69)	58	RPM	6140	3070	2302	1842	1535	1316	1151
				Fr	0.048	0.095	0.127	0.159	0.190	0.222	0.254
				Feed (mm/min)	292	292	292	292	292	292	292
		≤ 450 Bhn or ≤ 48 HRc (33-49)	41	RPM	4362	2181	1636	1309	1091	935	818
				Fr	0.038	0.076	0.101	0.126	0.151	0.177	0.202
				Feed (mm/min)	165	165	165	165	165	165	165
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 185 Bhn or ≤ 9 HRc (71-106)	88	RPM	9371	4686	3514	2811	2343	2008	1757
				Fr	0.047	0.095	0.126	0.158	0.190	0.221	0.253
				Feed (mm/min)	445	445	445	445	445	445	445
		≤ 275 Bhn or ≤ 28 HRc (44-66)	55	RPM	5816	2908	2181	1745	1454	1246	1091
				Fr	0.044	0.087	0.116	0.146	0.175	0.204	0.233
				Feed (mm/min)	254	254	254	254	254	254	254
K	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc (32-48)	40	RPM	4201	2100	1575	1260	1050	900	788
				Fr	0.042	0.085	0.113	0.141	0.169	0.198	0.226
				Feed (mm/min)	178	178	178	178	178	178	178
		≤ 375 Bhn or ≤ 40 HRc (23-35)	29	RPM	3070	1535	1151	921	767	658	576
				Fr	0.037	0.074	0.099	0.124	0.149	0.174	0.199
				Feed (mm/min)	114	114	114	114	114	114	114
K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc (85-128)	107	RPM	11310	5655	4241	3393	2827	2424	2121
				Fr	0.090	0.180	0.240	0.299	0.359	0.419	0.479
				Feed (mm/min)	1016	1016	1016	1016	1016	1016	1016
		≤ 260 Bhn or ≤ 26 HRc (76-113)	94	RPM	10017	5009	3756	3005	2504	2147	1878
				Fr	0.094	0.188	0.250	0.313	0.375	0.438	0.500
				Feed (mm/min)	940	940	940	940	940	940	940

continued on next page

Series 140M 8D Metric		Hardness	Vc (m/min)	DC • mm						
				3	6	8	10	12	14	16
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80 Bhn or ≤ 47 HRb	223 (178-267)	RPM Fr Feed (mm/min)	23589 0.108 2540	11795 0.215 2540	8846 0.287 2540	7077 0.359 2540	5897 0.431 2540	5055 0.502 2540
		≤ 150 Bhn or ≤ 7 HRc	194 (155-232)	RPM Fr Feed (mm/min)	20519 0.111 2286	10260 0.223 2286	7695 0.297 2286	6156 0.371 2286	5130 0.446 2286	4397 0.520 2286
		≤ 140 Bhn or ≤ 3 HRc	78 (62-93)	RPM Fr Feed (mm/min)	8240 0.043 356	4120 0.086 356	3090 0.115 356	2472 0.144 356	2060 0.173 356	1766 0.201 356
		≤ 200 Bhn or ≤ 23 HRc	72 (57-86)	RPM Fr Feed (mm/min)	7594 0.043 330	3797 0.087 330	2848 0.116 330	2278 0.145 330	1898 0.174 330	1627 0.203 330
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400, Rene, Waspaloy	≤ 300 Bhn or ≤ 32 HRc	20 (16-24)	RPM Fr Feed (mm/min)	2100 0.021 43	1050 0.041 43	788 0.055 43	630 0.069 43	525 0.082 43	450 0.096 43
		≤ 400 Bhn or ≤ 43 HRc	11 (9-13)	RPM Fr Feed (mm/min)	1131 0.013 15	565 0.027 15	424 0.036 15	339 0.045 15	283 0.054 15	242 0.063 15
		≤ 275 Bhn or ≤ 28 HRc	56 (45-68)	RPM Fr Feed (mm/min)	5978 0.038 229	2989 0.076 229	2242 0.102 229	1793 0.127 229	1495 0.153 229	1281 0.178 229
		≤ 350 Bhn or ≤ 38 HRc	43 (34-51)	RPM Fr Feed (mm/min)	4524 0.028 127	2262 0.056 127	1696 0.075 127	1357 0.094 127	1131 0.112 127	969 0.131 127
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 440 Bhn or ≤ 47 HRc	23 (18-27)	RPM Fr Feed (mm/min)	2424 0.024 58	1212 0.048 58	909 0.064 58	727 0.080 58	606 0.096 58	519 0.112 58
		≤ 200 Bhn or ≤ 13 HRc	43 (34-51)	RPM Fr Feed (mm/min)	4524 0.048 216	2262 0.095 216	1696 0.127 216	1357 0.159 216	1131 0.191 216	969 0.223 216
		≤ 375 Bhn or ≤ 40 HRc	27 (22-33)	RPM Fr Feed (mm/min)	2908 0.026 76	1454 0.052 76	1091 0.070 76	872 0.087 76	727 0.105 76	623 0.122 76
		≤ 475 Bhn or ≤ 50 HRc	24 (20-29)	RPM Fr Feed (mm/min)	2585 0.015 38	1293 0.029 38	969 0.039 38	776 0.049 38	646 0.059 38	554 0.069 38

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fr x rpm

reduce speed and feed for materials harder than listed


refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

FRACTIONAL & METRIC

Series 120



3xD

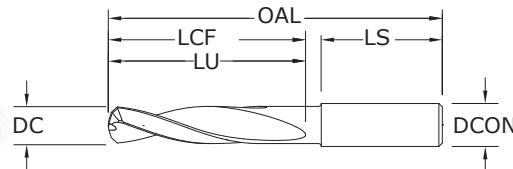

120

FRACTIONAL & METRIC SERIES

- Double margin design stabilizes the drill for greater hole accuracy and improved surface finish
- Notched point reduces thrust force over conventional designs
- 8 facet point reduces fiber breakout and delamination on exit
- 90 degree secondary chamfer angle improves hole entrance and exit quality

CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF/LU	SHANK LENGTH LS	EDP NO.
#40	0.0980	2.49	1/8	2	9/16	1-1/4	50000
2,7 mm	0.1063		6,0	63,0	20,0	32,0	50001
3,0 mm	0.1181		6,0	63,0	20,0	36,0	50002
1/8	0.1250	3.18	1/4	2-1/2	3/4	1-7/16	50003
3,2 mm	0.1260		6,0	63,0	20,0	36,0	50004
#30	0.1285	3.26	1/4	2-1/2	3/4	1-7/16	50005
#28	0.1405	3.57	1/4	2-1/2	3/4	1-7/16	50006
#22	0.1570	3.99	1/4	2-5/8	7/8	1-7/16	50007
#21	0.1590	4.04	1/4	2-5/8	7/8	1-7/16	50008
4,1 mm	0.1614		6,0	66,0	24,0	36,0	50009
#19	0.1660	4.22	1/4	2-5/8	7/8	1-7/16	50010
11/64	0.1719	4.37	1/4	2-5/8	7/8	1-7/16	50011
3/16	0.1875	4.76	1/4	2-5/8	1	1-7/16	50012
#11	0.1910	4.85	1/4	2-5/8	1	1-7/16	50013
#8	0.1990	5.05	1/4	2-5/8	1	1-7/16	50014
#7	0.2010	5.11	1/4	2-5/8	1	1-7/16	50015
#2	0.2210	5.61	1/4	2-5/8	1	1-7/16	50016
6,0 mm	0.2362		6,0	66,0	28,0	36,0	50017
1/4	0.2500	6.35	1/4	3-1/8	1-5/16	1-7/16	50018
.2510	0.2510	6.38	5/16	3-1/8	1-5/16	1-7/16	50019
F	0.2570	6.53	5/16	3-1/8	1-5/16	1-7/16	50020
I	0.2720	6.91	5/16	3-1/8	1-5/16	1-7/16	50021
J	0.2770	7.04	5/16	3-1/8	1-5/16	1-7/16	50022
K	0.2810	7.14	5/16	3-1/8	1-9/16	1-7/16	50023
5/16	0.3125	7.94	5/16	3-1/8	1-9/16	1-7/16	50024
8,0 mm	0.3150		8,0	79,0	41,0	36,0	50025
3/8	0.3750	9.53	3/8	3-1/2	1-27/32	1-9/16	50026
V	0.3770	9.58	1/2	3-1/2	1-27/32	1-9/16	50027
10,0 mm	0.3937		10,0	89,0	47,0	40,0	50028
7/16	0.4375	11.11	1/2	4-1/16	2-3/16	1-9/16	50029
12,0 mm	0.4724		12,0	102,0	55,0	45,0	50030
1/2	0.5000	12.70	1/2	4-1/4	2-5/16	1-3/4	50031

TOLERANCES (inch)

DC = +0,000/-0,005
DCON = h₆

TOLERANCES (mm)

DC = +0,000/-0,013
DCON = h₆

PLASTICS/COMPOSITES

For patent information visit www.ksptpatents.com

Series 120

Series 120 Fractional		Vc (sfm)		DC • in						
N	CFRP, AFRP (Carbon Fiber, Aramid Fiber)	320	RPM	1/8	3/16	1/4	5/16	3/8	7/16	1/2
		(256-384)	Fr	0.0006	0.0009	0.0012	0.0015	0.0018	0.0021	0.0024
			Feed (ipm)	5.9	5.9	5.9	5.9	5.9	5.9	5.9
N	GFRP (Fiberglass)	240	RPM	7334	4890	3667	2934	2445	2096	1834
		(192-288)	Fr	0.0006	0.0009	0.0012	0.0015	0.0018	0.0021	0.0024
			Feed (ipm)	4.4	4.4	4.4	4.4	4.4	4.4	4.4
N	CARBON, GRAPHITE	400	RPM	12224	8149	6112	4890	4075	3493	3056
		(320-480)	Fr	0.0008	0.0012	0.0016	0.0020	0.0024	0.0028	0.0032
			Feed (ipm)	9.8	9.8	9.8	9.8	9.8	9.8	9.8

rpm = Vc x 3.82 / DC

ipm = Fr x rpm

adjust speed and / or feed based on resin type and / or fiber structure

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Series 120 Metric		Vc (m/min)		DC • mm						
N	CFRP, AFRP (Carbon Fiber, Aramid Fiber)	100	RPM	2.5	3	4	6	8	10	12
		(80-120)	Fr	0.012	0.014	0.019	0.028	0.038	0.047	0.057
			Feed (mm/min)	150	150	150	150	150	150	150
N	GFRP (Fiberglass)	75	RPM	9542	7951	5963	3976	2982	2385	1988
		(65-90)	Fr	0.012	0.014	0.019	0.029	0.039	0.048	0.058
			Feed (mm/min)	115	115	115	115	115	115	115
N	CARBON, GRAPHITE	120	RPM	15266	12722	9542	6361	4771	3817	3181
		(96-144)	Fr	0.015	0.018	0.025	0.037	0.049	0.062	0.074
			Feed (mm/min)	235	235	235	235	235	235	235

rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fr x rpm

adjust speed and / or feed based on resin type and / or fiber structure

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)